
# 2025

# **PRODUCT APPLICATIONS**





ADAPT SOLUTIONS 30/10/2025

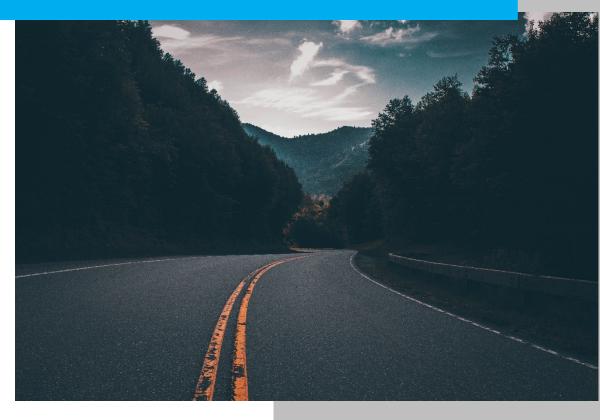

## **2026 PRODUCT APPLICATIONS**

CLICK HERE FOR ADAPT SOLUTIONS PRODUCT OVERVIEW VIDEO

**SEARCH BY PRODUCT:** Click on the **PICTURE** for the overview page. Click on the **VEHICLE LIST** for the 'Quick Reference' page. Once you find the vehicle application you are looking for, click on it to reach the detailed application information.





















**SEARCH BY MAKE / MODEL:** Click on a **BRAND** to reach a list of vehicle models. Click on the **PRODUCT NAME** to reach the detailed application information. *Click on BACK at the bottom of any page to return here.* 

Need Assistance? CHAT WITH US





























## **CHRYSLER APPLICATIONS**

MODEL	YEAR	LINK	XL-SEAT ASENTO	SPEEDY LIFT
Caravan / Town & Country- Stow 'N Go	2005 - 2007		✓★ (driver only)	✓
Caravan / Town & Country - Without Stow 'N Go	2005 - 2007		√ WITH HI-LIFT	✓
Caravan / Town & Country - <b>Short wheelbase</b>	2001 - 2007		√ WITH HI-LIFT	
Caravan / Town & Country - Long wheelbase	2001 - 2007		✓ WITH HI-LIFT	
Caravan / Town & Country - Swivel 'N Go	2008 - 2011		✓ WITH HI-LIFT	
Caravan / Town & Country - <b>Stow 'N Go</b>	2005 - 2020		✓ WITH HI-LIFT	✓
Caravan / Town & Country	2008 - 2020	✓ DRIVER* /PASSENGER ✓ 2 <sup>nd</sup> ROW	✓ WITH HI-LIFT	✓
Grand Caravan	2021 - 2026	✓ DRIVER/PASSENGER ✓ 2 <sup>nd</sup> ROW	✓ ASENTO	<b>√</b> *
Pacifica	2017 - 2026	✓ DRIVER/PASSENGER ✓ 2 <sup>nd</sup> ROW	√ ASENTO	<b>√</b> *
Voyager	2020 - 2026	✓ DRIVER/PASSENGER ✓ 2 <sup>nd</sup> ROW	√ ASENTO	<b>√</b> *
Journey	2008 - 2020	√* PASSENGER		
Ram Extended Cab/Quad Cab - Suicide door	1998 - 2002		✓	
Ram Reg Cab - <b>2 door</b>	2002 - 2008		<b>√</b>	
Ram Quad Cab - <b>4 door</b>	2002 - 2008		✓	
Ram Mega Cab - <b>4 large doors</b>	2006 - 2008		✓	
Ram Quad Cab / Crew Cab CLASSIC- 4 door	2009 - 2018	√ PASSENGER	✓	
Ram 2500/3500 Crew Cab/Mega Cab- <b>4 door</b>	2010 - 2018	√ PASSENGER	✓	
Ram 2500/3500 Crew Cab - <b>4 door</b>	2019 - 2026	√ PASSENGER	NOT AVAILABLE	
Ram 1500 Quad Cab - <b>4 door</b>	2019 - 2026	√ DRIVER*/PASSENGER	✓ ASENTO	
Ram 1500 Crew Cab - <b>4 door</b>	2019 - 2026	√ DRIVER*/PASSENGER	✓ ASENTO	
Jeep Gladiator	2020 - 2026	√ DRIVER / PASSENGER		
Jeep Grand Cherokee	2011 - 2022	√* PASSENGER		
Jeep Wrangler - <b>4 door</b>	2007 - 2018		<b>√</b> *	
Jeep Wrangler - <b>4 door</b>	2018 - 2026	√* DRIVER / PASSENGER		

<sup>\*</sup>Caravan 2008-2020 - LINK: Steering column must be telescopic.

**NOT AVAILABLE** 8 passengers LXi model.

<sup>\*</sup>Chrysler Pacifica PINNACLE 2021-2026 SPEEDY-LIFT & LINK: NOT AVAILABLE for mid-row

<sup>\*</sup>Voyager 2020-2026 - SPEEDY-LIFT: NOT AVAILABLE PASSENGER side model with bench seat & NOT AVAILABLE 8 passengers LXi model.

<sup>\*</sup>Grand Caravan 2021-2026 - **SPEEDY-LIFT**: **NOT AVAILABLE** PASSENGER side model with bench seat &

<sup>\*</sup>Jeep Grand Cherokee 2011-2022 NOT AVAILABLE for model with MANUAL SEATS & NOT AVAILABLE for WL Platform.

<sup>\*</sup>Jeep Wrangler - 4 door 2018-2026 - LINK: NOT AVAILABLE for JK model (2018).

<sup>\*</sup>Jeep Wrangler - 4 door 2007-2018 - XL-SEAT: NOT AVAILABLE for JL model (2018).

<sup>\*</sup>Journey 2008–2020 - LINK: ONLY AVAILABLE for model with SEAT STORAGE

<sup>\*</sup>Ram 1500 Crew/Quad 2019-2026: **NOT AVAILABLE** for RAM CLASSIC – **2018 model**.

<sup>\*</sup>Ram 1500 Crew/Quad 2019-2026: NOT AVAILABLE for RAM TUNGSTEN Trim Level - 2025 model.



## **FORD APPLICATIONS**

MODEL	YEAR	LINK	XL-SEAT ASENTO	SPEEDY LIFT
Mark LT - 4 door	2006 - 2008		✓	
F-150 Reg Cab - <b>2 door</b>	2004 - 2008		✓	
F-150 Reg Cab - <b>2 door (small suicide door)</b>	2009 - 2010		✓	
F-150 Super Cab - <b>Suicide door</b>	2004 - 2008		✓	
F-150 Super Crew Cab - <b>4 door</b>	2004 - 2008		✓	
F-150 Super Cab - <b>Suicide door</b>	2009 - 2014	√ DRIVER / PASSENGER	<b>√</b> *	
F-150 Super Crew Cab - <b>4 door</b>	2009 - 2014	√ DRIVER / PASSENGER	✓	
F-150 Super Cab – <b>Suicide door</b>	2015 - 2020	√ DRIVER / PASSENGER	<b>√</b> *	
F-150 Super Crew Cab – <b>4 door</b>	2015 - 2020	√ DRIVER / PASSENGER	✓	
F-150 Super Cab – <b>Suicide door</b>	2021 - 2026	√ DRIVER / PASSENGER		
F-150 Super Crew Cab – <b>4 door</b>	2021 - 2026	√ DRIVER / PASSENGER	✓	
F-150 Raptor Super Cab - <b>Suicide door</b>	2011 - 2016	√ * DRIVER / PASSENGER	<b>√</b> *	
F-150 Raptor Super Crew Cab - <b>4 door</b>	2011 - 2016	√ * DRIVER / PASSENGER	✓	
F-150 Raptor Super Cab - <b>Suicide door</b>	2017 - 2026	√ DRIVER / PASSENGER	√*	
F-150 Raptor Super Crew Cab - <b>4 door</b>	2017 - 2026	√ DRIVER / PASSENGER	✓	
F-250, F-350, F-450 Super Cab - <b>Suicide door</b>	2008 - 2010		✓	
F-250, F-350, F-450 Super Crew Cab - <b>4 door</b>	2008 - 2010		✓	
F-250, F-350, F-450 Super Cab - <b>Suicide door</b>	2011 - 2016	DRIVER / PASSENGER	✓	
F-250, F-350, F-450 Super Crew Cab - <b>4 door</b>	2011 - 2016	√ DRIVER / PASSENGER	✓	
F-250, F-350, F-450 Super Cab - <b>Suicide door</b>	2017 - 2026	√ DRIVER / PASSENGER	✓	
F-250, F-350, F-450 Super Crew Cab - <b>4 door</b>	2017 - 2026	DRIVER / PASSENGER	✓	
Ranger Super Crew Cab - 4 door	2019 - 2023	√* PASSENGER	√ ASENTO	

<sup>\*</sup> Ford F-150 Super Cab - Suicide door Asento **NOT AVAILABLE** for model with **ONLY 2 DOORS**.

<sup>\*</sup> Ford F-150 Raptor Super Cab - Suicide door Asento **NOT AVAILABLE for model with ONLY 2 DOORS**.

<sup>\*</sup> Raptor Super Cab - Suicide door / 4 door 2011 only - NOT AVAILABLE for model with 4 load cells.

<sup>\*</sup> Ranger Super Crew Cap - **NOT AVAILABLE** for models with **POWER SEAT** 



## **FORD APPLICATIONS**

MODEL	YEAR	LINK	XL-SEAT ASENTO	SPEEDY LIFT
Explorer	2011 - 2015	√ PASSENGER	✓	
Explorer	2016 - 2019	√ PASSENGER	✓	
Explorer	2020 - 2026	<b>*√</b> DRIVER / PASSENGER	*✓	
Escape	2013 - 2019	√ PASSENGER		
Escape	2020 - 2026	√ PASSENGER		
Expedition / Navigator	2007 - 2017	√ PASSENGER		
Expedition / Navigator	2018 - 2024	* ✓ DRIVER/PASSENGER  * ✓ 2 <sup>nd</sup> ROW	√* ASENTO	
Edge	2011 - 2014		✓	
Edge	2015 - 2024	√ PASSENGER	✓ ASENTO	
Lincoln MKX	2016 - 2018	√ PASSENGER	✓ ASENTO	
Lincoln Nautilus	2019 - 2023	√ PASSENGER	✓ ASENTO	

<sup>\*2018-2024</sup> Ford Expedition FRONT- LINK: NOT AVAILABLE for model with MANUAL SEAT.

<sup>\*2018-2024</sup> Lincoln Navigator FRONT- LINK: NOT AVAILABLE for model with PERFECT POSITION SEAT.

<sup>\*2018-2024</sup> Ford Expedition & Lincoln Navigator 2<sup>ND</sup> ROW - LINK: **AVAILABLE ONLY** for **LONG WHEELBASE** model (Navigator L & Expedition MAX) \*2018-2024 Ford Expedition - ASENTO: **NOT AVAILABLE** for model with **PERFECT POSITION SEAT** or model with **MANUAL SEAT** 

<sup>\*2020-2026</sup> Ford Explorer - ASENTO & LINK: NOT AVAILABLE for model with MANUAL SEAT



## **GENERAL MOTORS APPLICATIONS**

MODEL	YEAR	LINK	XL-SEAT ASENTO	SPEEDY LIFT
Avalanche	2007 - 2013	√ DRIVER / PASSENGER	✓	
Canyon / Colorado Extended Cab - Suicide door	2004 - 2012		✓	
Canyon / Colorado Extended Cab- <b>Suicide door</b>	2015 - 2022	√ DRIVER*/ PASSENGER*	√ ASENTO	
Canyon / Colorado Crew Cab- <b>4 door</b>	2015 - 2022	√ DRIVER*/ PASSENGER	√ ASENTO	
Sierra / Silverado Regular Cab-1500- <b>2 door</b>	1999 - 2013		✓	
Sierra / Silverado Extended Cab-1500- <b>No suicide</b> door	1999 - 2002		✓	
Sierra / Silverado Extended Cab-1500- Suicide door	2001 - 2006		✓	
Sierra / Silverado Extended Cab-1500- Suicide door	2007 - 2013	√ DRIVER / PASSENGER	✓	
Sierra / Silverado Double Cab-1500- <b>4 door (2</b> smaller)	2014 - 2018	√ DRIVER / PASSENGER	√ ASENTO	
Sierra / Silverado Crew Cab-1500- <b>4 door</b>	2007 - 2013	√ DRIVER / PASSENGER	✓	
Sierra / Silverado Crew Cab-1500- <b>4 door</b>	2014 - 2018	√ DRIVER / PASSENGER	√ ASENTO	
Sierra / Silverado Crew Cab-1500- <b>4 door</b>	2019 - 2026	√ DRIVER / PASSENGER	√ <del>*</del> ASENTO	
Sierra / Silverado Double Cab-1500- <b>4 door (2</b> smaller)	2019 - 2026	√ DRIVER / PASSENGER	√* ASENTO	
Sierra / Silverado <b>HD</b> -2500 / 3500- <b>All models</b>	2007 - 2014	√ DRIVER / PASSENGER	✓	
Sierra / Silverado <b>HD</b> -2500 / 3500- <b>All models</b>	2015 - 2026	√ DRIVER / PASSENGER	√* ASENTO	
Escalade / Suburban / Tahoe / Yukon - <b>All models</b>	2007 - 2014	√ DRIVER / PASSENGER	✓	
Escalade / Suburban / Tahoe / Yukon - <b>All models</b>	2015 - 2020	√ DRIVER / PASSENGER	√ ASENTO	
Escalade / Suburban / Tahoe / Yukon - <b>All models</b>	2021 - 2026	√ DRIVER / PASSENGER	√ ASENTO	
Blazer	2019 - 2026	√ DRIVER / PASSENGER*	✓ ★ ASENTO	

<sup>\*2015–2022</sup> **Canyon / Colorado Ext Cab** - LINK: Rear door must be opened for operation.

<sup>\*2015–2022</sup> **Canyon / Colorado Crew Cab** - LINK: Steering column must be telescopic.

<sup>\*2019–2026</sup> Blazer - ASENTO & LINK: NOT AVAILABLE for ELECTRIC MODEL (BLAZER EV)

<sup>\*2019–2026</sup> Sierra / Silverado - ASENTO: NOT AVAILABLE for ELECTRIC MODEL

<sup>\*2015-2026</sup> Sierra / Silverado HD-2500 / 3500- All models - ASENTO: NOT AVAILABLE for ELECTRIC MODEL



## **GENERAL MOTORS APPLICATIONS**

MODEL	YEAR	LINK	XL-SEAT ASENTO	SPEEDY LIFT
Acadia (See note on Limited)	2008 - 2016	√* PASSENGER		
Acadia	2017 - 2023	√ DRIVER / PASSENGER	✓ ASENTO	
Cadillac XT6	2020 - 2025	√ DRIVER / PASSENGER		
Enclave	2008 - 2017	√ PASSENGER		
Enclave	2018 - 2024	√ * DRIVER / PASSENGER & 2 <sup>nd</sup> ROW	√ ASENTO	
Enclave	2025 - 2026	√ * PASSENGER		
Terrain / Equinox	2010 - 2017	√ PASSENGER		
Terrain / Equinox	2018 - 2024	√ DRIVER / PASSENGER	✓ ASENTO	
Traverse	2008 - 2017	√ PASSENGER		
Traverse	2018 - 2023	√ * DRIVER / PASSENGER & 2 <sup>nd</sup> ROW	√ ASENTO	
Traverse	2024 - 2026	√ * PASSENGER		

<sup>\*</sup>GMC Acadia Limited 2017 is the 2008-2016 body style.

<sup>\*</sup>Traverse 2024-2026 - LINK: NOT AVAILABLE in driver side.



## **HONDA APPLICATIONS**

MODEL	YEAR	LINK	XL-SEAT ASENTO	SPEEDY LIFT
Odyssey	2005 - 2010		√ WITH HI-LIFT	✓
Odyssey	2011 - 2017		✓	✓
Odyssey	2018 - 2026	√2 <sup>nd</sup> ROW	√ ASENTO	✓



## **HYUNDAI APPLICATIONS**

MODEL	YEAR	LINK	XL-SEAT ASENTO	SPEEDY LIFT
Palisade	2020 - 2025	√  DRIVER*/ PASSENGER*	<b>√</b> *	

<sup>\*</sup>Palisade 2020-2025 - LINK & ASENTO: NOT AVAILABLE for models with MANUAL SEATS

<sup>\*</sup>Enclave 2018-2024 - LINK: NOT AVAILABLE in driver position for model with manual seat. | 2<sup>nd</sup> Row, NOT AVAILABLE for 8 passenger model.

<sup>\*</sup>Traverse 2018-2023 – LINK: NOT AVAILABLE in driver position for model with manual seat. | 2<sup>nd</sup> Row, NOT AVAILABLE for 8 passenger model.



## **KIA APPLICATIONS**

MODEL	YEAR	LINK	XL-SEAT ASENTO	SPEEDY LIFT
Carnival	2022 - 2026	√ DRIVER* / PASSENGER & 2 <sup>nd</sup> ROW*	<b>√</b> *	<b>√</b> *
Sedona	2006 - 2012	√2 <sup>nd</sup> ROW		
Sedona	2012 - 2014	√2 <sup>nd</sup> ROW		
Sedona	2015 - 2021	PASSENGER & 2 <sup>nd</sup> ROW*	✓	<b>√</b> *
Telluride	2020 - 2025	√ DRIVER*/ PASSENGER*	√*	
Ev9	2023 - 2026	√ DRIVER*/ PASSENGER*		

<sup>\*</sup>Sedona 2015-2021 - NOT AVAILABLE for models with OEM footrest | Discontinued in Canada 2019-2020 model.

<sup>\*</sup>Ev9 2023-2026 - LINK: NOT AVAILABLE for model with power legs.



## **MAZDA APPLICATIONS**

MODEL	YEAR	LINK	XL-SEAT ASENTO	SPEEDY LIFT
Mazda 5 *	2006 - 2015			✓

\*Discontinued in USA in 2015, discontinued in Canada in 2017



## Mercedes-Benz MERCEDES APPLICATIONS

MODEL	YEAR	LINK	XL-SEAT ASENTO	SPEEDY LIFT
Metris	2016 - 2023		√ ASENTO	✓



## NISSAN APPLICATIONS

MODEL	YEAR	LINK	XL-SEAT ASENTO	SPEEDY LIFT
Ariya	2022 - 2026	√ DRIVER/PASSENGER <sup>*</sup>	√ ASENTO	

<sup>\*</sup>Ariya 2022-2026 - LINK FRONT PASSENGER: NOT AVAILABLE for models with POWER SEAT.



## **SUBARU APPLICATIONS**

MODEL	YEAR	LINK	XL-SEAT ASENTO	SPEEDY LIFT
Forester	2014 - 2018		√ ASENTO	

<sup>\*</sup>Carnival 2022-2026 - LINK: NOT AVAILABLE in driver position for model with manual seat

<sup>-</sup> LINK CENTER: NOT AVAILABLE if equipped with power seat.

<sup>\*</sup>Carnival 2022-2026 - **SPEEDY-LIFT: NOT AVAILABLE** for 7 passenger model.

<sup>\*</sup>Carnival 2022-2026 - ASENTO: NOT AVAILABLE for model with manual seat.

<sup>\*</sup>Telluride 2020-2025 – **ASENTO: NOT AVAILABLE** for model with manual seat.

<sup>\*</sup>Telluride 2020-2025 - LINK NOT AVAILABLE for model with manual seat.



## **TESLA APPLICATIONS**

MODEL	YEAR	LINK	XL-SEAT ASENTO	SPEEDY LIFT
X	2015 - 2020		√ ASENTO	*√ SPEEDY
X	2021 - 2026		√ ASENTO	*√ SPEEDY

<sup>\*</sup>Tesla X 2015-2026 - SPEEDY-LIFT: NOT AVAILABLE PASSENGER side model with Bench seat.

<sup>\*</sup>Tesla X 2021-2026 - SPEEDY-LIFT: NOT AVAILABLE for model with Bucket Seat.



## **TOYOTA APPLICATIONS**

MODEL	YEAR	LINK	XL-SEAT ASENTO	SPEEDY LIFT
Sienna	2004 - 2010		√ WITH HI-LIFT	✓
Sienna - <b>Power seat</b>	2005 - 2010		√ WITH HI-LIFT	✓
Sienna- 7 & 8 passengers	2011 - 2020	✓ DRIVER/PASSENGER ✓ 2 <sup>nd</sup> ROW*	√ WITH HI-LIFT	✓ *SEE NOTE
Sienna- <b>7 &amp; 8 passengers</b>	2021 - 2026	✓ DRIVER/PASSENGER ✓ 2 <sup>nd</sup> ROW*	✓ ASENTO	✓ *SEE NOTE
Tacoma Access Cab - <b>Suicide door</b>	2005 - 2015	√ PASSENGER	✓	
Tacoma Access Cab - <b>Suicide door</b>	2016 - 2023	√ PASSENGER	✓ ASENTO	
Tacoma Double Cab - <b>4 reg. door</b>	2005 - 2023	√ PASSENGER	✓	
Tundra Double Cab - 4 door (rear doors smaller)	2014 - 2021	√ DRIVER / PASSENGER	✓ ASENTO	
Tundra Crew Max - <b>4 door</b>	2014 - 2021	√ DRIVER / PASSENGER	✓ ASENTO	
Tundra Crew Max – <b>4 door</b>	2022 - 2026	√ DRIVER / PASSENGER		
4 Runner	2003 - 2024		✓	
Rav 4	2006 - 2012		✓	
Rav 4	2013 - 2018	√ PASSENGER	√*	
Rav 4	2019 - 2025	√* PASSENGER	✓ ASENTO	
Venza	2008 - 2016	√* PASSENGER		
Highlander	2014 - 2019	√ PASSENGER	√ ASENTO	
Highlander	2023 - 2026	√ PASSENGER		
Grand Highlander	2023 - 2026	√ PASSENGER		

<sup>\*</sup>Sienna 2011-2020 (8 passenger) - LINK: 2<sup>nd</sup> row - driver side **NOT AVAILABLE** & passenger side only available without footrest.

<sup>\*</sup>Sienna 2021-2026 (8 passenger) - LINK: 2<sup>nd</sup> row - driver side NOT AVAILABLE & passenger side only available without footrest.

<sup>\*</sup>Sienna 2011-2020 (8 passenger) - SPEEDY: Passenger side all mid-row seats will be removed.

<sup>\*</sup>Sienna 2021-2026 (8 passenger) - SPEEDY: Passenger side all mid-row seats will be removed.

<sup>\*</sup>Rav 4 2013-2018 - XL-SEAT: AVAILABLE FOR MANUAL SEATS ONLY

<sup>\*</sup>Rav 4 2019-2025 - LINK: AVAILABLE FOR MANUAL SEATS ONLY

<sup>\*</sup>Venza 2008-2016 - LINK: passenger side AVAILABLE FOR MANUAL SEATS ONLY



## **VOLKSWAGEN APPLICATIONS**

MODEL	YEAR	LINK	XL-SEAT ASENTO	SPEEDY LIFT
Routan	2009 - 2012	✓ DRIVER/PASSENGER ✓ 2 <sup>nd</sup> ROW	√ WITH HI-LIFT	✓
Atlas	2018 - 2026	√*DRIVER/PASSENGER	✓	

<sup>\*</sup>Atlas 2018-2022 – LINK: \* NOT AVAILABLE Front passenger for model manual seat.

# LINK





**WEBSITE RESOURCES** 

Connect to the locked portion of the site.



**HOW IT WORKS VIDEO** 

In just a few minutes, see all of the key features of the product.



**PRODUCT VIDEO** 

Overview of the LINK in motion.



### **HIGHLIGHTS**

- Only uses OEM seat
- All safety features retained
- Great comfort, legroom and space
- Seating behind LINK is not affected
- Customizable movements
- Compatible with 100s of vehicles
- 3 year warranty, 350 lbs capacity



### THINGS TO REMEMBER

- The LINK uses the original seat; however, due to the many trim levels available for a
  given application, it is possible that some of the vehicle's original features will need
  to be cancelled or removed at the time of installation.
- Note that during the install, OEM wire harness is cut and extended under the seat to maintain the OEM security and comfort features. Installation also involves trim and/or shroud modification based on vehicle year, make and model.

## **LINK** | REFERENCES



### **USER DELIVERY VIDEO**

Learn how the pendant and seat adjustments work.



### REDUCED POWER MODE.

If the vehicle battery dies or gets disconnected, the LINK protects itself with a reduced power mode.



### REMOTE DIAGNOSTICS

The LINK is equipped with a remote diagnostic system that can be run over the phone with a technician.



Throughout this tool you will find references to assist you in evaluating the feasibility of a LINK in specific vehicles to meet your client's specific needs. In some applications, the seated position and/or the forward and aft travel of the seat changes with the LINK installed. Below is a visual aid to explain how these details are to be understood.

(OEM = Original Equipment Manufacturer. | Chrysler; GM, Toyota, etc. | from the factory)



### **MANUAL BACK UP VIDEO**

In the unlikely event of an issue, the LINK is equipped with a manual back up.



This information will give an idea of the seat height with the LINK installed. Due to the various seat styles offered by vehicle manufacturers, the information is supplied as a reference to assist you in establishing if the seated height on the LINK will be suitable for your client. *Example:* In the 2015 Ford F-150 Super Cab – the note reads as follows:

"Seat height: ½ inch lower than OEM (non-adjustable manual seat)"

This means that in that model of Ford, with a manual seat (a seat that doesn't offer 'height' adjustment) the LINK will sit half an inch lower than it did before the installation.

(See visual aid - not to scale)



This information is so you can establish the forward and back movements of the seat with the LINK. In all applications, the LINK adds power forward and backward movements, regardless of the seat's original functions. In some applications, the travel is limited. The seat adjustment information will allow you to confirm if the installation of the LINK will be suitable for your client's needs.

OEM seat trave

**FRONT** is to indicate towards the steering wheel or front of the vehicle.

**BACK** is to indicate towards the rear of the vehicle.

VERTICAL TRAVEL



This information is so you can establish the estimated transfer height of the LINK in most vehicles.

As suspensions, tires and wheels can affect the exact height at which a vehicle sits, this method can allow you to evaluate more accurately the transfer height in your specific vehicle.

The LINK has two travel lengths, **SHORT**: for most minivans, SUV's and smaller vehicles; and **LONG**: for trucks and large SUV's. Please confirm the model in question, SHORT or LONG with our sales or service department.

(See visual aid - not to scale)



## **LINK QUICK REFERENCE**

## See next pages for more applications & additional notes

page 1 of 3

CHRYSLER		DRIVER	PASSENGER	2 <sup>nd</sup> ROW
Caravan / Town & Country (*T&C discontinued 2016)	2008 - 2020	<b>√</b> *	✓	✓
Grand Caravan	2021 - 2026	✓	✓	✓
Pacifica	2017 - 2026	✓	✓	<b>√</b> *
√oyager	2020 - 2026	✓	✓	✓
Ram 1500 CLASSIC Crew Cab - <b>4 door</b>	2009 - 2023		✓	
Ram 1500 Crew Cab - <b>4 door</b>	2019 - 2026	<b>√</b> *	<b>√</b> *	
	2009 - 2023	•	<u> </u>	
Ram 1500 CLASSIC Quad Cab - 4 door		<b>√</b> *		
Ram 1500 Quad Cab - <b>4 door</b>	2019 - 2026	<b>√</b> *	<b>✓</b> ✓	
Ram 2500/3500 - <b>4 door</b>	2010 - 2018		<u> </u>	
Ram 2500/3500 - <b>4 door</b>	2019 - 2026	<b>√</b>	<u> </u>	
leep Gladiator	2020 - 2026	•	<b>√</b> *	
eep Grand Cherokee	2011 - 2022	<b>√</b> *	<b>√</b> *	
leep Wrangler – <b>4 door</b>	2018 - 2026	<b>~</b> ^		
ourney	<b>♦</b> 2008 - 2020	DD11/5D	· .	and BOW
FORD		DRIVER	PASSENGER	2 <sup>nd</sup> ROW
F-150 Super Cab - <b>Suicide door</b>	<b>♦</b> 2009 - 2014	<b>✓</b>	<b>√</b> *	
F-150 Super Crew Cab - <b>4 door</b>	◆2009 - 2014	<b>✓</b>	<b>√</b> *	
F-150 Super Cab - <b>Suicide door</b>	2015 - 2020	<b>✓</b>	<u> </u>	
F-150 Super Crew Cab - <b>4 door</b>	2015 - 2020	✓	<u> </u>	
F-150 Super Cab - <b>Suicide door</b>	2021 - 2026	✓	<u> </u>	
F-150 Super Crew Cab - <b>4 door</b>	2021 - 2026	✓	<u> </u>	
Raptor Super Cab - Suicide door	◆2011 - 2016	✓	<b>√</b> *	
Raptor Super Crew Cab - 4 door	◆2011 - 2016	✓	<b>√</b> *	
Raptor Super Cab - Suicide door	2017 - 2026	✓	<u> </u>	
Raptor Super Crew Cab - 4 door	2017 - 2026	✓	✓	
F-250, F-350, F-450 Super Cab - <b>Suicide door</b>	◆2011 - 2016	✓	<u> </u>	
F-250, F-350, F-450 Super Crew Cab - <b>4 door</b>	◆2011 - 2016	✓	<u> </u>	
F-250, F-350, F-450 Super Cab - <b>Suicide door</b>	2017 - 2026	✓	<u> </u>	
F-250, F-350, F-450 Super Crew Cab - <b>4 door</b>	2017 - 2026	· · · · · · · · · · · · · · · · · · ·	<u> </u>	
Ranger Super Crew Cab - <b>4 Door</b>	2019 - 2023		<b>√</b> *	
Explorer	◆2011 - 2015		<b>~</b>	
Explorer	2016 - 2019	<b>√</b> *	<b>√</b> *	
Explorer  Type of this part ( New instance)	2020 - 2026	<b>√</b> *	<b>✓ *</b>	
Expedition / Navigator	◆2007 - 2017	<b>√</b> *	<b>√</b> *	<b>√</b> *
Expedition / Navigator	2018 - 2024	<b>~</b> ^	<b>√</b>	· · ·
Escape	◆2013 - 2019		<b>→</b>	
Escape	2020 - 2026		<b>∨</b>	
Edge	2015 - 2024		<b>∨</b>	
Lincoln MKX	◆2016 - 2021		<b>∨</b>	
Nautilus	2019 - 2023	D.D.U.450	·	and Balli
GENERAL MOTORS (Continued on page 2)		DRIVER	PASSENGER	2 <sup>nd</sup> ROW
Avalanche ★(See note)	<b>♦</b> 2007 - 2013	<b>√</b>	<b>√</b>	
Colorado / Canyon Extended Cab – <b>Suicide door</b>	2015 - 2022	<b>√</b> *	<b>/</b> *	
Colorado / Canyon Crew Cab – <b>4 door</b>	2015 - 2022	<b>√</b> *	<b>√</b>	
Sierra / Silverado Extended Cab -1500- <b>Suicide door★</b>	<b>♦</b> 2007 - 2013	<b>√</b>	<b>√</b>	
Sierra / Silverado Double Cab -1500- <b>4 door</b> (2 smaller)	2014 - 2018	✓	✓	

Due to the age of the application, shipping LEAD TIME of installation kit may vary. Contact us directly for an estimated lead time.

## **LINK QUICK REFERENCE**

◆Due to the age of the application, shipping LEAD TIME of installation kit may vary. Contact us directly for an estimated lead time.

page 2 of 3

GENERAL MOTORS		DRIVER	PASSENGER	2 <sup>nd</sup> ROV
Sierra / Silverado Double Cab -1500- <b>4 door</b> (2 smaller)	2019 - 2026	<b>√</b>	✓	
Sierra / Silverado Crew Cab -1500- <b>4 door★</b> (See note)	<b>♦</b> 2007 - 2013	<b>√</b>	✓	
Sierra / Silverado Crew Cab -1500- <b>4 door</b>	2014 - 2018	<b>√</b>	✓	
Sierra / Silverado Crew Cab -1500- <b>4 door</b>	2019 - 2026	<b>√</b>	✓	
Sierra / Silverado <b>HD</b> -2500 / 3500- <b>Ext. &amp; 4 door★</b>	<b>♦</b> 2007 - 2014	<b>√</b>	✓	
Sierra / Silverado <b>HD</b> -2500 / 3500- <b>4 door</b>	2015 - 2019	<b>√</b>	✓	
Sierra / Silverado <b>HD</b> -2500 / 3500- <b>4 door</b>	2020 - 2026	✓	✓	
Escalade / Suburban / Tahoe / Yukon - <b>All models★</b>	<b>♦</b> 2007 - 2014	<b>√</b>	✓	
Escalade / Suburban / Tahoe / Yukon - <b>All models</b>	2015 - 2020	<b>√</b>	✓	
Escalade / Suburban / Tahoe / Yukon - <b>All models</b>	2021 - 2026	<b>√</b>	✓	
Acadia	<b>♦</b> 2008 - 2016		✓	
Acadia (*See note on Limited)	2017 - 2023	✓	✓	
Blazer	2019 - 2026	√*	√*	
Cadillac XT6	2020 - 2025	✓	✓	
Enclave	<b>♦</b> 2008 - 2017		✓	
Enclave	2018 - 2024	√*	✓	√*
Enclave	2025 - 2026		✓	
Traverse	<b>♦</b> 2008 - 2017		✓	
Traverse	2018 - 2023	<b>√</b> *	✓	<b>√</b> *
Traverse	2024 - 2026		✓	
Terrain / Equinox	<b>♦</b> 2010 - 2017		✓	
Terrain / Equinox	2018 - 2024	<b>√</b> *	<b>√</b> *	
HONDA		DRIVER	PASSENGER	2 <sup>nd</sup> ROV
Odyssey	2018 - 2026	DRIVER	TASSERGER	✓
HYUNDAI	2010 2020	DRIVER	PASSENGER	2 <sup>nd</sup> ROV
Palisade	2020 - 2025	✓*	√*	Z ROV
KIA	2020 - 2023	DRIVER	PASSENGER	2 <sup>nd</sup> ROV
	2022 2026		PASSENGER ✓	∠ KUV √*
Carnival	2022 - 2026	<b>√</b> *	<b>∨</b>	<b>√</b> *
EV9	2023 - 2026	<b>~</b> ^	<b>~</b> ^	
Sedona (See note)	<b>♦</b> 2006 - 2014		<b></b>	<b>√</b> *
Sedona (See note)	2015 - 2021			<b>√</b> *
Telluride	2020 - 2025	√*	<b>√</b> *	
NISSAN		DRIVER	PASSENGER	2 <sup>nd</sup> ROV
Ariya	2022 - 2026	✓	✓	
TOYOTA		DRIVER	PASSENGER	2 <sup>nd</sup> ROV
Sienna	<b>♦</b> 2011 - 2020	✓	✓	<b>√</b> *
Sienna	2021 - 2026	✓	✓	<b>√</b> *
Tacoma Access Cab – <b>Suicide door</b>	2005 - 2023		✓	
Tacoma Double Cab – <b>4 door</b>	2005 - 2023		✓	
Tundra Double Cab – <b>4 door</b> (2 smaller)	2014 - 2021	✓	✓	
Tundra Crew Max – <b>4 door</b>	2014 - 2021	✓	✓	
Tundra Crew Max – <b>4 door</b>	2022 - 2026	<b>√</b> *	<b>√</b> *	
Rav 4	•2013 - 2018		✓	
Rav 4	2019 - 2025		<b>√</b> *	
Venza (See note)	◆2008 - 2016		<b>√</b> *	
Highlander	◆2014 - 2019		✓	
Highlander	2023 - 2026		✓	
	-020 2020		✓	

VOLKSWAGEN		DRIVER	PASSENGER	2 <sup>nd</sup> ROW
Routan	<b>*</b> 2009 - 2012	✓	✓	✓
Atlas	2018 - 2026	✓	<b>√</b> *	

		marked * on the QUICK REFERENCE
Caravan / Town & Country	2008 - 2020	* STEERING COLUMN MUST BE TELESCOPIC.
Pacifica	2017 - 2026	* NOT AVAILABLE for mid-row in PINNACLE MODEL (2021+).
Ram 1500 Quad/ Crew Cab – <b>4 door</b>	2019 - 2026	* NOT AVAILABLE for CLASSIC body style – 2018 model.
Ram 1500 TUNGSTEN	- 2026	* NOT AVAILABLE for TUNGSTEN TRIM LEVEL.
Jeep Wrangler – <b>4 door</b>	2018 - 2026	* NOT AVAILABLE for JK model (2018)
<u> </u>		ONLY AVAILABLE for manual seat
Jeep Gladiator	2020 - 2026	ONLY AVAILABLE for manual seat
Jeep Grand Cherokee	2011 - 2022	* NOT AVAILABLE for model with MANUAL SEAT.
Jeep Grand Cherokee		* NOT AVAILABLE for WL Platform
Journey	2008 - 2020	ONLY AVAILABLE for model with SEAT STORAGE.
F-150 Super Cab - Suicide door / 4 door	2011 - only	* NOT AVAILABLE for model with 4 load cells (see details)
Explorer	2020 - 2026	* NOT AVAILABLE for model with MANUAL SEAT.
Raptor Super Cab - Suicide door / 4 door	2011 - only	* NOT AVAILABLE for model with 4 load cells (see details)
Ford Ranger Super Crew	2019 - 2023	* NOT AVAILABLE for model with Power Seat
Acadia	2017 - 2023	* NOT AVAILABLE for 2017 LIMITED model for the Driver
Ford Expedition (Front)	2018 - 2024	* NOT AVAILABLE for model with MANUAL SEAT.
Ford Expedition/Navigator (2 <sup>nd</sup> Row)	2018 - 2024	ONLY AVAILABLE for Long wheelbase (Exp. MAX & Nav. L)
Navigator (Front)	2018 - 2024	* NOT AVAILABLE for model with PERFECT POSITION SEAT.
Canyon/ Colorado Ext Cab – <b>Suicide door</b>	2015 - 2022	* Rear door MUST BE OPEN for LINK operation.
Canyon/ Colorado Crew Cab – <b>4 door</b>	2015 - 2022	* STEERING COLUMN MUST BE TELESCOPIC.
Blazer	2019 - 2026	* NOT AVAILABLE for ELECTRIC MODEL (BLAZER EV)
Enclave (Driver/Front)	2018 - 2024	* NOT AVAILABLE in driver position for model manual seat
Enclave (2 <sup>nd</sup> ROW)	2018 - 2024	* NOT AVAILABLE for 8 passenger model.
Enclave	2025 - 2026	* NOT AVAILABLE for driver side
Traverse (Driver/Front)	2018 - 2023	* NOT AVAILABLE in driver position for model manual seat
Traverse	2018 - 2023	* NOT AVAILABLE for 8 passenger model.
Traverse	2024 - 2026	* NOT AVAILABLE for driver side
Equinox	2018 - 2024	* NOT AVAILABLE for ELECTRIC MODEL
Kia Carnival	2022 - 2026	* NOT AVAILABLE for model with manual seat (Driver position) * NOT AVAILABLE for 2 <sup>nd</sup> row if equipped with power seat.
Kia EV9	2023 - 2026	* NOT AVAILABLE for model with power legs.
Kia Sedona	<b>♦</b> 2006 - 2014	* NOT AVAILABLE for short wheelbase model.
Kia Sedona	2015 - 2021	* NOT AVAILABLE for mid-row driver side with OEM footrest
Nia Seuoria	2013 - 2021	Discontinued in Canada 2019-2020 model.
Kia Telluride	2020 - 2025	* NOT AVAILABLE for model with MANUAL SEAT.
Hyundai Palisade	2020 - 2025	* NOT AVAILABLE for model with MANUAL SEAT.
Nissan Ariya	2022 - 2026	* NOT AVAILABLE Front passenger for models with POWER SEAT
Toyota Sienna	2011 - 2020	* NOT AVAILABLE for 8-passenger 2 <sup>nd</sup> row on the driver side or for configurations equipped with the OEM footrest.
Toyota Sienna	2021 - 2026	* NOT AVAILABLE for 8-passenger 2 <sup>nd</sup> row on the driver side or for configurations equipped with the OEM footrest.
Toyota Tundra	2022 - 2026	ONLY AVAILABLE for model with POWER SEATS.
Toyota Rav 4	2019 - 2025	ONLY AVAILABLE for model with MANUAL SEATS.
Toyota Venza	<b>♦</b> 2008 - 2016	* NOT AVAILABLE for model with power seats.
Volkswagen Atlas	2018 - 2022	* NOT AVAILABLE Front passenger for model manual seat
ALL MODEL		If equipped with TV/DVD in seatback, UNIT NO LONGER FUNCTIONAL

**★NOT AVAILABLE for 2007 model with integrated seatbelt. 2007 MODEL, INCLUDES:** Avalanche; Sierra / Silverado Extended Cab; Sierra / Silverado Crew Cab; Sierra / Silverado HD (2500/3500) Extended Cab / Silverado HD (2500/3500) Crew Cab; Escalade / Suburban / Tahoe / Yukon.

Tablet part #: **LK1000**Bluetooth part #: **LK1100**LINK footrest part #: **LK14000** 



### 2008-2020♦

### Caravan / Town & Country | DRIVER

### LK-CHRG08L

Seat height: OEM

OEM shrouds must be trimmed.

Outer seat shroud removed and replaced | PROVIDED

Power seat buttons integrated into provided shroud.

⇒ Please specify if equipped with power seats.

Mid-row seat (Stow 'N Go) immediately behind LINK cannot be stowed

### 2008-2020

### Caravan / Town & Country | FRONT PASSENGER

### LK-CHRG08R

Seat height: OFM

OEM shrouds must be trimmed.

Mid-row seat (Stow 'N Go) immediately behind LINK cannot be stowed.

### 2008-2020

LK-CHRG08CL

Seat height: OEM OEM shrouds must be trimmed.

⇒ Please specify if equipped with heated seats. (Add. parts & time)

Caravan / Town & Country | 2<sup>nd</sup> ROW RIGHT (passenger side)

### LK-CHRG08CR Seat height: OEM

OEM shrouds must be trimmed.

⇒ Please specify if equipped with heated seats. (Add. parts & time)

### 2021-2026

LK-CHR17L

Seat height: OEM | Adjustable seat 2.5" travel = sits 1" above lowest point) OEM shrouds must be trimmed.

Grand Caravan | DRIVER

Outer seat trim modified. Inner trim replaced | PARTS PROVIDED

Lower B pillar shroud needs to be cut | STENCIL PROVIDED

Ventilated seat/fan in seat retained. (additional install time)

⇒ Please specify if equipped with power seats. (Add. parts & time) Armrest must be modified | Adapter is included

### \*Transfer height: 19" | Average install: 6-8 hrs.

Seat | FRONT: 2 inches less than OEM | BACK: 2 inches more than OEM

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

Armrest must be modified | Retained. Action required for use.

OEM wire harness must be cut and extended under seat.

**★ STEERING COLUMN MUST BE TELESCOPIC.** 

\*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: OEM | BACK: OEM

OEM wire harness must be cut and extended under seat.

### Caravan / Town & Country | 2nd ROW LEFT (driver side)

\*Transfer height: 19" | Average install: 6-8 hrs.

Seat | FRONT: 5 inches more than OEM | BACK: OEM

★ Must be Stow 'N Go seating (not bench)

Option available: Additional Seat Security Anchor Kit

## \*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: 5 inches more than OEM | BACK: OEM

**★**Must be **Stow** 'N **Go** seating (not bench)

Option available: Additional Seat Security Anchor Kit

### \*Transfer height: 19" | Average install: 10-14 hrs.

Seat | FRONT: 2 1/4" less that OEM | BACK: 2 1/4" more than OEM

Mid-row/Stow 'N Go behind LINK PERMANENTLY in or out of floor.

Seatbelt pre-tensioner relocated.

Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.

OEM wire harness must be cut and extended under seat.

Extensive wire harness work required on fully equipped models. If equipped with TV/DVD in seatback, UNIT NO LONGER FUNCTIONAL

★ Adapt Solutions' signature TALL programing NOT AVAILABLE.

### USER INTERACTION REQUIRED: Watch video for details. Click here for video

### 2021-2026

### Grand Caravan | FRONT PASSENGER

### LK-CHR17R

Seat height: OEM | Adjustable seat 2.5" travel = sits 1" above lowest point) OEM shrouds must be trimmed.

Outer seat trim modified. Inner trim replaced | PARTS PROVIDED Lower B pillar shroud needs to be cut | STENCIL PROVIDED

Ventilated seat/fan in seat retained. (additional install time) ⇒ Please specify if equipped with power seats. (Add. parts & time) \*Transfer height: 19" | Average install: 10-14 hrs.

Seat adjustments | FRONT: 2 ¼" less that OEM | BACK: 2 ¼" more than OEM

Mid-row/Stow 'N Go behind **LINK** PERMANENTLY in or out of floor. Seatbelt pre-tensioner relocated.

Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.

OEM wire harness must be cut and extended under seat.

Extensive wire harness work required on fully equipped models.

If equipped with TV/DVD in seatback, UNIT NO LONGER FUNCTIONAL

#### Grand Caravan | 2nd ROW LEFT OR RIGHT (driver or passenger side) 2021-2026

### LK-CHR17CL or LK-CHR17CR

Seat height: OEM

OEM shrouds must be trimmed.

Doorsill moulding needs to be cut | STENCIL PROVIDED.

Please specify if equipped with heated seats. (Add. parts & time)

\*Transfer height: 19" | Average install: 6-8 hrs. Seat adjustments | FRONT: OEM | BACK: 1 3/4" more than OEM

**★Jump seat in 8 passenger model must be removed.** 



### Pacifica | DRIVER

### LK-CHR17L

Seat height: OEM | Adjustable seat 2.5" travel = sits 1" above lowest point) OEM shrouds must be trimmed.

Outer seat trim modified. Inner trim replaced | PARTS PROVIDED Lower B pillar shroud needs to be cut | STENCIL PROVIDED

Ventilated seat/fan in seat retained. (Additional install time)

⇒ Please specify if equipped with power seats. (Add. parts & time) Armrest must be modified | Adapter is included

If equipped with TV/DVD in seatback, UNIT NO LONGER FUNCTIONAL

\*Transfer height: 19" | Average install: 10-14 hrs. Seat|FRONT: 2 ¼" less that OEM |BACK: 2 ¼" more than OEM

Mid-row/Stow 'N Go behind **LINK** PERMANENTLY in or out of floor.

Seatbelt pre-tensioner relocated. Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.

OEM wire harness must be cut and extended under seat. Extensive wire harness work required on fully equipped models.

Compatible with HYBRID model.

**★**Adapt Solutions' signature TALL programing **NOT AVAILABLE**.

\*Transfer height: 19" | Average install: 10-14 hrs. Seat adjustments | FRONT: 2 1/4" less that OEM | BACK: 2 1/4" more than OEM

Mid-row/Stow 'N Go behind LINK PERMANENTLY in or out of floor.

Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.

USER INTERACTION REQUIRED: Watch video for details. Click here for video

### 2017-2026

### Pacifica | FRONT PASSENGER

### LK-CHR17R

Seat height: OEM | Adjustable seat 2.5" travel = sits 1" above lowest point) OEM shrouds must be trimmed.

Outer seat trim modified. Inner trim replaced | PARTS PROVIDED

Lower B pillar shroud needs to be cut | STENCIL PROVIDED Ventilated seat/fan in seat retained. (Additional install time)

⇒ Please specify if equipped with power seats. (Add. parts & time)

If equipped with TV/DVD in seatback, UNIT NO LONGER FUNCTIONAL

#### Pacifica | 2nd ROW LEFT or passenger side)

### LK-CHR17CL or LK-CHR17CR

Seat height: OEM

OEM shrouds must be trimmed.

Doorsill moulding needs to be cut | STENCIL PROVIDED.

- ⇒ Please specify if equipped with heated seats. (Add. parts & time)
- Please specify if it is hybrid.

\*Transfer height: 19" | Average install: 6-8 hrs. Seat adjustments FRONT: OEM | BACK: 1 34" more than OEM

Extensive wire harness work required on fully equipped models.

**★Jump** seat in 8 passenger model must be removed.

OEM wire harness must be cut and extended under seat.

**★NOT AVAILABLE FOR PINNACLE MODEL (2021 & up).** 

## Voyager | DRIVER

### LK-CHR17L

Seat height: OEM | Adjustable seat 2.5" travel = sits 1" above lowest point) OEM shrouds must be trimmed.

Outer seat trim modified. Inner trim replaced | PARTS PROVIDED

Lower B pillar shroud needs to be cut | STENCIL PROVIDED Ventilated seat/fan in seat retained. (Additional install time)

⇒ Please specify if equipped with power seats. (Add. parts & time)

Armrest must be modified | Adapter is included

\*Transfer height: 19" | Average install: 10-14 hrs. Seat | FRONT: 2 1/4" less that OEM | BACK: 2 1/4" more than OEM

Mid-row/Stow 'N Go behind **LINK** PERMANENTLY in or out of floor.

Seatbelt pre-tensioner relocated.

Seatbelt pre-tensioner relocated.

Compatible with HYBRID model.

Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.

OEM wire harness must be cut and extended under seat.

Extensive wire harness work required on fully equipped models. If equipped with TV/DVD in seatback, UNIT NO LONGER FUNCTIONAL

★ Adapt Solutions' signature TALL programing NOT AVAILABLE.

USER INTERACTION REQUIRED: Watch video for details. Click here for video

### 2020-2026

### Vovager | FRONT PASSENGER

### LK-CHR17R

Seat height: OEM | Adjustable seat 2.5" travel = sits 1" above lowest point) OEM shrouds must be trimmed.

Outer seat trim modified. Inner trim replaced | PARTS PROVIDED Lower B pillar shroud needs to be cut | STENCIL PROVIDED

Ventilated seat/fan in seat retained. (additional install time)

Please specify if equipped with power seats. (Add. parts & time)

\*Transfer height: 19" | Average install: 10-14 hrs.

Seat adjustments | FRONT: 2 ¼" less that OEM | BACK: 2 ¼" more than OEM Mid-row/Stow 'N Go behind LINK PERMANENTLY in or out of floor.

Seatbelt pre-tensioner relocated.

Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.

OEM wire harness must be cut and extended under seat.

Extensive wire harness work required on fully equipped models.

If equipped with TV/DVD in seatback, UNIT NO LONGER FUNCTIONAL

### 2020-2026

### Voyager | 2<sup>nd</sup> ROW LEFT OR RIGHT (driver or passenger side)

### LK-CHR17CL or LK-CHR17CR

Seat height: OEM

OEM shrouds must be trimmed.

Doorsill moulding needs to be cut | STENCIL PROVIDED.

⇒ Please specify if equipped with heated seats. (Add. parts & time)

\*Transfer height: 19" | Average install: 6-8 hrs. Seat adjustments | FRONT: OEM | BACK: 1 3/4" more than OEM

**★Jump** seat in 8 passenger model must be removed.



#### 2009-2023 Ram 1500 Crew Cab CLASSIC -4 door | FRONT PASSENGER

### LK-RAMQ09R

Seat height: OEM

OEM shrouds must be trimmed.

Seat support spring (OEM) must be cut | OEM reconfiguration not affected

Higher trim levels may cause loss of some seat features.

\*Transfer height: 21" | Average install: 6-8 hrs. Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A Lower B pillar shroud needs to be cut | STENCIL PROVIDED. OEM wire harness must be cut and extended under seat.

\*Transfer height: 21" | Average install: 6-8 hrs. Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

OEM wire harness must be cut and extended under seat.

Vented seat base fan removed from seat.

Vented seat base fan removed from seat.

#### Ram 1500 Quad Cab CLASSIC -4 door FRONT PASSENGER

### LK-RAMQ09R

Seat height: OEM

OEM shrouds must be trimmed.

Seat support spring (OEM) must be cut | OEM reconfiguration not affected

Higher trim levels may cause loss of some seat features.

### Ram 1500 Quad Cab -4 door|DRI\

### LK-RAMQ19L

Seat height: 2" higher than OEM lowest (2.5" adjustable seat)

OEM shrouds must be trimmed.

Door must be shimmed | SHIM PROVIDED

Please specify if equipped with power seats.

⇒ Please specify if NEW BODY STYLE or CLASSIC-2018 MODEL

### \*Transfer height: 20" | Average install: 8-10 hrs. Seat adjustments | FRONT: 2"less than OEM | BACK: ½" more than OEM

OEM wire harness must be cut and extended under seat.

★ Adapt Solutions' signature TALL programing NOT AVAILABLE.

OEM wire harness must be cut and extended under seat.

### 2019-2026

### Ram 1500 Quad Cab -4 door | FRONT PASSENGER

LK-RAMQ19R Seat height: 2" higher than OEM lowest (2.5" adjustable seat)

OEM shrouds must be trimmed.

Please specify if equipped with power seats.

⇒ Please specify if NEW BODY STYLE or CLASSIC-2018 MODEL (RAMQ09R)

Seat height: 2" higher than OEM lowest (2.5" adjustable seat)

OEM shrouds must be trimmed.

Door must be shimmed | SHIM PROVIDED

Please specify if equipped with power seats.

\*Transfer height: 20" | Average install: 8-10 hrs.

**★ NOT AVAILABLE** for **CLASSIC** body style – 2018 model.

**★ NOT AVAILABLE** for **TUNGSTEN** TRIM LEVEL

Seat adjustments | FRONT: 2"less than OEM | BACK: 1/2" more than OEM

**★ NOT AVAILABLE** for **TUNGSTEN** TRIM LEVEL

### Ram 1500 Crew Cab -4 door

### LK-RAMQ19L

⇒ Please specify if NEW BODY STYLE or CLASSIC-2018 MODEL

### \*Transfer height: 20" | Average install: 8-10 hrs.

Seat adjustments | FRONT: 2"less than OEM | BACK: ½" more than OEM OEM wire harness must be cut and extended under seat.

★ Adapt Solutions' signature TALL programing NOT AVAILABLE.

**★ NOT AVAILABLE** for **CLASSIC** body style – 2018 model.

**★ NOT AVAILABLE** for **TUNGSTEN** TRIM LEVEL

### 2019-2026

### Ram 1500 Crew Cab -4 door | FRONT PASSENGER

### LK-RAMQ19R

Seat height: 2" higher than OEM lowest (2.5" adjustable seat)

OEM shrouds must be trimmed.

Please specify if equipped with power seats.

⇒ Please specify if NEW BODY STYLE or CLASSIC-2018 MODEL (RAMQ09R)

\*Transfer height: 20" | Average install: 8-10 hrs. Seat adjustments | FRONT: 2"less than OEM | BACK: 1/2" more than OEM

OEM wire harness must be cut and extended under seat.

**★ NOT AVAILABLE** for **TUNGSTEN** TRIM LEVEL

### 2010-2018

### Ram 2500/3500 -4 door | FRONT PASSENGER

### LK-RAMQ09R

Seat height: OEM

OEM shrouds must be trimmed.

Seat support spring (OEM) must be cut | OEM reconfiguration not affected

Higher trim levels may cause loss of some seat features.

◆ Transfer height may vary with tires, wheels and suspension

### Ram 2500/3500 -4 door|FRONT

### 2019-2026 LK-RAMQ09R

Seat height: OEM

OEM shrouds must be trimmed.

Seat support spring (OEM) must be cut | OEM reconfiguration not affected Higher trim levels may cause loss of some seat features.

◆ Transfer height may vary with tires, wheels and suspension.

### ◆\*Transfer height: 23" | Average install: 6-8 hrs.

Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A Lower B pillar shroud needs to be cut | STENCIL PROVIDED. OEM wire harness must be cut and extended under seat.

Vented seat base fan removed from seat

◆\*Transfer height: 23" | Average install: 6-8 hrs. Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

Lower B pillar shroud needs to be cut | STENCIL PROVIDED. OEM wire harness must be cut and extended under seat.

Vented seat base fan removed from seat.





#### 2018-2026 Jeep Wrangler - 4 door | DRIVER

### LK-WRG18L

Seat height: 3/4" higher than OEM lowest (adjustable seat)

OEM seat trim must be modified.

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

★ Adapt Solutions' signature TALL programing NOT AVAILABLE.

ONLY AVAILABLE FOR MANUAL SEAT

★ Not available for JK Model (2018)

### Jeep Wrangler - 4 door | FRONT PASSENGER

### 2018-2026 LK-WRG18R

Seat height: 3/4" higher than OEM lowest (adjustable seat)

OEM seat trim must be modified.

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

★ Adapt Solutions' signature TALL programing NOT AVAILABLE.

ONLY AVAILABLE FOR MANUAL SEAT

★ Not available for JK Model (2018)

### Jeep Gladiator | DRIVER

### 2020-2026 LK-WRG18L

Seat height: 34" higher than OEM lowest (adjustable seat)

OEM seat trim must be modified.

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

★ Adapt Solutions' signature TALL programing NOT AVAILABLE.

ONLY AVAILABLE FOR MANUAL SEAT

#### Jeep Gladiator | FRONT PASSENGER 2020-2026

### LK-WRG18R

Seat height: 3/4" higher than OEM lowest (adjustable seat)

OEM seat trim must be modified.

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

★ Adapt Solutions' signature TALL programing **NOT AVAILABLE**.

ONLY AVAILABLE FOR MANUAL SEAT

#### Jeep Grand Cherokee | FRONT PASSENGER 2011-2022

### LK-GCH11R

Seat height: 1 ½ inches higher than lowest point of adjustable seat (2 ½") OEM shrouds must be trimmed.

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

**★** NOT AVAILABLE FOR MODEL WITH MANUAL SEATS.

#### Journey | FRONT PASSENGER 2008-2020♦

### LK-JOU08R

Seat height: 1/4 inch higher than OEM

OEM shrouds must be trimmed.

Plastic seat pan must be trimmed | OEM reconfiguration not affected

## \*Transfer height: 19" | Average install: 6-8 hrs. Seat adjustments | FRONT: 2" more than OEM | BACK: 3 1/8" less than OEM.

OEM wire harness must be cut and extended under seat.

Friction on center console. Wear and scratches to be expected.

MAX PRESET available. Offers 2 additional inches of vertical travel.

Compatible with HYBRID model.

\*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: 2" more than OEM | BACK: 3 1/8" less than OEM.

OEM wire harness must be cut and extended under seat.

Friction on center console. Wear and scratches to be expected. MAX PRESET available. Offers 2 additional inches of vertical travel.

Compatible with HYBRID model.

## \*Transfer height: 19" | Average install: 6-8 hrs. Seat adjustments | FRONT: 2" more than OEM | BACK: 3 1/8" less than OEM.

OEM wire harness must be cut and extended under seat.

Friction on center console. Wear and scratches to be expected.

MAX PRESET available. Offers 2 additional inches of vertical travel.

\*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: 2" more than OEM | BACK: 3 1/8" less than OEM.

OEM wire harness must be cut and extended under seat.

Friction on center console. Wear and scratches to be expected.

MAX PRESET available. Offers 2 additional inches of vertical travel.

\*Transfer height: 19" | Average install: 6-8hrs.

Seat adjustments | FRONT: 1 3/4 more than OFM | BACK: 1 3/4 more than OFM |

OEM wire harness must be cut and extended under seat.

**★NOT AVAILABLE for WL Platform** 

\*Transfer height: 19" | Average install: 9-11hrs.

Seat adjustments | FRONT: 1/4 more than OEM | BACK: 1/4 more than OEM

OFM wire harness must be cut and extended under seat.

**★**ONLY AVAILABLE FOR MODEL WITH SEAT STORAGE

\*Transfer height: 19" | Average install: 8-10 hrs.

\*Transfer height: 19" | Average install: 8-10 hrs.

\*Transfer height: 19" | Average install: 8-10 hrs. Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

\*Transfer height: 19" | Average install: 8-10 hrs.

\*Transfer height: 19" | Average install: 10-12 hrs.

**★NOT AVAILABLE for 2011 model with 4 load cells. (SEE INSTALL PAGE)** 

\*Transfer height: 19" | Average install: 10-12 hrs.

**★NOT AVAILABLE for 2011 model with 4 load cells. (SEE INSTALL PAGE)** 

\*Transfer height: 21" | Average install: 10-12 hrs. Seat adjustments | FRONT: 3 inches less than OEM | BACK: OEM

⇒ Please specify if equipped with vented seat. (add. parts & time)

**★NOT AVAILABLE for 2011 model with 4 load cells. (SEE INSTALL PAGE)** 

Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

OEM wire harness must be cut and extended under seat.

OEM wire harness must be cut and extended under seat.

Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

OEM wire harness must be cut and extended under seat.

OEM wire harness must be cut and extended under seat.

OEM wire harness must be cut and extended under seat.

Please specify if equipped with power seats.

OFM wire harness must be cut and extended under seat.

Please specify if equipped with power seats. OEM wire harness must be cut and extended under seat.

OFM wire harness must be cut and extended under seat.

Please specify if equipped with power seats.

Please specify if equipped with power seats.

Vented seats retained.



2009-2014 F-150 Super Cab - Suicide door | DRIVER

LK-F150C09L

Seat height: INFO N/A

OEM shrouds must be trimmed.

Installation time varies depending on OEM features integrated in the seat.

Extensive wire harness work required on fully equipped models. (Add time)

OEM wire harness must be cut and extended under seat. ONT PASSENGER F-150 Super Cab – Suicide door|FR

2009-2014♦ LK-F150C09R

Seat height: INFO N/A

OEM shrouds must be trimmed.

Installation time varies depending on OEM features integrated in the seat.

Extensive wire harness work required on fully equipped models. (Add time)

F-150 Super Crew Cab - 4 door

LK-F150C09L Seat height: INFO N/A

OEM shrouds must be trimmed.

Installation time varies depending on OEM features integrated in the seat.

Extensive wire harness work required on fully equipped models. (Add time)

F-150 Super Crew Cab – 4 door | FR ONT PASSENGER

LK-F150C09R Seat height: INFO N/A

OEM shrouds must be trimmed.

Installation time varies depending on OEM features integrated in the seat.

2011-2016

Extensive wire harness work required on fully equipped models. (Add time) **★NOT AVAILABLE for 2011 model with 4 load cells. (SEE INSTALL PAGE)** 

LK-F150C09L

F-150 Raptor Super Cab – Suicide door | DRIVER \*Transfer height: 19" | Average install: 10-12 hrs.

Seat height: INFO N/A

OEM shrouds must be trimmed.

Installation time varies depending on OEM features integrated in the seat.

Extensive wire harness work required on fully equipped models. (Add time)

2011-2016

F-150 Raptor Super Cab – Suicide door|FRONT PASSENGER

LK-F150C09R Seat height: INFO N/A

OEM shrouds must be trimmed.

Installation time varies depending on OEM features integrated in the seat.

Extensive wire harness work required on fully equipped models. (Add time)

2011-2016

F-150 Raptor Super Crew Cab - 4 door | DRIVER \*Transfer height: 19" | Average install: 10-12 hrs.

LK-F150C09L

Seat height: INFO N/A

OEM shrouds must be trimmed.

Installation time varies depending on OEM features integrated in the seat.

Extensive wire harness work required on fully equipped models. (Add time)

-150 Raptor Super Crew Cal

LK-F150C09R

Seat height: INFO N/A

OEM shrouds must be trimmed.

Installation time varies depending on OEM features integrated in the seat.

Extensive wire harness work required on fully equipped models. (Add time)

2017-2026

F-150 Raptor Super Cab - Suicide door | DRIVER

LK-F150C15L

Seat height: ½ inch lower than OEM (non-adjustable manual seat)

OEM shrouds must be trimmed.

Installation time varies depending on OEM features integrated in the seat.

Fully equipped model has large memory box module.

Additional time required for fastening memory box to the floor.

Extensive wire harness work required on fully equipped models. (Add time)

2017-2026

F-150 Raptor Super Cab - Suicide door | FRONT PASSENGER

LK-F150C15R

Seat height: ½ inch lower than OEM (non-adjustable manual seat)

OEM shrouds must be trimmed.

Installation time varies depending on OEM features integrated in the seat.

Fully equipped model has large memory box module.

Additional time required for fastening memory box to the floor. Extensive wire harness work required on fully equipped models. (Add time)

Vented seatback retained.

\*Transfer height: 21" | Average install: 10-12 hrs. Seat adjustments | FRONT: 3 inches less than OEM | BACK: OEM Vented seatback retained.

⇒ Please specify if equipped with power seats.

Please specify if equipped with power seats.

⇒ Please specify if equipped with vented seat. (add. parts & time)

OEM wire harness must be cut and extended under seat.





#### 2017-2026 F-150 Raptor Super Crew Cab – 4 door

### LK-F150C15L

Seat height: ½ inch lower than OEM (non-adjustable manual seat)

OEM shrouds must be trimmed.

Installation time varies depending on OEM features integrated in the seat.

Fully equipped model has large memory box module.

Additional time required for fastening memory box to the floor.

Extensive wire harness work required on fully equipped models. (Add time)

### 4 door | FRONT PASSENGER

### LK-F150C15R

Seat height: ½ inch lower than OEM (non-adjustable manual seat)

OEM shrouds must be trimmed.

Installation time varies depending on OEM features integrated in the seat.

Fully equipped model has large memory box module.

Additional time required for fastening memory box to the floor.

Extensive wire harness work required on fully equipped models. (Add time)

#### 2015-2026 F-150 Super Cab - Suicide door | DRIVER

### LK-F150C15L

Seat height: ½ inch lower than OEM (non-adjustable manual seat)

OEM shrouds must be trimmed. Installation time varies depending on OEM features integrated in the seat.

Fully equipped model has large memory box module.

Additional time required for fastening memory box to the floor.

Extensive wire harness work required on fully equipped models. (Add time)

#### F-150 Super Cab – Suicide door | FRONT PASSENGER

### 2015-2026 LK-F150C15R

Seat height: ½ inch lower than OEM (non-adjustable manual seat)

OEM shrouds must be trimmed.

Installation time varies depending on OEM features integrated in the seat.

Fully equipped model has large memory box module.

Additional time required for fastening memory box to the floor.

Extensive wire harness work required on fully equipped models. (Add time)

### F-150 Super Crew Cab -

### LK-F150C15L

Seat height: ½ inch lower than OEM (non-adjustable manual seat)

OEM shrouds must be trimmed.

Installation time varies depending on OEM features integrated in the seat.

Fully equipped model has large memory box module.

Additional time required for fastening memory box to the floor.

Extensive wire harness work required on fully equipped models. (Add time)

### 2015-2026

### F-150 Super Crew Cab - 4 door FRONT PASSENGER

### LK-F150C15R

Seat height: ½ inch lower than OEM (non-adjustable manual seat) OEM shrouds must be trimmed.

Installation time varies depending on OEM features integrated in the seat. Fully equipped model has large memory box module.

Additional time required for fastening memory box to the floor.

Extensive wire harness work required on fully equipped models. (Add time)

### 2011-2016

### F-450 Super or

### LK-F250C11L

Seat height: 1/4 inch higher than OEM (manual or power seat)

OEM shrouds must be trimmed.

OEM wire harness must be cut and extended under seat.

Extensive wire harness work required on fully equipped models. (Add time)

### 2011-2016

F-250, F-350, F-450 Super or Super

### LK-F250C11R

Seat height: ¼ inch higher than OEM (manual or power seat) OEM shrouds must be trimmed.

OEM wire harness must be cut and extended under seat.

Extensive wire harness work required on fully equipped models. (Add time)

### \*Transfer height: 21" | Average install: 10-12 hrs.

Seat adjustments | FRONT: 3 inches less than OEM | BACK: OEM Vented seatback retained.

- Please specify if equipped with power seats.
- ⇒ Please specify if equipped with vented seat. (Add. parts & time) OEM wire harness must be cut and extended under seat.

### \*Transfer height: 21" | Average install: 10-12 hrs.

Seat adjustments | FRONT: 3 inches less than OEM | BACK: OEM Vented seatback retained.

- Please specify if equipped with power seats.
- ⇒ Please specify if equipped with vented seat. (Add. parts & time) OEM wire harness must be cut and extended under seat.

### \*Transfer height: 20" | Average install: 8-10 hrs.

Seat adjustments | FRONT: 3 inches less than OEM | BACK: OEM Vented seatback retained.

- ⇒ Please specify if equipped with power seats.
- ⇒ Please specify if equipped with vented seat. (Add. parts & time)

OEM wire harness must be cut and extended under seat

\*Transfer height: 20" | Average install: 8-10 hrs. Seat adjustments | FRONT: 3 inches less than OEM | BACK: OEM Vented seatback retained.

- ⇒ Please specify if equipped with power seats.
- ⇒ Please specify if equipped with vented seat. (Add. parts & time) OEM wire harness must be cut and extended under seat.

### \*Transfer height: 20" | Average install: 8-10 hrs.

Seat adjustments | FRONT: 3 inches less than OEM | BACK: OEM Vented seatback retained.

- Please specify if equipped with power seats.
- ⇒ Please specify if equipped with vented seat. (Add. parts & time)
- OEM wire harness must be cut and extended under seat.

\*Transfer height: 20" | Average install: 8-10 hrs.

Seat adjustments | FRONT: 3 inches less than OEM | BACK: OEM Vented seatback retained.

- ⇒ Please specify if equipped with power seats.
- ⇒ Please specify if equipped with vented seat. (Add. parts & time) OEM wire harness must be cut and extended under seat.
- Super Crew Cab Suicide door or 4 door | DRIVER
  - \*Transfer height: 24"(F-250) | Average install: 6-8 hrs. Seat adjustments | FRONT: 2 inches less than OEM | BACK: OEM
  - ⇒ Please specify if equipped with power seats. (Add. parts & time)
  - ⇒ Please specify if equipped with vented seat. (Add. parts & time)

### Crew Cab - Suicide or 4 door | FRONT PASSENGER

\*Transfer height: 24"(F-250) | Average install: 6-8 hrs. Seat adjustments | FRONT: 2 inches less than OEM | BACK: OEM

- ⇒ Please specify if equipped with power seats. (Add. parts & time)
- ⇒ Please specify if equipped with vented seat. (Add. parts & time)





#### F-250, F-350, F-450 Super Crew Cab - Suicide door or 4 door | DRIVER 2017-2026

### LK-F150C15L

Seat height: ½ inch lower than OEM (non-adjustable manual seat)

OEM shrouds must be trimmed.

Installation time varies depending on OEM features integrated in the seat.

Fully equipped model has large memory box module.

Additional time required for fastening memory box to the floor.

Extensive wire harness work required on fully equipped models. (Add time)

#### Cab - Suicide or 4 door | FRONT PASSENGER F-350, F-450 Super Crew

### LK-F150C15R

Seat height: ½ inch lower than OEM (non-adjustable manual seat)

OEM shrouds must be trimmed.

Installation time varies depending on OEM features integrated in the seat.

Fully equipped model has large memory box module.

Additional time required for fastening memory box to the floor.

Extensive wire harness work required on fully equipped models. (Add time)

### Ranger Super Crew Cab | FRONT PASSENGER

### 2019-2023 LK-RNG19R

Seat height: 11/16" higher than OEM lowest (adjustable seat)

OEM seat trim must be modified.

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

★ NOT CURRENTLY AVAILABLE for model with power seats

#### 2011-2015 Explorer | FRONT PASSENGER

### LK-EXL11R

Seat height: INFO N/A

OEM shrouds must be trimmed.

Seat base must be cut | OEM reconfiguration not affected

Higher trim levels may cause loss of some seat features.

Please specify if equipped with vented seat. (add. parts & time)

## Explorer | FRONT PASSENGER

### 2016-2019 LK-EXL16R

Seat height: 1" higher than OEM lowest (adjustable seat)

OEM shrouds must be trimmed.

Seat base must be cut | OEM reconfiguration not affected

OEM wire harness must be cut and extended under seat.

### LK-EXL20L

Seat height: 5/16" higher than OEM lowest (power seat)

OEM shrouds must be trimmed.

OEM wire harness must be cut and extended under seat.

★ Adapt Solutions' signature TALL programing NOT AVAILABLE.

### \*Transfer height: 24" (4X4) | Average install: 8-10 hrs. Seat adjustments | FRONT: 3 inches less than OEM | BACK: OEM Vented seatback retained.

Please specify if equipped with power seats.

⇒ Please specify if equipped with vented seat. (Add. parts & time)

OEM wire harness must be cut and extended under seat.

### Transfer height: 24"(4X4) | Average install: 8-10 hrs.

Seat adjustments | FRONT: 3 inches less than OEM | BACK: OEM Vented seatback retained.

Please specify if equipped with power seats.

⇒ Please specify if equipped with vented seat. (Add. parts & time)

OEM wire harness must be cut and extended under seat.

\*Transfer height: 19" | Average install: 8-10 hrs.

Seat adjustments | FRONT: 2" less than OEM | BACK: 1" less than OEM.

OEM wire harness must be cut and extended under seat.

★ NOT CURRENTLY AVAILABLE for SuperCab model.

\*Transfer height: 19" | Average install: 8-10 hrs.

Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

OEM wire harness must be cut and extended under seat.

★ Adapt Solutions' signature TALL programing NOT AVAILABLE.

## \*Transfer height: 19" | Average install: 9-11 hrs.

Seat adjustments | FRONT: OEM | BACK: 1 ¾" less than OEM Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

Retain fan in seat | Models with ventilated seat.

⇒ Please specify if equipped with vented seat. (add. parts & time)

#### 2020-2026 Explorer | DRIVER

\*Transfer height: 19.5" | Average install: 8-10 hrs. Seat adjustments | FRONT: 3/4" less than OEM | BACK: OEM

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

Control box relocated under the LINK **★ NOT CURRENTLY AVAILABLE** for model with manual seats.

#### 2020-2026 Explorer | FRONT PASSENGER

### LK-EXL20R

Seat height: 5/16" higher than OEM lowest (power seat)

OEM shrouds must be trimmed. OEM wire harness must be cut and extended under seat. \*Transfer height: 19.5" | Average install: 8-10 hrs.

Seat adjustments | FRONT: 3/4" less than OEM | BACK: OEM Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

★ NOT CURRENTLY AVAILABLE for model with manual seats.



#### 2007-2017♦ **Expedition / Navigator | FRONT PASSENGER**

### LK-EXP07R

Seat height: 3/8 inch higher than OEM

OEM shrouds must be trimmed.

Please specify if equipped with vented seats.

Installation time varies depending on OEM features integrated in the seat. Extensive wire harness work required on fully equipped models. (Add time)

#### 2018-2024 Expedition / Navigator | DR

### LK-EXP18L

Seat height: 13/8" higher than OEM lowest (adjustable seat) OEM seat trim must be modified.

⇒ Please specify if equipped with vented seat. (add. parts & time)

**★ NOT AVAILABLE** for model with **MANUAL SEAT**.

**★ NOT AVAILABLE** for model with **PERFECT POSITION SEAT (Navigator)**.

## \*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: 2 ¾ inch less than OEM | BACK:1" more than OEM Vented seats retained.

OEM wire harness must be cut and extended under seat. Fully equipped model has large memory box module. Additional time required for fastening memory box to the floor.

### \*Transfer height: 21" | Average install: 8 -12 hrs.

Seat adjustments | FRONT: 4 1/8" less than OEM | BACK: 11/4" more than OEM Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

OEM wire harness must be cut and extended under seat.

Extensive wire harness work required on fully equipped models.

Additional time required for relocating memory box.

Plastic floor liner in 2<sup>nd</sup> row behind the LINK has to be cut or removed

#### 2018-2024 Expedition / Navigator | FRON

### LK-EXP18R

Seat height: 13/8" higher than OEM lowest (adjustable seat)

OEM seat trim must be modified.

Please specify if equipped with vented seat. (add. parts & time)

**★ NOT AVAILABLE** for model with **MANUAL SEAT**.

**★ NOT AVAILABLE** for model with **PERFECT POSITION SEAT (Navigator)**.

### \*Transfer height: 21" | Average install: 8 -12 hrs.

Seat adjustments | FRONT: 4 1/8" less than OEM | BACK:11/4" more than OEM

Lower B pillar shroud needs to be cut | STENCIL PROVIDED. OEM wire harness must be cut and extended under seat.

Extensive wire harness work required on fully equipped models.

Plastic floor liner in 2<sup>nd</sup> row behind the LINK has to be cut or removed

#### 2018-2024 Expedition / Navigator | 2nd ROW LEFT (DRIVER SIDE)

### LK-EXP18CL

Seat height: OEM

Lower C pillar shroud needs to be cut | STENCIL PROVIDED.

Left & right seat trim replaced | PROVIDED

⇒ Please specify if equipped with heated seat. (add. parts & time)

**★ ONLY AVAILABLE** for **Long wheelbase** (Exp. MAX & Nav. L)

\*Transfer height: 21" | Average install: 6-8 hrs. Seat adjustments | FRONT: 2" less than OEM | BACK: 2.5" more than OEM

OEM wire harness must be cut and extended under seat. Seatback PowerFold feature cancelled | Seat cannot be folded

Seat tilt & slide feature no longer functional Seatback recline no longer adjustable

Model with 2<sup>nd</sup> row center console may require LINK preset modification & decrease legroom during LINK operation Inner arm rest must be removed.

Expedition / Navigator | 2nd ROW RIGHT (PASSENGER SIDE)

### 2018-2024

LK-EXP18CR

Seat height: OEM Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

Left & right seat trim replaced | PROVIDED

Please specify if equipped with heated seat. (add. parts & time)

**★ ONLY AVAILABLE** for **Long wheelbase** (Exp. MAX & Nav. L)

Model with 2<sup>nd</sup> row center console may require LINK preset modification & decrease legroom during LINK operation Inner arm rest must be removed.

\*Transfer height: 21" | Average install: 6-8 hrs.

Seat adjustments | FRONT: 2" less than OEM | BACK: 2.5" more than OEM

OEM wire harness must be cut and extended under seat.

Seatback PowerFold feature cancelled | Seat cannot be folded Seat tilt & slide feature no longer functional

Seatback recline no longer adjustable

#### Escape | FRONT PASSENGER 2013-2019

LK-ESC13R

Seat height: OEM

OEM shrouds must be trimmed

Escape | FRONT PASSENGER

2020-2026

\*Transfer height: 19" | Average install: 6-8 hrs. Seat adjustments | FRONT: ½ inch less than OEM | BACK:1" less than OEM

OEM wire harness must be cut and extended under seat.

LK-ESC20R

Seat height: 25/16" higher than OEM lowest (adjustable seat)

\*Transfer height: 19" | Average install: 6-8 hrs. Seat adjustments | FRONT: OEM | BACK:1" less than OEM

OEM seat trim must be modified.

#### 2020-2024 Edge | FRONT PASSENGER

### LK-EDG15R

Seat height: ¼" higher than OEM lowest (adjustable seat)

OEM shrouds must be trimmed.

⇒ Please specify if equipped with vented seat. (add. parts & time)

⇒ Please specify if 22 position seat. (add. parts, manual & time)

### \*Transfer height: 19" | Average install: 10-12 hrs. Seat adjustments | FRONT: 1/4" more than OEM | BACK: 3/4" less than OEM

OEM wire harness must be cut and extended under seat. Extensive wire harness work required on fully equipped models.

#### SSENGER Lincoln MKX / Nautilus | FRONT PA

### LK-EDG15R

Seat height: 1/4" higher than OEM lowest (adjustable seat) OEM shrouds must be trimmed.

- ⇒ Please specify if equipped with vented seat. (add. parts & time)
- Please specify if 22 position seat. (add. parts, manual & time)

\*Transfer height: 19" | Average install: 10-12 hrs.

Seat adjustments | FRONT: 1/4" more than OEM | BACK: 3/4" less than OEM OEM wire harness must be cut and extended under seat.

Extensive wire harness work required on fully equipped models.



Avalanche DRIVER 2007-2013♦

LK-SILC07L

Seat height: 34" higher than OEM (at lowest point on adjustable seat)

OEM shrouds must be trimmed.

Higher trim levels may cause loss of some seat features.

Vented seat base fan removed from seat.

Avalanche | FRONT PASSENGER 2007-2013

LK-SILC07R

Seat height: ¾" higher than OEM (at lowest point on adjustable seat)

OEM shrouds must be trimmed.

Higher trim levels may cause loss of some seat features.

Vented seat base fan removed from seat.

Canyon / Colorado Extended Cab - Suicide door | DRIVER 2015-2022

LK-COLC15L

Seat height: OEM (adjustable seat = 3" of travel - sits at 1 1/2 inches)

OEM shrouds must be trimmed.

Seat leans towards rear of vehicle once outside. ANGLE: 3 degrees.

Vented seat base fan removed from seat.

Canyon / Colorado Extended Cab - Suicide door | FRONT PASSENGER 2015-2022

LK-COLC15R

Seat height: 3/4" higher than OEM

OEM shrouds must be trimmed.

Seat leans towards rear of vehicle once outside. ANGLE: 3 degrees.

Vented seat base fan removed from seat.

\*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: 2 3/8" less that OEM | BACK: OEM

\*Transfer height: 19" | Average install: 6-8 hrs.

\*Transfer height: 19" | Average install: 6-8 hrs. Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

\*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: 2 3/8" less that OEM | BACK: OEM

OEM wire harness must be cut and extended under seat.

**★NOT AVAILABLE** for 2007 model with seatbelt integrated into the seat

**★NOT AVAILABLE** for 2007 model with seatbelt integrated into the seat

Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

OEM wire harness must be cut and extended under seat.

OEM wire harness must be cut and extended under seat.

OEM wire harness must be cut and extended under seat.

\*Rear door must be open for LINK operation.

\*Rear door must be open for LINK operation.

★ STEERING COLUMN MUST BE TELESCOPIC

4 door | DRIVER 2015-2022 Canyon / Colorado Crew Cab -

LK-COLC15L

Seat height: OEM (adjustable seat = 3" of travel - sits at 1 1/2 inches)

OEM shrouds must be trimmed.

Seat leans towards rear of vehicle once outside. ANGLE: 3 degrees.

Vented seat base fan removed from seat.

\*Transfer height: 19" | Average install: 6-8 hrs. Seat adjustments | FRONT: 2 3/8" less that OEM | BACK: OEM

\*Transfer height: 19" | Average install: 6-8 hrs. Seat adjustments | FRONT: 2 3/8" less that OEM | BACK: OEM

\*Transfer height: 19" | Average install: 6-8 hrs.

OEM wire harness must be cut and extended under seat.

OEM wire harness must be cut and extended under seat.

Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

OEM wire harness must be cut and extended under seat.

**★ STEERING COLUMN MUST BE TELESCOPIC.** 

2015-2022 Canvon / Colorado Crew Cab – 4 door | FRONT PASSENGER

LK-COLC15R

Seat height: 34" higher than OEM

OEM shrouds must be trimmed.

Seat leans towards rear of vehicle once outside. ANGLE: 3 degrees.

Vented seat base fan removed from seat. Sierra / Silverado Extended Cab-1500- Suicide door | DRIVER 2007-201<sub>3</sub>♦

LK-SILX07L

Seat height: ¾" higher than OEM (at lowest point on adjustable seat)

OEM shrouds must be trimmed.

Vented seat base fan removed from seat.

NOTE | If seatbelt is bolted to rocker panel, see required notes below:

Seat belt reel must be relocated | BRACKET PROVIDED

Replace rocker panel shroud | PROVIDED 2007-2013 Sierra / Silverado Extended Cab-1500- Suicide door | FRONT PASSENGER

LK-SILX07R

**Seat height:** 3/4" higher than OEM (at lowest point on adjustable seat)

OEM shrouds must be trimmed.

Vented seat base fan removed from seat. NOTE | If seatbelt is bolted to rocker panel, see required notes below:

Seat belt reel must be relocated | BRACKET PROVIDED

\*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A OEM wire harness must be cut and extended under seat.

**★NOT AVAILABLE** for 2007 model with seatbelt integrated into the seat

**★NOT AVAILABLE** for 2007 model with seatbelt integrated into the seat

Replace rocker panel shroud | PROVIDED

Vented seat base fan removed from seat.

2014-2018 Sierra / Silverado Double Cab-500- 4 door (2 smaller) | DRIVER

LK-SILC14L

Seat height: OEM

OEM shrouds must be trimmed.

Vented seatback retained.

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

If equipped with TV/DVD in seatback, UNIT NO LONGER FUNCTIONAL

Higher trim levels may cause loss of some seat features.

2014-2018

Silverado Double Cab-1500- 4 door (2 smaller) | FRONT PASSENGER

LK-SILC14R

Seat height: OEM

OEM shrouds must be trimmed. Vented seatback retained.

Higher trim levels may cause loss of some seat features.

OEM wire harness must be cut and extended under seat.

\*Transfer height: 20" | Average install: 7-9 hrs.

\*Transfer height: 20" | Average install: 7-9 hrs. Seat adjustments | FRONT: INFO N/A | BACK: OEM (7 inches of travel)

Seat adjustments | FRONT: INFO N/A | BACK: OEM (7 inches of travel)

OEM wire harness must be cut and extended under seat.

Vented seat base fan removed from seat.

If equipped with TV/DVD in seatback, UNIT NO LONGER FUNCTIONAL



2007-2013 Sierra / Silverado Crew Cab-1500- 4 door | DRIVER

LK-SILC07L

Seat height: 3/4" higher than OEM (at lowest point on adjustable seat)

OEM shrouds must be trimmed.

Higher trim levels may cause loss of some seat features.

Vented seat base fan removed from seat

\*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A OEM wire harness must be cut and extended under seat.

**★NOT AVAILABLE** for 2007 model with seatbelt integrated into the seat

Sierra / Silverado Crew Cab-1500- 4 door | FRONT PASSENGER 2007-2013

LK-SILC07R

Seat height: ¾" higher than OEM (at lowest point on adjustable seat)

OEM shrouds must be trimmed.

Higher trim levels may cause loss of some seat features.

Vented seat base fan removed from seat.

\*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A OEM wire harness must be cut and extended under seat.

**★NOT AVAILABLE** for 2007 model with seatbelt integrated into the seat

2014-2018 Sierra / Silverado Crew Cab-1500- 4 door | DRIVER

LK-SILC14L

Seat height: OEM

OEM shrouds must be trimmed. Vented seatback retained.

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

If equipped with TV/DVD in seatback, UNIT NO LONGER FUNCTIONAL

2014-2018 Sierra / Silverado Crew Cab-1500- 4 door | FRONT PASSENGER

LK-SILC14R

Seat height: OEM

OEM shrouds must be trimmed. Vented seatback retained.

Higher trim levels may cause loss of some seat features.

2019-2026 <u> Sierra / Silverado Crew Cab</u>

LK-SILC19L

Seat height: 2 1/4" higher than OEM lowest (3" adjustable seat) OEM shrouds must be trimmed.

⇒ Please specify if 12/16-way seat (power thigh) | additional parts

⇒ Please specify if equipped with seat memory. (add. parts & time)

⇒ Please specify if equipped with vented seat. (add. parts & time)

\*Transfer height: 20" | Average install: 7-9 hrs.

Seat adjustments | FRONT: INFO N/A | BACK: OEM (7 inches of travel)

OEM wire harness must be cut and extended under seat.

Vented seat base fan removed from seat.

Higher trim levels may cause loss of some seat features.

If equipped with TV/DVD in seatback, UNIT NO LONGER FUNCTIONAL Double Cab-1500- 4 door | DRIVER

\*Transfer height: 20" | Average install: 7-9 hrs.

Seat adjustments | FRONT: INFO N/A | BACK: OEM (7 inches of travel)

\*Transfer height: 21" | Average install: 6-8 hrs. Seat adjustments | FRONT: 2 1/4" less than OEM | BACK: 3/4" less than OEM

OEM wire harness must be cut and extended under seat.

OEM wire harness must be cut and extended under seat.

Vented seat base fan removed from seat.

If equipped with TV/DVD in seatback, UNIT NO LONGER FUNCTIONAL

PLEASE NOTE: Sunroof diminishes headroom (Approx. 2 inches)

Sierra / Silverado Crew Cab & Double Cab-1500- 4 door | FRONT PASSENGER

LK-SILC19R

Seat height: 2 1/4" higher than OEM lowest (3" adjustable seat) OEM shrouds must be trimmed.

⇒ Please specify if 12/16-way seat (power thigh) | additional parts supplied.

⇒ Please specify if equipped with vented seat. (add. parts & time)

\*Transfer height: 21" | Average install: 6-8 hrs.

Seat adjustments | FRONT: 2 1/4" less than OEM | BACK: 3/4" less than OEM

OEM wire harness must be cut and extended under seat.

If equipped with TV/DVD in seatback, UNIT NO LONGER FUNCTIONAL

PLEASE NOTE: Sunroof diminishes headroom (Approx. 2 inches)

2007-2014 Sierra / Silverado HD -2500 / 3500- Extended Cab - Suicide door | DRIVER

LK-SILX07L

Seat height: ¾" higher than OEM (at lowest point on adjustable seat)

OEM shrouds must be trimmed. Vented seat base fan removed from seat

NOTE | If seatbelt is bolted to rocker panel, see required notes below:

Seat belt reel must be relocated | BRACKET PROVIDED

\*Transfer height: 23" | Average install: 6-8 hrs.

Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

OEM wire harness must be cut and extended under seat.

**★NOT AVAILABLE** for 2007 model with seatbelt integrated into the seat

Replace rocker panel shroud | PROVIDED

Sierra / Silverado HD -2500 / Extended Cab – Suicide door | FRONT PASSENGER <u>2007-2</u>014

LK-SILX07R

Seat height: ¾" higher than OEM (at lowest point on adjustable seat) OEM shrouds must be trimmed.

Vented seat base fan removed from seat.

NOTE | If seatbelt is bolted to rocker panel, see required notes below:

Seat belt reel must be relocated | BRACKET PROVIDED

\*Transfer height: 23" | Average install: 6-8 hrs. Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

\*Transfer height: 23" | Average install: 6-8 hrs.

OEM wire harness must be cut and extended under seat.

**★NOT AVAILABLE** for 2007 model with seatbelt integrated into the seat

Replace rocker panel shroud | PROVIDED

Vented seat base fan removed from seat.

Sierra / Silverado HD -2500 / 3500- Crew Cab - 4 door | DRIVER 2007-2014

LK-SILC07L

Seat height: ¾" higher than OEM (at lowest point on adjustable seat) OEM shrouds must be trimmed.

Higher trim levels may cause loss of some seat features.

2007-2014 Sierra / Silverado HD -2500 / 3500-

LK-SILC07R

Seat height: 34" higher than OEM (at lowest point on adjustable seat)

OEM shrouds must be trimmed. Higher trim levels may cause loss of some seat features.

Crew Cab - 4 door | FRONT PASSENGER \*Transfer height: 23" | Average install: 6-8 hrs.

OEM wire harness must be cut and extended under seat.

Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

OEM wire harness must be cut and extended under seat.

Vented seat base fan removed from seat.

\*ESTIMATED height and installation time in base model. Install times as reference only and apply to seasoned installers. THE FIRST INSTALLATIONS will likely take a few additional hours. Please schedule accordingly.



### 2015-2019

### Sierra / Silverado HD -2500 / 3500- Double or Crew Cab | DRIVER

### LK-SILC14L

Seat height: OEM

OEM shrouds must be trimmed. Vented seatback retained.

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

♦2500 model sits one inch higher that the 1500 & 3500 model.

◆\*Transfer height: 20"-21" | Average install: 7-9 hrs.

Seat adjustments | FRONT: INFO N/A | BACK: OEM (7 inches of travel)

OEM wire harness must be cut and extended under seat.

Vented seat base fan removed from seat.

Higher trim levels may cause loss of some seat features.

If equipped with TV/DVD in seatback, UNIT NO LONGER FUNCTIONAL

### 2015-2019

### / 3500- Double or Crew Cab | FRONT PASSENGER

### LK-SILC14R

Seat height: OEM

OEM shrouds must be trimmed. Vented seatback retained.

Higher trim levels may cause loss of some seat features.

If equipped with TV/DVD in seatback, UNIT NO LONGER FUNCTIONAL

### ◆\*Transfer height: 20"-21" | Average install: 7-9 hrs. Seat adjustments | FRONT: INFO N/A | BACK: OEM (7 inches of travel)

◆\*Transfer height: 25" | Average install: 6-8 hrs.
Seat adjustments | FRONT: 2 ¼" less than OEM | BACK: ¾" less than OEM

If equipped with TV/DVD in seatback, UNIT NO LONGER FUNCTIONAL

PLEASE NOTE: Sunroof diminishes headroom (Approx. 2 inches)

◆\*Transfer height: 25" | Average install: 6-8 hrs. Seat adjustments | FRONT: 2 1/4" less than OEM | BACK: 3/4" less than OEM

◆ Transfer height may vary with tires, wheels and suspension.

OEM wire harness must be cut and extended under seat.

Vented seat base fan removed from seat.

♦2500 model sits one inch higher that the 1500 & 3500 model.

OEM wire harness must be cut and extended under seat.

### Sierra / Silverado HD -2500 / 3500- Double or Crew Cab | DRIVER

### LK-SILC19L

Seat height: 2 1/4" higher than OEM lowest (3" adjustable seat) OEM shrouds must be trimmed.

- ⇒ Please specify if 12/16-way seat (power thigh) | additional parts
- ⇒ Please specify if equipped with seat memory. (Add. parts & time)
- ⇒ Please specify if equipped with vented seat. (Add. parts & time)

### Sierra / Silverado HD -2500 / 3500- Double or Crew Cab | FRONT PASSENGER

### LK-SILC19R

### Seat height: 2 1/4" higher than OEM lowest (3" adjustable seat)

OEM shrouds must be trimmed.

⇒ Please specify if 12/16-way seat (power thigh) | additional parts

⇒ Please specify if equipped with vented seat. (Add. parts & time)

PLEASE NOTE: Sunroof diminishes headroom (Approx. 2 inches)

### OEM wire harness must be cut and extended under seat. If equipped with TV/DVD in seatback, UNIT NO LONGER FUNCTIONAL

♦ Transfer height may vary with tires, wheels & suspension.

### 2007-2014

#### Escalade / Suburban / Tahoe ukon - All models | DRIVER

### LK-SILC07L

Seat height: ¾" higher than OEM (at lowest point on adjustable seat) OEM shrouds must be trimmed.

Higher trim levels may cause loss of some seat features.

Vented seat base fan removed from seat

### ◆\*Transfer height:19" or 23" | Average install: 6-8 hrs. Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

OEM wire harness must be cut and extended under seat.

**★NOT AVAILABLE** for 2007 model with seatbelt integrated into the seat

♦HD models sit 4 inches higher. Estimated transfer height 23 inches from the ground.

### 2007-2014 LK-SILC07R

Seat height: ¾" higher than OEM (at lowest point on adjustable seat) OEM shrouds must be trimmed.

Escalade /

Higher trim levels may cause loss of some seat features.

Vented seat base fan removed from seat.

### Suburban / Tahoe / Yukon - All models | FRONT PASSENGER ◆\*Transfer height:19" or 23" | Average install: 6-8 hrs. Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

OEM wire harness must be cut and extended under seat.

OEM wire harness must be cut and extended under seat.

Higher trim levels may cause loss of some seat features.

**★NOT AVAILABLE** for 2007 model with seatbelt integrated into the seat

♦HD models sit 4 inches higher. Estimated transfer height 23 inches from the ground.

Seat adjustments | FRONT: INFO N/A | BACK: OEM (7 inches of travel)

### 2015-2020

### <u> Escalade / Suburban / Tahoe / Yukon - All models | DRIVER</u> \*Transfer height: 20" | Average install: 7-9 hrs.

### LK-SILC14L

Seat height: OEM

OEM shrouds must be trimmed.

Vented seatback retained.

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

If equipped with TV/DVD in seatback, UNIT NO LONGER FUNCTIONAL

### 2015-2020

### LK-SILC14R

Seat height: OEM

OEM shrouds must be trimmed.

Vented seatback retained.

Higher trim levels may cause loss of some seat features.

## Escalade / Suburban / Tahoe / Yukon - All models | FRONT PASSENGER

\*Transfer height: 20" | Average install: 7-9 hrs.

Seat adjustments | FRONT: INFO N/A | BACK: OEM (7 inches of travel)

OEM wire harness must be cut and extended under seat.

Vented seat base fan removed from seat.

Vented seat base fan removed from seat.

If equipped with TV/DVD in seatback, UNIT NO LONGER FUNCTIONAL

#### 2021-2026 Escalade / Suburban Yukon - All models | DRIVER

### LK-SILC19L

Seat height: 2 ¼" higher than OEM lowest (3" adjustable seat)

OEM shrouds must be trimmed.

Higher trim levels may cause loss of some seat features.

⇒ Please specify if 12/16-way seat (power thigh) | additional parts supplied. Extensive wire harness work required on fully equipped models. (Add time)

\*Transfer height: 21" | Average install: 6-8 hrs. Seat adjustments | FRONT: 2 ½" less than OEM | BACK: ¾" less than OEM

OEM wire harness must be cut and extended under seat.

⇒ Please specify if equipped with seat memory. (add. parts & time)

⇒ Please specify if equipped with vented seat. (add. parts & time) If equipped with TV/DVD in seatback, UNIT NO LONGER FUNCTIONAL

PLEASE NOTE: Sunroof diminishes headroom (Approx. 2 inches)



| FRONT PASSENGER

#### Escalade / Suburban / Tahoe / Yukon - All models | FRONT PASSENGER 2021- 2026

LK-SILC19R

Seat height: 2 1/4" higher than OEM lowest (3" adjustable seat)

OEM shrouds must be trimmed.

Higher trim levels may cause loss of some seat features.

⇒ Please specify if 12/16-way seat (power thigh) | additional parts supplied. Extensive wire harness work required on fully equipped models. (Add time)

2008-2016

Acadia | FRONT PASSENGER

LK-TRV08R

Seat height: INFO N/A

OEM shrouds must be trimmed.

Vehicle battery access available | Installation does not block access.

GMC Acadia Limited 2017 (Built on 2016 body style)

Acadia / 2020-2022

LK-ACA17L

Seat height: 2 1/2" higher than OEM lowest (3" adjustable seat) OEM shrouds must be trimmed.

Lower B pillar shroud must be cut | STENCIL PROVIDED

Please specify if POWER SEAT.

★ Adapt Solutions' signature TALL programing NOT AVAILABLE.

Door must be shimmed | SHIM PROVIDED

**★ NOT AVAILABLE for 2017 ACADIA LIMITED MODEL** 

2017-2025 Acadia / 2020-2022

LK-ACA17R Seat height: 2 1/2" higher than OEM lowest (3" adjustable seat)

2017 GMC Acadia Limited model use 2016 Acadia KIT

**★** Adapt Solutions' signature TALL programing **NOT AVAILABLE**.

Please specify if POWER SEAT.

2017-2025

Cadillac XT6

LK-ACA17L

Seat height: 2 1/2" higher than OEM lowest (3" adjustable seat)

OEM shrouds must be trimmed. Lower B pillar shroud must be cut | STENCIL PROVIDED

Please specify if POWER SEAT.

★ Adapt Solutions' signature TALL programing NOT AVAILABLE. Door must be shimmed | SHIM PROVIDED

**★ NOT AVAILABLE for 2017 ACADIA LIMITED MODEL** 

Cadillac XT6/ 2020-2022 FRONT PASSENGER

2017-2025

LK-ACA17R Seat height: 2 1/2" higher than OEM lowest (3" adjustable seat)

2017 GMC Acadia Limited model use 2016 Acadia KIT

**★** Adapt Solutions' signature TALL programing **NOT AVAILABLE**.

Please specify if POWER SEAT.

2019-2026 Blazer | DRIVER

LK-BLZ19L

Seat height: 2 1/2" higher than OEM lowest (3" adjustable seat)

OEM shrouds must be trimmed.

Lower B pillar shroud must be cut | STENCIL PROVIDED

⇒ Please specify if POWER SEAT.

★ Adapt Solutions' signature TALL programing NOT AVAILABLE.

Door must be shimmed | SHIM PROVIDED

**★ NOT AVAILABLE for ELECTRIC MODEL (BLAZER EV)** 

2019-2026

Blazer | FRONT PASSENGER

LK-BLZ19R

Seat height: 2 1/2" higher than OEM lowest (3" adjustable seat) OEM shrouds must be trimmed.

⇒ Please specify if POWER SEAT.

★ Adapt Solutions' signature TALL programing NOT AVAILABLE.

**★ NOT AVAILABLE for ELECTRIC MODEL (BLAZER EV)** 

\*Transfer height: 21" | Average install: 6-8 hrs. Seat adjustments | FRONT: 2 1/4" less than OEM | BACK: 3/4" less than OEM

OEM wire harness must be cut and extended under seat.

⇒ Please specify if equipped with vented seat. (add. parts & time) If equipped with TV/DVD in seatback, UNIT NO LONGER FUNCTIONAL

PLEASE NOTE: Sunroof diminishes headroom (Approx. 2 inches)

\*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

OEM wire harness must be cut and extended under seat.

Seat support spring (OEM) must be cut | OEM reconfiguration not affected

\*Transfer height: 19" | Average install: 6-8 hrs. Seat adjustments | FRONT: ¾" less than OEM | BACK: 1" less than OEM

Vented seat base fan removed from seat.

OEM wire harness must be cut and extended under seat.

Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.

Seat offset 1" to the left of the steering.

If equipped with manual seats, recline handle is replaced | PROVIDED

\*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: 3/4" less than OEM | BACK: 1" less than OEM OEM wire harness must be cut and extended under seat.

Vented seat base fan removed from seat.

Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.

\*Transfer height: 19" | Average install: 6-8 hrs. Seat adjustments | FRONT: ¾" less than OEM | BACK: 1" less than OEM

Vented seat base fan removed from seat.

OEM wire harness must be cut and extended under seat.

Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.

Seat offset 1" to the left of the steering.

If equipped with manual seats, recline handle is replaced | PROVIDED

\*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: 3/4" less than OEM | BACK: 1" less than OEM

OEM wire harness must be cut and extended under seat. Vented seat base fan removed from seat.

Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.

\*Transfer height: 19" | Average install: 6-8 hrs. Seat adjustments | FRONT: ¾" less than OEM | BACK: 1" less than OEM

⇒ Please specify if equipped with vented seat. (Add. parts & time) OEM wire harness must be cut and extended under seat.

Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.

Seat offset 1" to the left of the steering.

If equipped with manual seats, recline handle is replaced | PROVIDED

\*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: 3/4" less than OEM | BACK: 1" less than OEM

⇒ Please specify if equipped with vented seat. (Add. parts & time)

OEM wire harness must be cut and extended under seat. Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.



2008-2017 ◆ Enclave   FRONT PASSENGER	
LK-TRV08R	*Transfer height: 19"   Average install: 6-8 hrs.
Seat height: INFO N/A	Seat adjustments   FRONT: INFO N/A   BACK: INFO N/A
OEM shrouds must be trimmed.  Vehicle battery access available   Installation does not block access.	OEM wire harness must be cut and extended under seat.  Seat support spring (OEM) must be cut   OEM reconfiguration not affected
2018-2024 Enclave   DRIVER	
LK-TRV18L	*Transfer height: 19"   Average install: 10-14 hrs.
Seat height: 3" higher than OEM lowest (3" adjustable seat)	Seat adjustments   FRONT: 11/4" less than OEM   BACK: 1/2" more than OEM
OEM shrouds must be trimmed.	OEM wire harness must be cut and extended under seat.
Lower B pillar shroud needs to be cut   STENCIL PROVIDED.  Please specify if equipped with vented seat. (Add. parts & time)	Adapt Solutions' signature TALL programing NOT AVAILABLE.  * ONLY AVAILABLE for model with POWER SEATS.
2018-2024 Enclave   FRONT PASSENGER	NILY AVAILABLE TOI Model With POWER SEATS.
	*Transfer height 10"   Average install 10 14 hrs
LK-TRV18R Seat height: 3" higher than OEM lowest (3" adjustable seat)	*Transfer height: 19"   Average install: 10-14 hrs.  Seat adjustments   FRONT: 1¼"   less than OEM   BACK: ½" more than OEM
OEM shrouds must be trimmed.	OEM wire harness must be cut and extended under seat.
⇒ Please specify if equipped with vented seat. (Add. parts & time)	Adapt Solutions' signature TALL programing NOT AVAILABLE.
2025-2026 Enclave   FRONT PASSENGER	
LK-TRV24R	*Transfer height: 20"   Average install: 8-10 hrs.
Seat height: 2 3/16" higher than OEM lowest	Seat adjustments   FRONT: 1" less than OEM   BACK: 1 ½" more than OEM
OEM shrouds must be trimmed.	OEM wire harness must be cut and extended under seat.
2008-2017♦ Traverse   FRONT PASSENGER	*T(
LK-TRV08R	*Transfer height: 19"   Average install: 6-8 hrs.
Seat height: INFO N/A OEM shrouds must be trimmed.	Seat adjustments   FRONT: INFO N/A   BACK: INFO N/A  OEM wire harness must be cut and extended under seat.
Vehicle battery access available   Installation does not block access.	Seat support spring (OEM) must be cut   OEM reconfiguration not affected
2018-2023 Traverse   DRIVER	
LK-TRV18L	*Transfer height: 19"   Average install: 10-14 hrs.
Seat height: 3" higher than OEM lowest (3" adjustable seat)	Seat adjustments   FRONT: 11/4" less than OEM   BACK: 1/2" more than OEM
OEM shrouds must be trimmed.	OEM wire harness must be cut and extended under seat.
Lower B pillar shroud needs to be cut   STENCIL PROVIDED.  Please specify if equipped with vented seat. (add. parts & time)	Adapt Solutions' signature TALL programing NOT AVAILABLE.  * ONLY AVAILABLE for model with POWER SEATS.
2018-2023 Traverse FRONT PASSENGER	
LK-TRV18R	*Transfer height: 19"   Average install: 10-14 hrs.
Seat height: 3" higher than OEM lowest (3" adjustable seat)	Seat adjustments   FRONT: 11/4" less than OEM   BACK: 1/2" more than OEM
OEM shrouds must be trimmed.	OEM wire harness must be cut and extended under seat.
→ Please specify if equipped with vented seat. (add. parts & time)	Adapt Solutions' signature TALL programing <b>NOT AVAILABLE</b> .
2024-2026 Traverse   FRONT PASSENGER	
LK-TRV24R	*Transfer height: 20"   Average install: 8-10 hrs.
Seat height: 2 3/16" higher than OEM lowest OEM shrouds must be trimmed.	Seat adjustments   FRONT: 1" less than OEM   BACK: 1 ½" more than OEM OEM wire harness must be cut and extended under seat.
2018-2024 Enclave   2nd ROW LEFT (driver s	
LK-TRV18CL	*Transfer height: 19"   Average install: 4-6 hrs.
Seat height: OEM	Seat adjustments   FRONT: 2 ½" more than OEM   BACK: 1" more than OEM
★NOT AVAILABLE for 8 passenger model.	Seatback recline no longer adjustable   Remains completely upright.
⇒ Please specify if equipped with heated seat. (add. parts & time)	Seatback flat folding feature cancelled   Cannot be folded.
2018-2023 Traverse   2nd ROW LEFT (driver	side)
LK-TRV18CL	*Transfer height: 19"   Average install: 4-6 hrs.
Seat height: OEM	Seat adjustments   FRONT: 2 1/2" more than OEM   BACK: 1" more than OEM
*NOT AVAILABLE for 8 passenger model.	Seatback recline no longer adjustable   Remains completely upright.
Please specify if equipped with heated seat. (add. parts & time)      Produced 2nd DOW DICHT (passes)	Seatback flat folding feature cancelled   Cannot be folded.
2018-2024 Enclave   2nd ROW RIGHT (passe	_ <del>`</del>
LK-TRV18CR	*Transfer height: 19"   Average install: 4-6 hrs.
Seat height: OEM Seatback recline no longer adjustable   Remains completely upright.	Seat adjustments   FRONT: 2 ½" more than OEM   BACK: 1" more than OEM 'Smart Slide®' quick access to 3rd row feature no longer functional.
Seatback flat folding feature cancelled   Cannot be folded.	★NOT AVAILABLE for 8 passenger model.
⇒ Please specify if equipped with heated seat. (add. parts & time)	
2018-2023 Traverse   2nd ROW RIGHT (passe	enger side)
LK-TRV18CR	*Transfer height: 19"   Average install: 4-6 hrs.

**★NOT AVAILABLE for 8 passenger model.** 

Seatback recline no longer adjustable | Remains completely upright.

⇒ Please specify if equipped with heated seat. (add. parts & time)

Seatback flat folding feature cancelled | Cannot be folded.

<sup>\*</sup>ESTIMATED height and installation time in base model. Install times as reference only and apply to seasoned installers.



LINK PAGE 14 OF 19

### 2010-2017

### Terrain / Equinox | FRONT PASSENGE

### LK-TER10R

Seat height: OEM

OEM shrouds must be trimmed.

Outer seat shroud removed and replaced | PROVIDED.

**★** Adapt Solutions' signature TALL programing **NOT AVAILABLE**.

### 2018-2024

### Terrain / Equinox | DRIVER

### LK-TER18L

Seat height: 2 1/4" higher than OEM lowest (3" adjustable seat)

OEM shrouds must be trimmed.

Lower B pillar shroud must be cut.

\*Transfer height: 19" | Average install: 5-7 hrs. Seat adjustments | FRONT: OEM | BACK: 1" less than OEM

OEM wire harness must be cut and extended under seat.

Seat recline handle removed and replaced | PROVIDED.

### \*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: OEM | BACK: 1/2" less than OEM

OEM wire harness must be cut and extended under seat.

Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.

NOT AVAILABLE FOR EV MODEL

### 2018-2024

### Terrain / Equinox | FRONT PASSENGER

### LK-TER18R

Seat height: 2" higher than OEM lowest (3" adjustable seat)

OEM shrouds must be trimmed.

★ Adapt Solutions' signature TALL programing NOT AVAILABLE.

⇒ Please specify if POWER SEAT.

### \*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: 1/2" more than OEM | BACK: 1" less than OEM

OEM wire harness must be cut and extended under seat.

Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees. NOT AVAILABLE FOR EV MODEL

⇒ Please specify if equipped with vented seat. (add. parts & time)



### 2018-2026

### Odyssey | 2nd ROW LEFT (driver side)

### LK-HDA18CL

Seat height: 1 inch higher than OEM

Jump seat in 8 passenger model is retained

\*Transfer height: 19" | Average install: 4-6 hrs. Seat adjustments | FRONT: 2 1/4 more than OEM | BACK: 3/4 more than OEM

Please specify if 7 or 8 passengers.

Option Available: Adapt Solutions 100 pounds capacity Seat Anchor kit

CAUTION: Window of mid-row door must always be closed for LINK Operation. If open, door will not fully open. DANGER OF VEHICLE DAMAGE

#### 2018-2026 Odyssey | 2<sup>nd</sup> ROW RIGHT (passenger signal)

### LK-HDA18CR

Seat height: 1 inch higher than OEM

Jump seat in 8 passenger model is retained.

\*Transfer height: 19"

Seat adjustments FRONT: 2 1/4 more than OEM BACK: 3/4 more than OEM

Please specify if 7 or 8 passengers.

Option Available: Adapt Solutions 100 pounds capacity Seat Anchor kit

CAUTION: Window of mid-row door must always be closed for LINK Operation. If open, door will not fully open. DANGER OF VEHICLE DAMAGE



### 2020-2025

### Palisade | **DRIVER**

### LK-PAL20L

Seat height: 1 3/4" lower than OEM highest | 3/8" higher than OEM lowest

OEM shrouds must be trimmed | STENCIL PROVIDED

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

Door must be shimmed | SHIM PROVIDED

If your seat is equipped with extendable thigh support, feature is cancelled

2020-2025

### Palisade | FRONT PASSENGER

### LK-PAL20R

Seat height: 2 1/8" lower than OEM highest | 3/8" higher than OEM lowest OEM shrouds must be trimmed | STENCIL PROVIDED

Door must be shimmed | SHIM PROVIDED

If your seat is equipped with ventilation, feature is cancelled

\*Transfer height: 19" | Average install: 10-12 hrs.

Seat adjustments | FRONT: 1 3/4" less than OEM | BACK: 1 3/4" more than OEM

OEM wire harness must be cut and extended under seat.

If your seat is equipped with ventilation, feature is cancelled

Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees

**★ NOT AVAILABLE FOR MODELS WITH MANUAL SEAT** 

### \*Transfer height: 19" | Average install: 10-12 hrs.

Seat adjustments | FRONT: 1 3/4" less than OEM | BACK: 1 3/4" more than OEM OEM wire harness must be cut and extended under seat.

Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees

NOT AVAILABLE FOR MODELS WITH MANUAL SEAT

#### 2022-2026 Ariva | DRIVER

### LK-ARY22L

Seat height: 2 1/8" lower than OEM highest | 7/8" higher than OEM lowest

OEM shrouds must be trimmed | STENCIL PROVIDED

Lower B pillar shroud needs to be cut | STENCIL PROVIDED. Door must be shimmed | SHIM PROVIDED

\*Transfer height: 19" | Average install: 10-12 hrs. Seat adjustments | FRONT: 2" less than OEM | BACK: 3 1/4" more than OEM

OEM wire harness must be cut and extended under seat.

Seat leans towards rear of vehicle once outside. ANGLE: 4.5 degrees Fabric flap behind the seat has to be cut & modified

★ Adapt Solutions' signature TALL programing NOT AVAILABLE.

#### 2022-2026 Ariya | FRONT PASSENGER

### LK-ARY22R

Seat height: 2 1/8" lower than OEM highest | 7/8" higher than OEM lowest OEM shrouds must be trimmed | STENCIL PROVIDED

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

⇒ Please specify if POWER SEAT

### \*Transfer height: 19" | Average install: 10-12 hrs.

Seat adjustments | FRONT: 2 3/4" less than OEM | BACK: 4" more than OEM Door must be shimmed | SHIM PROVIDED

Fabric flap behind the seat has to be cut & modified OEM wire harness must be cut and extended under seat.



2023-2026 EV9 DRIVER LK-EV924L

Seat height: 1 3/8" lower than OEM highest | 1" higher than OEM lowest OEM shrouds must be trimmed | STENCIL PROVIDED Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

**★ NOT AVAILABLE FOR MODELS WITH OEM POWER LEGS** 

2023-2026 **EV9** FRONT PASSENGE

LK-EV924R

Seat height: 1 7/8" lower than OEM highest | 1" higher than OEM lowest OEM shrouds must be trimmed | STENCIL PROVIDED

**★ NOT AVAILABLE FOR MODELS WITH OEM POWER LEGS** Vented seat base fan removed from seat.

2006-2014

LK-KIA06CL

Seat height: 1/2 inch higher than OEM OEM shrouds must be trimmed

2006-2014

LK-KIA06CR

Seat height: ½ inch higher than OEM OEM shrouds must be trimmed

2015-2021 Sedona | FRONT PASSENGER

LK-KIA16R

Seat height: OEM (adjustable seat = 3" of travel - sits 1" higher than lowest) OEM shrouds must be trimmed.

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

⇒ Please specify if POWER SEATS | additional parts supplied.

Sedona | 2<sup>nd</sup> ROW LEFT (driver side) 2015-2021

Seat height: OEM

OEM shrouds must be trimmed.

**★NOT AVAILABLE FOR MODELS WITH OEM FOOTREST** | Discontinued in Canada 2019-2020 model.

2015-2021

LK-KIA16CR

Seat height: OEM

LK-KIA22L

Seat height: 1 34" lower than OEM highest | 1 14" higher than OEM lowest

OEM seat trim must be modified | STENCIL PROVIDED

**★** NOT AVAILABLE FOR MODELS WITH MANUAL SEAT.

\*Transfer height: 19" | Average install: 8-10 hrs.

Seat adjustments | FRONT: 2" less than OEM | BACK: 3" more than OEM

OEM wire harness must be cut and extended under seat.

Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees

Fabric flap behind the seat has to be cut & modified

\*Transfer height: 19" | Average install: 8-10 hrs.

Seat adjustments | FRONT: 2" less than OEM | BACK: 3" more than OEM OEM wire harness must be cut and extended under seat.

Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees

Fabric flap behind the seat has to be cut & modified

Sedona | 2<sup>nd</sup> ROW LEFT (driver side) ◆◆not available for SHORT WHEELBASE

\*Transfer height: 19" | Average install: 4-6 hrs.

Seat adjustments | FRONT: 1 ½ more than OEM | BACK: 1" more than OEM

**★**MUST BE A LONG WHEELBASE – NOT AVAILABLE FOR SHORT WHEELBASE.

Sedona | 2<sup>nd</sup> ROW RIGHT (passenger side) ◆◆not available for SHORT WHEELBASE

\*Transfer height: 19" | Average install: 4-6 hrs.

Seat adjustments | FRONT: 1 ½ more than OEM | BACK: 1" more than OEM

**★**MUST BE A LONG WHEELBASE – NOT AVAILABLE FOR SHORT WHEELBASE.

\*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: 34" less than OEM | BACK: 114" more than OEM

OEM wire harness must be cut and extended under seat.

Higher trim levels may cause loss of some seat features.

Vented seat base fan removed from seat.

LK-KIA16CL

\*Transfer height: 19" | Average install: 7-9 hrs. Seat adjustments | FRONT: 11/2" more than OEM | BACK: OEM

⇒ Please specify if equipped with heated seats. (Add. parts & time)

\*Transfer height: 19" | Average install: 7-9 hrs. Seat adjustments | FRONT: 11/2" more than OEM | BACK: OEM

Sedona | 2<sup>nd</sup> ROW RIGHT (passenger side)

OEM shrouds must be trimmed.

⇒ Please specify if equipped with heated seats. (Add. parts & time) Please specify if equipped with OEM footrest | LK-KIA16CFR (Footrest removed)

Carnival | DRIVER

B pillar shroud needs to be cut | STENCIL PROVIDED

★ Adapt Solutions' signature TALL programing NOT AVAILABLE

\*Transfer height: 19" | Average install: 10-12 hrs.

Seat adjustments | FRONT: 1/4" less than OEM | BACK: 3/4" more than OEM

OEM wire harness must be cut and extended under seat.

Floor mat behind the LINK has to be removed or modified

Fabric flap behind the seat has to be cut & modified

Vented seat base fan removed from seat.

⇒ Please specify if equipped with seat memory. (Add. parts & time)

2022-2026 Carnival | FRONT PASSENGER

LK-KIA22R

Seat height: 11/8" higher than OEM highest | 11/8" higher than OEM lowest OEM seat trim must be modified | STENCIL PROVIDED

Control box needs to be relocated.

Custom tool provided for access to spare wheel under LINK.

⇒ Please specify if POWER SEATS different install manual supplied.

\*Transfer height: 19" | Average install: 10-12 hrs. Seat adjustments | FRONT: 17/8" less than OEM | BACK: 13/8" more than OEM

OEM wire harness must be cut and extended under seat. Occupant sensor plug must be extended directly from the floor Floor mat behind the LINK has to be removed or modified Fabric flap behind the seat has to be cut & modified

Vented seat base fan removed from seat.

2022-2026 Carnival | 2<sup>nd</sup> ROW LEFT (driver side)

LK-KIA22CL

Seat height: 9/16" higher than OEM highest | 9/16" higher than OEM lowest OEM seat trim must be modified | STENCIL PROVIDED

\*Transfer height: 18 1/4" | Average install: 6-8 hrs. Seat adjustments FRONT: 17/8" less than OEM | BACK: 1" less than OEM

**★NOT AVAILABLE IF EQUIPPED WITH POWER SEAT** 

Rear foam of the seat cushion must be modified

2022-2026 Carnival | 2nd ROW RIGHT (passenger side)

LK-KIA22CR

Seat height: 9/16" higher than OEM highest | 9/16" higher than OEM lowest OEM seat trim must be modified | STENCIL PROVIDED

\*Transfer height: 18 1/4" | Average install: 6-8 hrs. Seat adjustments FRONT: 17/8" less than OEM | BACK: 1" less than OEM

**★** NOT AVAILABLE IF EQUIPPED WITH POWER SEAT Rear foam of the seat cushion must be modified





2020-2025 Telluride | DRIVER

LK-PAL20L

Seat height: 1 ¾'' lower than OEM highest | 3/8 '' higher than OEM lowest OEM shrouds must be trimmed | STENCIL PROVIDED Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

Door must be shimmed | SHIM PROVIDED

If your seat is equipped with extendable thigh support, feature is cancelled Telluride | FRONT PASSENGER

LK-PAL20R

Seat height: 2 1/8 ''lower than OEM highest | 3/8 '' higher than OEM lowest OEM shrouds must be trimmed | STENCIL PROVIDED

Door must be shimmed | SHIM PROVIDED

If your seat is equipped with ventilation, feature is cancelled

\*Transfer height: 19" | Average install: 10-12 hrs.
Seat adjustments | FRONT: 1 3/4" less than OEM | BACK: 1 3/4" more than OEM

OEM wire harness must be cut and extended under seat. If your seat is equipped with ventilation, feature is cancelled Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees

**★**NOT AVAILABLE FOR MODELS WITH MANUAL SEAT

\*Transfer height: 19" | Average install: 10-12 hrs. Seat adjustments | FRONT: 1 3/4" less than OEM | BACK: 1 3/4" more than OEM OEM wire harness must be cut and extended under seat. Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees

**★NOT AVAILABLE FOR MODELS WITH MANUAL SEAT** 



2011-2020

LK-TOY11L

Seat height: OEM (Manual seat) | 1" lower than OEM top (adjustable seat) OEM shrouds must be trimmed.

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

⇒ Please specify if POWER SEATS | additional parts supplied.

Please specify if ALL WHEEL DRIVE | additional parts supplied.

Sienna | FRONT PASSENGER 2011-2020

LK-TOY11R

Seat height: OEM (Manual seat) | 1" lower than OEM top (adjustable seat) OEM shrouds must be trimmed.

⇒ Please specify if POWER SEATS | additional parts supplied.

⇒ Please specify if JBL SOUND SYSTEM | additional parts supplied.

2011-2020

Sienna | 2<sup>nd</sup> ROW LEFT (driver side)

LK-TOY11CL

Seat height: OEM OEM shrouds must be replaced | PROVIDED.

PLEASE SEE ADDITIONAL SPECIFICATION SHEET. (BATTERY)

⇒ Please specify if equipped with OEM footrest | LK-TOY11CFL Footrest removed

2011-2020

Sienna | 2<sup>nd</sup> ROW RIGHT (passenger side)

LK-TOY11CR

Seat height: OEM OEM shrouds must be replaced | PROVIDED.

⇒ Please specify if equipped with OEM footrest | LK-TOY11CFR Footrest removed

Sienna | DRIVER

LK-TOY21L

Seat height: OEM

OEM shrouds must be trimmed.

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

⇒ Please specify if POWER SEATS | additional parts supplied.

(Black trims will be supplied for all interiors)

\*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: 3.5" less than OEM | BACK: OEM

OEM wire harness must be cut and extended under seat.

Armrest must be modified | Retained. Action required for use. ⇒ Please specify if ADJUSTABLE ARMREST WITH BUTTON.

PLEASE SEE ADDITIONAL SPECIFICATION SHEET. (BATTERY)

\*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: 3.5" less than OEM | BACK: OEM OEM wire harness must be cut and extended under seat.

⇒ Please specify if ALL WHEEL DRIVE | additional parts supplied.

PLEASE SEE ADDITIONAL SPECIFICATION SHEET. (BATTERY)

\*Transfer height: 19" | Average install: 7-9 hrs.

Seat adjustments | FRONT: 5 1/4" less than OEM | BACK: OEM (9" travel) Gas tank must be partially lowered to access floor adaptor bolts.

**★NOT AVAILABLE FOR 8 PASSENGER SIENNA (60/40 SPLIT)** 

\*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: 5 1/4" less than OEM | BACK: OEM (9" travel) PLEASE SEE ADDITIONAL SPECIFICATION SHEET. (BATTERY)

**★NOT AVAILABLE FOR 8 PASSENGER with OEM Footrest** 

\*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: 3" less than OEM | BACK: 2 1/2" more than OEM

OEM wire harness must be cut and extended under seat.

★Fan removed from seat and seatback.

**★**Adapt Solutions' signature TALL programing **NOT AVAILABLE**.

\*Transfer height: 19" | Average install: 6-8 hrs.

⇒ Please specify if SEAT is equipped with LUMBAR SUPPORT.

Seat adjustments | FRONT: 3.5" less than OEM | BACK: OEM

OEM wire harness must be cut and extended under seat.

Sienna | FRONT PASSENGER 2021-2026

LK-TOY21R

Seat height: OEM

OEM shrouds must be trimmed.

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

⇒ Please specify if POWER SEATS | additional parts supplied.

(Black trims will be supplied for all interiors)

Sienna | 2<sup>nd</sup> ROW LEFT (driver side) 2021-2026

LK-TOY21C7L

Seat height: 5/16" higher than OEM

OEM wire harness must be cut and extended under seat.

(Black trims will be supplied for all interiors)

Sienna | 2<sup>nd</sup> ROW RIGHT (passenger side)

2021-2026 LK-TOY21C7R

Seat height: 5/16" higher than OEM

OEM wire harness must be cut and extended under seat.

(Black trims will be supplied for all interiors)

\*Transfer height: 19" | Average install: 6-8 hrs.

★ Adapt Solutions' signature TALL programing NOT AVAILABLE.

Seat adjustments | FRONT:7/8" more than OEM | BACK: 3 1/4" less than OEM.

**★NOT AVAILABLE FOR 8 PASSENGER SIENNA (60/40 SPLIT)** 

Please specify if equipped with OEM footrest

★Fan removed from seat and seatback.

\*Transfer height: 19" | Average install: 6-8 hrs. Seat adjustments | FRONT: 7/8" more than OEM | BACK: 3 1/4" less than OEM.

**★NOT AVAILABLE FOR 8 PASSENGER with OEM Footrest** 

⇒ Please specify if 8 passengers | LK-TOY21C8R.

2005-2023 Tacoma Access Cab - Suicide door | FRONT PASSENGER

LK-TACD05R

Seat height: 1" higher than OEM

OEM shrouds must be trimmed.

\*Transfer height: 19" | Average install: 4-6 hrs. Seat adjustments | FRONT: 1/2" less than OEM | BACK: 1" less than OEM OEM wire harness must be cut and extended under seat.

★ Adapt Solutions' signature TALL programing NOT AVAILABLE

Tacoma Double Cab – 4 door | FRONT PASSENGER 2005-2023

LK-TACD05R

Seat height: 1" higher than OEM OEM shrouds must be trimmed.

\*Transfer height: 19" | Average install: 4-6 hrs. Seat adjustments | FRONT: 1/2" less than OEM | BACK: 1" less than OEM

OEM wire harness must be cut and extended under seat.



2014-2021	Tundra Double Cab - 4 door (2 sm	aller)   DRIVER	
LK-TUN14L		*Transfer height: 21"   Average install: 6-8 hrs.	
	ıl seat)   1" higher than OEM lowest(adjustable seat)	Seat adjustments   FRONT: 1" less than OEM   BACK: OEM	
OEM shrouds must be trim	imed. ds to be cut   STENCIL PROVIDED.	OEM wire harness must be cut and extended under seat.  Vented seat base fan retained.	
	y seat (power thigh)   additional parts supplied.	Higher trim levels may cause loss of some seat features.	
2014-2021	Tundra Double Cab - 4 door (2 sm		
LK-TUN14R		*Transfer height: 21"   Average install: 6-8 hrs.	
	Il seat)   1" higher than OEM lowest(adjustable seat)	Seat adjustments   FRONT: 1" less than OEM   BACK: OEM	
OEM shrouds must be trim	imed.	OEM wire harness must be cut and extended under seat.	
	use loss of some seat features.	Vented seat base fan removed from seat. (In LIMITED & 1794)	
2014-2021	Tundra Crew Max - 4 door   DRIVER		
LK-TUN14L		*Transfer height: 21"   Average install: 6-8 hrs.	
Seat height: OEM (Manua OEM shrouds must be trim	ıl seat)   1" higher than OEM lowest(adjustable seat)	Seat adjustments   FRONT: 1" less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat.	
	ds to be cut   STENCIL PROVIDED.	Vented seat base fan retained.	
	y seat (power thigh)   additional parts supplied.	Higher trim levels may cause loss of some seat features.	
2014-2021	Tundra Crew Max - 4 door   FRONT	PASSENGER	
LK-TUN14R		*Transfer height: 21"   Average install: 6-8 hrs.	
	Il seat)   1" higher than OEM lowest(adjustable seat)	Seat adjustments   FRONT: 1" less than OEM   BACK: OEM	
OEM shrouds must be trim	imed. use loss of some seat features.	OEM wire harness must be cut and extended under seat.  Vented seat base fan removed from seat. (In LIMITED & 1794)	
2022-2026	Tundra Crew Max - 4 door   DRIVEI	·	
LK-TUN22L	Tulidia Clew Max - 4 dool   Dilivel		
	n OEM lowest(adjustable seat)	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   less than OEM   BACK: OEM	
OEM shrouds must be trim		OEM wire harness must be cut and extended under seat.	
Door must be shimmed   S		Fabric flap behind the seat has to be cut & modified	
Control box needs to be r		Ventilated seat removed	
•	ds to be cut   STENCIL PROVIDED.  y seat (power thigh)   additional parts supplied.	★ONLY AVAILABLE FOR POWER SEATS.	
→ Flease specify if 12 way	y seat (power triigir)   additional parts supplied.		
2022 2027	Tundra Craw May 4 daar   FDONT	DACCENCED	
2022-2026	Tundra Crew Max - 4 door  FRONT		
LK-TUN22R		*Transfer height: 21 1/2"   Average install: 8-10 hrs.	
LK-TUN22R Seat height: 2" higher tha	n OEM lowest(adjustable seat)	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2" less than OEM   BACK: OEM	
LK-TUN22R	n OEM lowest(adjustable seat) med.	*Transfer height: 21 1/2"   Average install: 8-10 hrs.	
LK-TUN22R Seat height: 2" higher tha OEM shrouds must be trim Door must be shimmed   S Control box needs to be r	n OEM lowest(adjustable seat) imed. HIM PROVIDED relocated.	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed	
LK-TUN22R Seat height: 2" higher tha OEM shrouds must be trim Door must be shimmed   S Control box needs to be r Lower B pillar shroud need	n OEM lowest(adjustable seat) imed. HIM PROVIDED relocated. ds to be cut   STENCIL PROVIDED	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified	
LK-TUN22R Seat height: 2" higher tha OEM shrouds must be trim Door must be shimmed   S Control box needs to be r Lower B pillar shroud need 2013-2018	n OEM lowest(adjustable seat) imed. HIM PROVIDED relocated.	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   ess than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed  *ONLY AVAILABLE FOR POWER SEATS.	
LK-TUN22R Seat height: 2" higher tha OEM shrouds must be trim Door must be shimmed   S Control box needs to be r Lower B pillar shroud need 2013-2018  LK-RAV13R	n OEM lowest(adjustable seat) amed. HIM PROVIDED elocated. ds to be cut   STENCIL PROVIDED  Rav 4   FRONT PASSENGER	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   ess than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed  *ONLY AVAILABLE FOR POWER SEATS.  *Transfer height: 19"   Average install: 6-8 hrs.	
LK-TUN22R Seat height: 2" higher tha OEM shrouds must be trim Door must be shimmed   S Control box needs to be r Lower B pillar shroud need 2013-2018  LK-RAV13R Seat height: ½" higher tha	n OEM lowest(adjustable seat) imed. HIM PROVIDED elocated. ds to be cut   STENCIL PROVIDED  Rav 4   FRONT PASSENGER	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed  *ONLY AVAILABLE FOR POWER SEATS.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 3 ¼"   less than OEM   BACK: 2 ¼" more than OEM	Л
LK-TUN22R Seat height: 2" higher tha OEM shrouds must be trim Door must be shimmed   S Control box needs to be r Lower B pillar shroud need 2013-2018 LK-RAV13R Seat height: ½" higher tha OEM shrouds must be trim	n OEM lowest(adjustable seat) imed. HIM PROVIDED elocated. ds to be cut   STENCIL PROVIDED  Rav 4   FRONT PASSENGER	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   ess than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed  *ONLY AVAILABLE FOR POWER SEATS.  *Transfer height: 19"   Average install: 6-8 hrs.	Л
LK-TUN22R Seat height: 2" higher tha OEM shrouds must be trim Door must be shimmed   S Control box needs to be r Lower B pillar shroud need 2013-2018 LK-RAV13R Seat height: ½" higher tha OEM shrouds must be trim	n OEM lowest(adjustable seat) imed. HIM PROVIDED elocated. ds to be cut   STENCIL PROVIDED  Rav 4   FRONT PASSENGER	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed  *ONLY AVAILABLE FOR POWER SEATS.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 3 ¼"   less than OEM   BACK: 2 ¼" more than OEM	Л
LK-TUN22R Seat height: 2" higher that OEM shrouds must be trim Door must be shimmed   S Control box needs to be recover B pillar shroud needs 2013-2018 LK-RAV13R Seat height: ½" higher that OEM shrouds must be trim Please specify if POWER	n OEM lowest(adjustable seat) imed. HIM PROVIDED relocated. ds to be cut   STENCIL PROVIDED  Rav 4   FRONT PASSENGER  an OEM amed. R SEATS   additional parts supplied.	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed  *ONLY AVAILABLE FOR POWER SEATS.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 3 ¼"   less than OEM   BACK: 2 ¼" more than OEM OEM wire harness must be cut and extended under seat.	√l
LK-TUN22R Seat height: 2" higher tha OEM shrouds must be trim Door must be shimmed   S Control box needs to be r Lower B pillar shroud need 2013-2018  LK-RAV13R Seat height: ½" higher tha OEM shrouds must be trim Please specify if POWER 2019-2025	n OEM lowest(adjustable seat) amed. HIM PROVIDED elocated. ds to be cut   STENCIL PROVIDED  Rav 4   FRONT PASSENGER an OEM amed. R SEATS   additional parts supplied. Rav 4   FRONT PASSENGER	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed  *ONLY AVAILABLE FOR POWER SEATS.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 3 ¼"   less than OEM   BACK: 2 ¼" more than OEM	√1
LK-TUN22R Seat height: 2" higher that OEM shrouds must be trim Door must be shimmed   State Control box needs to be recovered by the control box needs to be trimulated by the control box needs to be recovered by the control box nee	n OEM lowest(adjustable seat) imed. HIM PROVIDED elocated. ds to be cut   STENCIL PROVIDED  Rav 4   FRONT PASSENGER  an OEM imed. R SEATS   additional parts supplied. Rav 4   FRONT PASSENGER	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed  *ONLY AVAILABLE FOR POWER SEATS.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 3 ¼"   less than OEM   BACK: 2 ¼" more than OEM OEM wire harness must be cut and extended under seat.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: ½"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat.	√l
LK-TUN22R Seat height: 2" higher that OEM shrouds must be trim Door must be shimmed   S Control box needs to be recovered by Lower B pillar shroud needs 2013-2018 LK-RAV13R Seat height: ½" higher that OEM shrouds must be trim Please specify if POWER 2019-2025 LK-RAV19R Seat height: ½" higher that OEM shrouds must be trim Door must be shimmed   S	n OEM lowest(adjustable seat) imed. HIM PROVIDED elocated. ds to be cut   STENCIL PROVIDED  Rav 4   FRONT PASSENGER  an OEM imed. R SEATS   additional parts supplied. Rav 4   FRONT PASSENGER  an OEM imed. HIM PROVIDED	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed  *ONLY AVAILABLE FOR POWER SEATS.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 3 ¼"   less than OEM   BACK: 2 ¼" more than OEM OEM wire harness must be cut and extended under seat.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: ½"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Vented seat base fan removed from seat.	√1
LK-TUN22R Seat height: 2" higher that OEM shrouds must be trim Door must be shimmed   State Control box needs to be recovered by the Lower B pillar shroud needs to be recovered by the LK-RAV13R Seat height: ½" higher that OEM shrouds must be trim Please specify if POWER 2019-2025 LK-RAV19R Seat height: ½" higher that OEM shrouds must be trim Door must be shimmed   State Control of the Lower Management of the Lo	n OEM lowest(adjustable seat) imed. HIM PROVIDED elocated. ds to be cut   STENCIL PROVIDED  Rav 4   FRONT PASSENGER  an OEM amed. R SEATS   additional parts supplied. Rav 4   FRONT PASSENGER  an OEM amed. HIM PROVIDED ure TALL programing NOT AVAILABLE.	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed  *ONLY AVAILABLE FOR POWER SEATS.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 3 ¼"   less than OEM   BACK: 2 ¼" more than OEM OEM wire harness must be cut and extended under seat.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: ½"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Vented seat base fan removed from seat. Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.	√l
LK-TUN22R Seat height: 2" higher that OEM shrouds must be trim Door must be shimmed   State Control box needs to be recovered by the Lower B pillar shroud needs to be recovered by the LK-RAV13R Seat height: ½" higher that OEM shrouds must be trim Please specify if POWER 2019-2025 LK-RAV19R Seat height: ½" higher that OEM shrouds must be trim Door must be shimmed   State Compatible with HYBRID recovered by the Large Compatible with HYBRID recovered by the Lorentz of t	n OEM lowest(adjustable seat) imed. HIM PROVIDED relocated. ds to be cut   STENCIL PROVIDED  Rav 4   FRONT PASSENGER  an OEM amed. R SEATS   additional parts supplied. Rav 4   FRONT PASSENGER  an OEM amed. HIM PROVIDED ure TALL programing NOT AVAILABLE. model.	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed  *ONLY AVAILABLE FOR POWER SEATS.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 3 ¼"   less than OEM   BACK: 2 ¼" more than OEM OEM wire harness must be cut and extended under seat.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: ½"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Vented seat base fan removed from seat.	√1 
LK-TUN22R Seat height: 2" higher tha OEM shrouds must be trim Door must be shimmed   S Control box needs to be r Lower B pillar shroud need 2013-2018  LK-RAV13R Seat height: ½" higher tha OEM shrouds must be trim Please specify if POWER 2019-2025  LK-RAV19R Seat height: ½" higher tha OEM shrouds must be trim Door must be shimmed   S  Adapt Solutions' signat Compatible with HYBRID r	n OEM lowest(adjustable seat) imed. HIM PROVIDED elocated. ds to be cut   STENCIL PROVIDED  Rav 4   FRONT PASSENGER  an OEM amed. R SEATS   additional parts supplied. Rav 4   FRONT PASSENGER  an OEM amed. HIM PROVIDED ure TALL programing NOT AVAILABLE.	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed  *ONLY AVAILABLE FOR POWER SEATS.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 3 ¼"   less than OEM   BACK: 2 ¼" more than OEM OEM wire harness must be cut and extended under seat.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: ½"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Vented seat base fan removed from seat. Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.  *ONLY AVAILABLE FOR MANUAL SEATS.	√1
LK-TUN22R Seat height: 2" higher that OEM shrouds must be trim Door must be shimmed   Stochard Scontrol box needs to be recover 8 pillar shroud needs to be recover 8 pillar shroud needs to be recovered by the shrouds must be trim Please specify if POWER 2019-2025  LK-RAV19R Seat height: ½" higher that OEM shrouds must be trim Door must be shimmed   Stochard Solutions' signat Compatible with HYBRID recovered by the ship of	n OEM lowest(adjustable seat) imed. HIM PROVIDED relocated. ds to be cut   STENCIL PROVIDED  Rav 4   FRONT PASSENGER  an OEM amed. R SEATS   additional parts supplied. Rav 4   FRONT PASSENGER  an OEM amed. HIM PROVIDED ure TALL programing NOT AVAILABLE. model.	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed  *ONLY AVAILABLE FOR POWER SEATS.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 3 ¼"   less than OEM   BACK: 2 ¼" more than OEM OEM wire harness must be cut and extended under seat.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: ½"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Vented seat base fan removed from seat. Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.  *ONLY AVAILABLE FOR MANUAL SEATS.  *Transfer height: 19"   Average install: 5-7 hrs.	√1 
LK-TUN22R Seat height: 2" higher tha OEM shrouds must be trim Door must be shimmed   S Control box needs to be r Lower B pillar shroud need 2013-2018  LK-RAV13R Seat height: ½" higher tha OEM shrouds must be trim Please specify if POWER 2019-2025  LK-RAV19R Seat height: ½" higher tha OEM shrouds must be trim Door must be shimmed   S  Adapt Solutions' signat Compatible with HYBRID r	n OEM lowest(adjustable seat) imed. HIM PROVIDED elocated. is to be cut   STENCIL PROVIDED  Rav 4   FRONT PASSENGER  in OEM imed. R SEATS   additional parts supplied. Rav 4   FRONT PASSENGER  in OEM imed. HIM PROVIDED ure TALL programing NOT AVAILABLE. model. Venza   FRONT PASSENGER**	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed  *ONLY AVAILABLE FOR POWER SEATS.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 3 ¼"   less than OEM   BACK: 2 ¼" more than OEM OEM wire harness must be cut and extended under seat.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: ½"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Vented seat base fan removed from seat. Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.  *ONLY AVAILABLE FOR MANUAL SEATS.	v1
LK-TUN22R Seat height: 2" higher that OEM shrouds must be trim Door must be shimmed   Stocker B pillar shroud needs to be recovered by the control box needs to	n OEM lowest(adjustable seat) imed. HIM PROVIDED elocated. ds to be cut   STENCIL PROVIDED  Rav 4   FRONT PASSENGER  an OEM amed. R SEATS   additional parts supplied. Rav 4   FRONT PASSENGER  an OEM amed. HIM PROVIDED ure TALL programing NOT AVAILABLE. nodel.  Venza   FRONT PASSENGER**	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed  *ONLY AVAILABLE FOR POWER SEATS.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 3 ¼"   less than OEM   BACK: 2 ¼" more than OEM OEM wire harness must be cut and extended under seat.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: ½"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Vented seat base fan removed from seat. Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.  *ONLY AVAILABLE FOR MANUAL SEATS.  *Transfer height: 19"   Average install: 5-7 hrs. Seat adjustments   FRONT: INFO N/A   BACK: INFO N/A	√1 
LK-TUN22R Seat height: 2" higher tha OEM shrouds must be trim Door must be shimmed   S Control box needs to be r Lower B pillar shroud need 2013-2018 ◆ LK-RAV13R Seat height: ½" higher tha OEM shrouds must be trim → Please specify if POWER 2019-2025 LK-RAV19R Seat height: ½" higher tha OEM shrouds must be trim Door must be shimmed   S ★ Adapt Solutions' signat Compatible with HYBRID r 2008-2016 ◆ LK-VNZ08R Seat height: INFO N/A OEM shrouds must be trim Door opening increased v ★ Adapt Solutions' signat	In OEM lowest (adjustable seat) Inmed. HIM PROVIDED elocated. Is to be cut   STENCIL PROVIDED  Rav 4   FRONT PASSENGER  In OEM Inmed. In OEM Inmed. HIM PROVIDED UTE TALL programing NOT AVAILABLE. Inmodel. Venza   FRONT PASSENGER**  Inmed. With shim   PROVIDED. UTE TALL programing NOT AVAILABLE. Inmed. With shim   PROVIDED. UTE TALL programing NOT AVAILABLE. Inmed.	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed  *ONLY AVAILABLE FOR POWER SEATS.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 3 ¼"   less than OEM   BACK: 2 ¼" more than OEM OEM wire harness must be cut and extended under seat.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: ½"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Vented seat base fan removed from seat. Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.  *ONLY AVAILABLE FOR MANUAL SEATS.  *Transfer height: 19"   Average install: 5-7 hrs. Seat adjustments   FRONT: INFO N/A   BACK: INFO N/A OEM wire harness must be cut and extended under seat.	\d
LK-TUN22R Seat height: 2" higher that OEM shrouds must be trim Door must be shimmed   State Control box needs to be recovered by the Lower B pillar shroud needs to be recovered by the Lower B pillar shroud needs to be recovered by the Lower B pillar shroud needs to be recovered by the Lower B pillar shroud needs to be recovered by the LK-RAV13R  Seat height: ½" higher that OEM shrouds must be trim Door must be shimmed   State Compatible with HYBRID recovered by the LK-VNZ08R  Seat height: INFO N/A OEM shrouds must be trim Door opening increased the loght with the LK-VNZ08R	n OEM lowest(adjustable seat) imed. HIM PROVIDED elocated. is to be cut   STENCIL PROVIDED  Rav 4   FRONT PASSENGER  in OEM imed. R SEATS   additional parts supplied. Rav 4   FRONT PASSENGER  in OEM imed. HIM PROVIDED ure TALL programing NOT AVAILABLE. nodel.  Venza   FRONT PASSENGER**	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed  *ONLY AVAILABLE FOR POWER SEATS.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 3 ¼"   less than OEM   BACK: 2 ¼" more than OEM OEM wire harness must be cut and extended under seat.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: ½"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Vented seat base fan removed from seat. Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.  *ONLY AVAILABLE FOR MANUAL SEATS.  *Transfer height: 19"   Average install: 5-7 hrs. Seat adjustments   FRONT: INFO N/A   BACK: INFO N/A OEM wire harness must be cut and extended under seat.  *NOT AVAILABLE IF EQUIPPED WITH POWER SEAT ON PASSENGER SIDE.	
LK-TUN22R Seat height: 2" higher tha OEM shrouds must be trim Door must be shimmed   S Control box needs to be r Lower B pillar shroud need 2013-2018 ◆ LK-RAV13R Seat height: ½" higher tha OEM shrouds must be trim → Please specify if POWER 2019-2025 LK-RAV19R Seat height: ½" higher tha OEM shrouds must be trim Door must be shimmed   S ★ Adapt Solutions' signat Compatible with HYBRID r 2008-2016 ◆ LK-VNZ08R Seat height: INFO N/A OEM shrouds must be trim Door opening increased v ★ Adapt Solutions' signat	In OEM lowest (adjustable seat) Inmed. HIM PROVIDED elocated. Is to be cut   STENCIL PROVIDED  Rav 4   FRONT PASSENGER  In OEM Inmed. In OEM Inmed. HIM PROVIDED UTE TALL programing NOT AVAILABLE. Inmodel. Venza   FRONT PASSENGER**  Inmed. With shim   PROVIDED. UTE TALL programing NOT AVAILABLE. Inmed. With shim   PROVIDED. UTE TALL programing NOT AVAILABLE. Inmed.	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   ess than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed   *ONLY AVAILABLE FOR POWER SEATS.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 3 ¼"   less than OEM   BACK: 2 ¼" more than OEM OEM wire harness must be cut and extended under seat.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: ½"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Vented seat base fan removed from seat. Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.   *ONLY AVAILABLE FOR MANUAL SEATS.  *Transfer height: 19"   Average install: 5-7 hrs. Seat adjustments   FRONT: INFO N/A   BACK: INFO N/A OEM wire harness must be cut and extended under seat.   *NOT AVAILABLE IF EQUIPPED WITH POWER SEAT ON PASSENGER SIDE.   *Transfer height: 19"   Average install: 6-8 hrs.	
LK-TUN22R Seat height: 2" higher that OEM shrouds must be trim Door must be shimmed   State Control box needs to be recovered by the Lower B pillar shroud needs to be recovered by the Lower B pillar shroud needs to be recovered by the Lower B pillar shroud needs to be recovered by the Lower B pillar shroud needs to be the Lower B pillar shrouds must be trim Deads shrouds must be trim Door must be shimmed   State Compatible with HYBRID recovered by the LK-VNZOBR Seat height: INFO N/A OEM shrouds must be trim Door opening increased when Lower Bolutions' signat 2014-2019 LK-HLD14R Seat height: OEM	In OEM lowest (adjustable seat) Imed. HIM PROVIDED elocated. Is to be cut   STENCIL PROVIDED  Rav 4   FRONT PASSENGER  In OEM Imed. R SEATS   additional parts supplied.  Rav 4   FRONT PASSENGER  In OEM Imed. HIM PROVIDED UTE TALL programing NOT AVAILABLE. In Imed. With shim   PROVIDED. UTE TALL programing NOT AVAILABLE. HIM PROVIDED. UTE TALL programing NOT AVAILABLE. HIM PROVIDED. UTE TALL programing NOT AVAILABLE. HIGHLANDER   FRONT PASSENGER	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed  *ONLY AVAILABLE FOR POWER SEATS.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 3 ¼"   less than OEM   BACK: 2 ¼" more than OEM OEM wire harness must be cut and extended under seat.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: ½"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Vented seat base fan removed from seat. Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.  *ONLY AVAILABLE FOR MANUAL SEATS.  *Transfer height: 19"   Average install: 5-7 hrs. Seat adjustments   FRONT: INFO N/A   BACK: INFO N/A OEM wire harness must be cut and extended under seat.  *NOT AVAILABLE IF EQUIPPED WITH POWER SEAT ON PASSENGER SIDE.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 2 ¼"   less than OEM   BACK: 1¼" more than OEM  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 2 ¼"   less than OEM   BACK: 1¼" more than OEM	
LK-TUN22R Seat height: 2" higher that OEM shrouds must be trim Door must be shimmed   State Control box needs to be recover B pillar shroud needs to be recover B pillar shroud needs to be recover B pillar shroud needs to be recovered by the pillar shroud needs to be trim to be trim to provide the pillar shrouds must be trim Door must be shimmed   State Compatible with HYBRID recovered by the pillar shrouds must be trim Door must be shimmed   State Compatible with HYBRID recovered by the pillar shrouds must be trim Door opening increased to the pillar shrouds must be trim Door opening increased to the pillar shrouds must be trim Door opening increased to the pillar shrouds must be trim Door opening increased to the pillar shrouds must be trim Door opening increased to the pillar shrouds must be trim Door opening increased to the pillar shrouds must be trim OEM Seat height: OEM OEM shrouds must be trim OEM oEM shrouds must be trim OEM oEM shrouds must be trim Door must be trim OEM oEM shrouds must be trim OEM oEM shrouds must be trim OEM oEM shrouds must be trim Door must be trim Door opening increased to the pillar shrouds must be trim Door opening increased to the pillar shrouds must be trim OEM oEM shrouds must be trim Door opening increased to the pillar shrouds must be trim Door opening increased to the pillar shrouds must be trim Door opening increased to the pillar shrouds must be trim Door opening increased to the pillar shrouds must be trim Door opening increased to the pillar shrouds must be trim Door opening increased to the pillar shrouds must be trim Door opening increased to the pillar shrouds must be trim Door opening increased to the pillar shrouds must be trim Door opening increased to the pillar shrouds must be trim Door opening increased to the pillar shrouds must be trim Door opening increased to the pillar shrouds must be trim Door opening increased to the pillar shrouds must be trim Door opening increased to the pillar shrouds must be trim Door opening increased to the pillar shrouds must be	In OEM lowest (adjustable seat) Inmed. HIM PROVIDED elocated. Is to be cut   STENCIL PROVIDED  Rav 4   FRONT PASSENGER  In OEM Inmed. In OEM Inmed. HIM PROVIDED UTE TALL programing NOT AVAILABLE. Innodel. Venza   FRONT PASSENGER**  Inmed. With shim   PROVIDED. UTE TALL programing NOT AVAILABLE. HIGHlander   FRONT PASSENGER	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed  *ONLY AVAILABLE FOR POWER SEATS.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 3 ¼"   less than OEM   BACK: 2 ¼" more than OEM OEM wire harness must be cut and extended under seat.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: ½"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Vented seat base fan removed from seat. Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.  *ONLY AVAILABLE FOR MANUAL SEATS.  *Transfer height: 19"   Average install: 5-7 hrs. Seat adjustments   FRONT: INFO N/A   BACK: INFO N/A OEM wire harness must be cut and extended under seat.  *NOT AVAILABLE IF EQUIPPED WITH POWER SEAT ON PASSENGER SIDE.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 2 ¼"   less than OEM   BACK: 1¼" more than OEM OEM wire harness must be cut and extended under seat.	
LK-TUN22R Seat height: 2" higher that OEM shrouds must be trim Door must be shimmed   Stephen Control box needs to be recover B pillar shroud needs to be trim Please specify if POWER 2019-2025  LK-RAV19R Seat height: ½" higher that OEM shrouds must be trim Door must be shimmed   Stephen Stephen Seat height: INFO N/A OEM shrouds must be trim Door opening increased that Door opening increa	In OEM lowest (adjustable seat) Imed. HIM PROVIDED elocated. Is to be cut   STENCIL PROVIDED  Rav 4   FRONT PASSENGER  In OEM Imed. R SEATS   additional parts supplied.  Rav 4   FRONT PASSENGER  In OEM Imed. HIM PROVIDED UTE TALL programing NOT AVAILABLE. In Imed. With shim   PROVIDED. UTE TALL programing NOT AVAILABLE. HIM PROVIDED. UTE TALL programing NOT AVAILABLE. HIM PROVIDED. UTE TALL programing NOT AVAILABLE. HIGHLANDER   FRONT PASSENGER	*Transfer height: 21 1/2"   Average install: 8-10 hrs. Seat adjustments   FRONT: 1/2"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified Ventilated seat removed  *ONLY AVAILABLE FOR POWER SEATS.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 3 ¼"   less than OEM   BACK: 2 ¼" more than OEM OEM wire harness must be cut and extended under seat.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: ½"   less than OEM   BACK: OEM OEM wire harness must be cut and extended under seat. Vented seat base fan removed from seat. Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.  *ONLY AVAILABLE FOR MANUAL SEATS.  *Transfer height: 19"   Average install: 5-7 hrs. Seat adjustments   FRONT: INFO N/A   BACK: INFO N/A OEM wire harness must be cut and extended under seat.  *NOT AVAILABLE IF EQUIPPED WITH POWER SEAT ON PASSENGER SIDE.  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 2 ¼"   less than OEM   BACK: 1¼" more than OEM  *Transfer height: 19"   Average install: 6-8 hrs. Seat adjustments   FRONT: 2 ¼"   less than OEM   BACK: 1¼" more than OEM	



LINK PAGE 19 OF 19

2023-2026 Grand Highlander | FRONT PASSENGER

LK-HLD24R

Seat height: 1 3/8" lower than OEM highest | 7/8" higher than OEM lowest

OEM shrouds must be trimmed.

Lower B pillar shroud needs to be cut | STENCIL PROVIDED

Compatible with HYBRID model.

Highlander | FRONT PASSENGER

2023-2026 LK-HLD24R

Seat height: 1 3/8" lower than OEM highest | 7/8" higher than OEM lowest

OEM shrouds must be trimmed.

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

Compatible with HYBRID model.

\*Transfer height: 19" | Average install: 8-10 hrs.

Seat adjustments | FRONT: 7/8" less than OEM | BACK: 1 1/8" more than OEM Vented seat base fan removed from seat.

OFM wire harness must be cut and extended under seat.

Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.

\*Transfer height: 19" | Average install: 8-10 hrs.

Seat adjustments | FRONT: 7/8" less than OEM | BACK: 1 1/8" more than OEM

Vented seat base fan removed from seat.

OEM wire harness must be cut and extended under seat.

Seat leans towards rear of vehicle once outside. ANGLE: 5 degrees.



### Volkswagen

2009-2012 Routan | DRIVER

LK-CHRG08L

Seat height: OEM

OEM shrouds must be trimmed.

Outer seat shroud removed and replaced | PROVIDED Power seat buttons integrated into provided shroud.

Please specify if equipped with power seats.

2009-2012

Routan | FRONT PASSENGER

LK-CHRG08R

Seat height: OEM OEM shrouds must be trimmed.

Mid-row seat (Stow 'N Go) immediately behind LINK cannot be stowed.

2009-2012

Routan | 2nd ROW LEFT (driver side)

LK-CHRG08CL

Seat height: OEM

OEM shrouds must be trimmed

LK-CHRG08CR

2018-2026

Seat height: 1" lower than OEM highest | 1 1/2" higher than OEM lowest

\*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

Armrest must be removed | COVER CAP PROVIDED. OEM wire harness must be cut and extended under seat.

Mid-row seat (Stow 'N Go) immediately behind LINK cannot be stowed.

\*Transfer height: 19" | Average install: 6-8 hrs.

Seat adjustments | FRONT: INFO N/A | BACK: INFO N/A

OEM wire harness must be cut and extended under seat.

\*Transfer height: 19" | Average install: 6-8 hrs.

Seat | FRONT: 5 inches more than OEM | BACK: OEM

**★**Must be **Stow** 'N **Go** seating (not bench)

2009-2012 Routan | 2<sup>nd</sup> ROW RIGHT (passenger side)

Seat height: OEM

OEM shrouds must be trimmed

\*Transfer height: 19" | Average install: 6-8 hrs. Seat adjustments | FRONT: 5 inches more than OEM | BACK: OEM

★ Must be Stow 'N Go seating (not bench)

Atlas | DRIVER

LK-ATL18L

Outer seat trim panel modified. Inner trim panel cut | STENCIL PROVIDED. Lower B-pillar shroud needs to be trimmed | STENCIL PROVIDED.

⇒ Please specify if equipped with seat memory (add parts & time)

Memory control needs to be relocated

⇒ Please specify if Manual Seat.

\*Transfer height: Coming Soon | Average install: 8-10 hrs. Seat adjustments | FRONT: 1 1/2" less than OEM | BACK: 2 1/2" more than OEM

OEM wire harness must be cut and extended under seat. Fabric flap behind the seat has to be cut & modified

★ Adapt Solutions' signature TALL programing NOT AVAILABLE.

Black trims will be supplied for all interiors

Fabric flap behind the seat has to be cut & modified

HT APPLICATION

2018-2026 Atlas | FRONT PASSENGER

LK-ATL18R

Seat height: 1" lower than OEM highest | 1 1/2" higher than OEM lowest OEM shrouds must be trimmed. | STENCIL PROVIDED.

Lower B-pillar shroud needs to be trimmed | STENCIL PROVIDED.

\* NOT AVAILABLE model for manual seats between 2018-2022

\*Transfer height: Coming Soon | Average install: 8-10 hrs.

Seat adjustments | FRONT: 2 1/2" less than OEM | BACK: 1 1/2" more than OEM OEM wire harness must be cut and extended under seat.

★ Adapt Solutions' signature TALL programing NOT AVAILABLE.

Black trims will be supplied for all interiors

ASENTO | XL-SEAT







### **FIND A DEALER**

Looking for a dealer near you or a client? Use our interactive map to find one.



### **HOW IT WORKS VIDEO**

In just a few minutes, see all of the key features of the product.



### **PRODUCT VIDEO**

Overview of the ASENTO & SPEEDY-LIFT in motion.



### **HIGHLIGHTS:**

- OEM seat and adjustments remain intact
- Easy to use, foldable and removable transfer board.
- Can be paired with the SPEEDY-LIFT
- Driver or front passenger applications available
- 3-year warranty
- 275 lbs capacity.



### **THINGS TO NOTE**

OEM plastic shroud and trim might be modified or replace on a per vehicle basis for the transfer board operation. If additional information is required, we, or our authorized dealers, will provide information needed on request.



## **XL SEAT | ASENTO QUICK REFERENCE**

★= HI-LIFT available with XL-SEAT HI-LIFT NOT AVAILABLE with ASENTO

page 1 of 3

♦ Due to the age of the application, shipping LEAD TIME of installation kit may vary. Contact us directly for an estimated lead time.

CHRYSLER		DRIVER	FRONT PASSENGER
Caravan / Grand Caravan / Town & Country	2008 - 2020	* ✓	✓
Grand Caravan	2021 - 2026	✓	✓
Jeep Wrangler - 4 door	<b>♦</b> 2007 - 2018	<b>√</b> *	<b>√</b> *
Pacifica	2017 - 2026	✓	✓
Ram 1500 2500 3500 Reg Cab - 2 door	<b>♦</b> 2003 - 2009	✓	✓
Ram 1500 2500 3500 Quad Cab - 4 door	<b>♦</b> 2003 - 2009	✓	✓
Ram 1500 2500 3500 Crew/Mega Cab - 4 door	<b>♦</b> 2006 - 2009	✓	✓
Ram 1500 CLASSIC Crew Cab - 4 door	2009 - 2024	✓	✓
Ram 1500 Crew Cab – 4 door	2019 - 2026	<b>√</b> *	<b>√</b> *
Ram 1500 CLASSIC Quad Cab - 4 door	2009 - 2024	✓	✓
Ram 1500 Quad Cab – 4 door	2019 - 2026	<b>√</b> *	<b>√</b> *
Ram 2500/3500 Crew/Mega Cab - 4 door	2010 - 2018	✓	✓
Voyager	2020 - 2026	✓	✓
FORD		DRIVER	FRONT PASSENGER
Edge	2011 - 2014	✓	✓
Edge	2015 - 2024	✓	✓
Explorer	2011 - 2019	✓	✓
Explorer	2020 - 2026	<b>√</b> *	<b>√</b> *
Expedition / Navigator	2018 - 2024	<b>√</b> *	<b>√</b> *
F-150 Reg Cab - 2 door	<b>♦</b> 2004 - 2008	✓	✓
F-150 Reg Cab - 2 door, small suicide door	<b>♦</b> 2009 - 2010	✓	✓
F-150 Super Cab - Suicide door	<b>♦</b> 2004 - 2008	<b>√</b> *	<b>√</b> *
F-150 Super Cab - Suicide door	<b>♦</b> 2009 - 2014	<b>√</b> *	<b>√</b> *
F-150 Super Cab - Suicide door	2015 - 2026	<b>√</b> *	<b>√</b> *
F-150 Super Crew Cab - 4 door	<b>♦</b> 2004 - 2008	✓	✓
F-150 Super Crew Cab - 4 door	<b>♦</b> 2009 - 2014	✓	✓
F-150 Super Crew Cab - 4 door	2015 - 2017	✓	✓
F-150 Super Crew Cab - 4 door	2018 - 2026	✓	✓
F-250, F-350, F-450 Super Cab - Suicide door	<b>♦</b> 2008 - 2016	✓	✓
F-250, F-350, F-450 Super Cab - Suicide door	2017 - 2026	✓	✓
F-250, F-350, F-450 Super Crew - 4 door	<b>♦</b> 2008 - 2016	✓	✓
F-250, F-350, F-450 Super Crew - 4 door	2017 - 2026	✓	✓
Lincoln MKX	2016 - 2018	✓	✓
Mark LT - 4 door	<b>♦</b> 2006 - 2008	✓	✓
Nautilus	2019 - 2023	✓	✓

## **XL SEAT/ASENTO QUICK REFERENCE**

page 2 of 3

♦ Due to the age of the application, shipping LEAD TIME of installation kit may vary. Contact us directly for an estimated lead time.

FORD		DRIVER	FRONT PASSENGER
Ranger Super Crew Cab – 4 Door	2019 - 2023	✓	✓
Raptor Super Cab - Suicide door	<b>♦</b> 2011 - 2016	<b>√</b> *	<b>√</b> *
Raptor Super Cab - Suicide door	2017 - 2026	<b>√</b> *	<b>√</b> *
Raptor Super Crew Cab - 4 door	<b>♦</b> 2011 - 2016	✓	✓
Raptor Super Crew Cab - 4 door	2017 - 2026	✓	✓
GENERAL MOTORS		DRIVER	FRONT PASSENGER
Acadia	2017 - 2023	✓	✓
Avalanche	<b>♦</b> 2007 - 2010	✓	✓
Avalanche	<b>♦</b> 2011 - 2013	✓	✓
Blazer	2019 - 2026	√*	√*
Canyon / Colorado Extended Cab - Suicide door	<b>♦</b> 2004 - 2012	✓	✓
Canyon / Colorado Extended Cab - Suicide door	<b>♦</b> 2015 - 2022	✓	✓
Canyon / Colorado Crew Cab – 4 door	<b>♦</b> 2015 - 2022	✓	✓
Escalade / Suburban / Tahoe / Yukon - All models	<b>♦</b> 2007 - 2010	✓	✓
Escalade / Suburban / Tahoe / Yukon - All models	2011 - 2014	✓	✓
Escalade / Suburban / Tahoe / Yukon - All models	2015 - 2020	✓	✓
Escalade / Suburban / Tahoe / Yukon - All models	2021 - 2026	✓	✓
Sierra / Silverado Regular Cab - 2 door	<b>♦</b> 1999 - 2006	✓	✓
Sierra / Silverado Extended Cab - Without suicide door	<b>♦</b> 1999 - 2002	✓	✓
Sierra / Silverado Extended Cab - Suicide door	<b>♦</b> 2001 - 2006	✓	✓
Sierra / Silverado Extended Cab - Suicide door	<b>♦</b> 2007 - 2013	✓	✓
Sierra / Silverado Crew Cab - 4 door	<b>♦</b> 2007 - 2010	✓	✓
Sierra / Silverado Crew Cab - 4 door	<b>♦</b> 2011 - 2013	✓	✓
Sierra / Silverado <b>HD</b> (2500/3500) –Crew Cab	<b>♦</b> 2007 - 2010	✓	✓
Sierra / Silverado <b>HD</b> (2500/3500) –Crew Cab	<b>♦</b> 2011 - 2014	✓	✓
Sierra / Silverado <b>HD</b> (2500/3500) –Extended Cab	<b>♦</b> 2007 - 2014	✓	✓
Sierra / Silverado Double Cab – 4 door (2 smaller)	2014 - 2018	✓	✓
Sierra / Silverado Crew Cab - 4 door	2014 - 2018	✓	✓
Sierra / Silverado Double Cab - 4 door	2019 - 2026	<b>√</b> *	<b>√</b> *
Sierra / Silverado Crew Cab - 4 door	2019 - 2026	<b>√</b> *	√*
Sierra / Silverado <b>HD</b> (2500/3500) – All models	2015 - 2019	✓	✓
Sierra / Silverado <b>HD</b> (2500/3500) – All models	2020 - 2026	√*	√*
Terrain / Equinox	2018 - 2024	<b>√</b> *	√*
Traverse / Enclave	2018 - 2024	✓	✓
HONDA		DRIVER	FRONT PASSENGER
Odyssey	<b>♦</b> 2005 - 2010	* ✓	✓
Odyssey	<b>♦</b> 2011 - 2017	✓	✓
Odyssey	2018 - 2026	✓	✓
HYUNDAI		DRIVER	FRONT PASSENGER
Palisade	2020 - 2025	√*	√*

## **XL SEAT/ASENTO QUICK REFERENCE**

page 3 of 3

• Due to the age of the application, shipping LEAD TIME of installation kit may vary. Contact us directly for an estimated lead time.

KIA		DRIVER	FRONT PASSENGER
Sedona	2015 - 2021	✓ VER	FRONT FASSENGER  √
Carnival	2022 - 2026	√ <b>*</b>	<u> </u>
Telluride	2020 - 2025	<b>√</b> *	<b>√</b> *
MERCEDES	2020 2023	DRIVER	FRONT PASSENGER
Metris	2016 - 2023	✓ ✓	√ √
NISSAN	2010 2025	DRIVER	FRONT PASSENGER
Ariya	2022 - 2026	✓ ✓	√ √
SUBARU	2022 - 2020	DRIVER	FRONT PASSENGER
	2014 2010	DRIVER ✓	FRUNT PASSENGER  ✓
Forester	2014 - 2018		
TESLA		DRIVER	FRONT PASSENGER
X	2015 - 2020	<b>√</b>	<b>√</b>
X	2021 - 2026	✓	✓
TOYOTA		DRIVER	FRONT PASSENGER
4 Runner	2010 - 2024	✓	✓
Highlander	<b>♦</b> 2014 - 2019	✓	✓
Rav 4	<b>♦</b> 2006 - 2012	✓	✓
Rav 4	<b>♦</b> 2013 - 2018	√*	√*
Rav 4	2019 - 2025	✓	✓
Sienna	<b>♦</b> 2004 - 2010	* ✓	✓
Sienna	<b>♦</b> 2011 - 2020	* ✓	✓
Sienna	2021 - 2026	✓	✓
Tacoma Access Cab - Suicide door	2005 - 2015	✓	✓
Tacoma Double Cab - 4 reg. door	2005 - 2015	✓	✓
Tacoma Double Cab - 4 reg. door	2016 - 2023	✓	✓
Tacoma Access Cab - Suicide door	2016 - 2023	✓	✓
Tundra Double Cab - 4 door (2 smaller)	2014 - 2021	✓	✓
Tundra Crew Max - 4 door	2014 - 2021	✓	✓
VOLKSWAGEN		DRIVER	FRONT PASSENGER
Routan	<b>♦</b> 2009 - 2012	* ✓	✓
Atlas	2018 - 2026	✓	✓

Notes to specific applications marked * on the XL-SEAT/ASENTO QUICK <b>REFERENCE</b>				
ASENTO	Ram 2500 / 3500	2019-2026	* NOT AVAILABLE. Space and transfer height not compatible.	
XL-SEAT	Jeep Wrangler– 4 Door	2007-2018	*NOT AVAILABLE for JL model (2018)	
ASENTO	F-150 Super Cab	2009-2014	*NOT AVAILABLE for model with ONLY 2 DOORS.	
ASENTO	F-150 Super Cab	2009-2014	*NOT AVAILABLE for model with ONLY 2 DOORS.	
ASENTO	Ranger Super Cab	2019-2023	*NOT AVAILABLE.	
ASENTO	Expedition	2018-2024	*NOT AVAILABLE for model with MANUAL SEAT.	
ASENTO	Explorer	2020-2026	*NOT AVAILABLE for model with MANUAL SEAT.	
ASENTO	Blazer	2019-2026	*NOT AVAILABLE for ELECTRIC MODEL (Blazer EV)	
ASENTO	Sierra\ Silverado	2019-2026	*NOT AVAILABLE for ELECTRIC MODEL	
ASENTO	Terrain\ Equinox	2018-2024	*NOT AVAILABLE for ELECTRIC MODEL	
ASENTO	Palisade	2020-2025	*NOT AVAILABLE for model with MANUAL SEAT.	
ASENTO	Telluride	2020-2025	*NOT AVAILABLE for model with MANUAL SEAT.	
ASENTO	Navigator	2018-2024	*NOT AVAILABLE for model with PERFECT POSITION SEAT.	
ASENTO	Carnival	2022-2026	*NOT AVAILABLE for model with MANUAL SEAT (Driver).	
XL-SEAT	Rav 4	2013-2018	*NOT AVAILABLE for model with POWER SEATS.	

Due to the age of the application, shipping LEAD TIME of installation kit may vary. Contact us directly for estimated lead time.



### HI-LIFT NOT AVAILABLE with ASENTO

2021-2026 **Grand Caravan** 

EV-CHR17 \*Height: 21" / Average install: 2-4 hrs

Lower B-pillar shroud must be modified Seatbelt pre-tensioner must be relocated.

2017-2026

EV-CHR17 \*Height: 21" / Average install: 2-4 hrs

Lower B-pillar shroud must be modified Seatbelt pre-tensioner must be relocated.

Compatible with HYBRID model.

2020-2026 /ovader

EV-CHR17 \*Height: 21" / Average install: 2-4 hrs

Lower B-pillar shroud must be modified Seatbelt pre-tensioner must be relocated.

Ram 1500 Crew Cab - 4 door 2019-2026

EV-RAMQ19 \*Height: 24" / Average install: 3-5 hrs

Lower B pillar shroud replaced | PROVIDED. Doorsill shrouds must be cut | STENCIL PROVIDED.

Please specify if POWER SEATS | additional parts supplied. Buttons relocated to front of seat.

PASSENGER SIDE ONLY: Jack kit assembly must be relocated. ⇒ Please specify if NEW BODY STYLE or CLASSIC-2018 MODEL

Ram 1500 Quad Cab - 4 door 2019-2026

EV-RAMQ19 \*Height: 24" / Average install: 3-5 hrs

Doorsill shrouds must be cut | STENCIL PROVIDED. Lower B pillar shroud replaced | PROVIDED.

⇒ Please specify if POWER SEATS | additional parts supplied. Buttons relocated to front of seat.

PASSENGER SIDE ONLY: Jack kit assembly must be relocated. ⇒ Please specify if NEW BODY STYLE or CLASSIC-2018 MODEL



2015-2024 Edge

EV-EDG15 \*Height: 22½ " / Average install: 2-4 hrs

Lower B-pillar shroud must be modified

2018-2024 Expedition / Navigator

\*Height: 25.75" / Average install: 3-5 hrs EV-EXP18

Lower B-pillar shroud must be modified. | STENCIL PROVIDED OEM Seat trim must be modified

NOT AVAILABLE for model with MANUAL SEAT. Power seat buttons relocated to the front of the seat

NOT AVAILABLE for model with PERFECT POSITION SEAT (Navigator).

2020-2026 Explorer

EV-EXL20 \*Height: 22" / Average install: 2-4 hrs NOT AVAILABLE for model with MANUAL SEAT. Lower B-pillar shroud must be modified. | STENCIL PROVIDED

2017-2026 Raptor Super Crew Cab - 4 door

EV-F150C18 \*Height: 28" / Average install: 2-4 hrs

Lower B-pillar shroud must be modified. | STENCIL PROVIDED Upper B-pillar shroud modified

F-150 Super Crew Cab – 4 door 2018-2026

EV-F150C18 \*Height: 26" / Average install: 2-4 hrs Upper B-pillar shroud modified Lower B-pillar shroud must be modified. | STENCIL PROVIDED

2017-2026 F-250, F-350, F-450 Super Crew Cab - 4 door

EV-F150C18 / Average install: 2-4 hrs \*Heiaht: 28"

Upper B-pillar shroud modified Lower B-pillar shroud must be modified. | STENCIL PROVIDED

2016-2022 Lincoln MKX / Nautilus

EV-EDG15 \*Height: 22½ " / Average install: 2-4 hrs

Lower B-pillar shroud must be modified

2019-2023 Ranger Super Crew Cab

EV-RNG19 \*Height: 25" / Average install: 3-5 hrs

Lower B-pillar shroud must be modified. | STENCIL PROVIDED OEM seat trim must be modified. | STENCIL PROVIDED

\*ESTIMATED height ADAPT SOLUTIONS





## The ASENTO is available in driver & front passenger positions HI-LIFT NOT AVAILABLE with ASENTO

	_	
2017-2023	Acadia	
EV-ACA17		*Height: 21" / Average install: 2-4 hrs
	t be cut   STENCIL PROVIDED. seats, recline handle is replaced   PROVIDED	⇒ Please specify if POWER SEATS   additional parts supplied.
2019-2026	Blazer	
EV-BLZ19		*Height: 21"-23" / Average install: 2-4 hrs
	t be cut   STENCIL PROVIDED.	⇒ Please specify if POWER SEATS   additional parts supplied.
	seats, recline handle is replaced   PROVIDED	*NOT AVAILABLE for ELECTRIC MODEL (Blazer EV)
2015-2022	Canyon / Colorado Extend	
EV-COLX15		*Height: 25" / Average install: 3-5 hrs
Seat shroud must be mod	·	
2015-2022	Canyon / Colorado Crew (	
EV-COLC15		*Height: 24.5" / Average install: 3-5 hrs
Seat shroud must be mod		Lower B-pillar shroud must be modified.
2014-2018	Sierra / Silverado Double C	· · · · · · · · · · · · · · · · · · ·
EV-SILC14		*Height: 24" (4x4) / Average install: 2-4 hrs
Lower B-pillar shroud mus	it be modified. Sierra / Silverado Crew Cal	Seat shroud must be modified / PARTS SUPPLIED.
2014-2018	Sierra / Silverado Crew Car	
EV-SILC14 Lower B-pillar shroud mus	t he modified	*Height: 24" (4x4) / Average install: 2-4 hrs Seat shroud must be modified / PARTS SUPPLIED.
2019-2026	Sierra / Silverado Double C	
EV-SILC19	Sicila / Silverado Double e	*Height: 24.5" (4x4) / Average install: 3-5 hrs
	t be cut   STENCIL PROVIDED.	Height. 24.5 (4x4) / Average install. 5-5 his
<ul><li>Please specify if 12/16</li><li>Please specify if POWE</li></ul>	WAY SEATS   additional parts supplied. R SEATS   additional parts supplied. Buttons reloca	ted to front of seat.
*NOT AVAILABLE for		
2019-2026	Sierra / Silverado Crew Cal	
EV-SILC19	t be out CTENCII DDOVIDED	*Height: 24.5" (4x4) / Average install: 3-5 hrs
	t be cut   STENCIL PROVIDED.  WAY SEATS   additional parts supplied.	
⇒ Please specify if POWE	R SEATS   additional parts supplied. Buttons reloca	ted to front of seat.
*NOT AVAILABLE for		(0500) All 11 (D 11 0 0 1)
2015-2019	Sierra / Silverado HD (2500)	/3500) - All models (Double or Crew Cab)
EV-SILC14		*Height: 25 & 24" • (4X4) / Average install: 2-4 hrs
Lower B-pillar shroud mus		• 2500 model is one inch higher off the ground than the 3500 model.
2020-2026	Sierra / Silverado HD (2500)	/3500) – All models (Double or Crew Cab)
EV-SILC19	t bo cut   STENCII PROVIDED	*Height: 24.5 • / Average install: 2-4 hrs
	t be cut   STENCIL PROVIDED.  WAY SEATS   additional parts supplied.	<ul> <li>Transfer height may vary with tires, wheels and suspension.</li> </ul>
⇒ Please specify if POWE	R SEATS   additional parts supplied. Buttons reloca	ted to front of seat.
*NOT AVAILABLE for		/ / /
2015-2020	Escalade / Suburban / Tah	
EV-SILC14		*Height: 24" (4x4) / Average install: 2-4 hrs
Lower B-pillar shroud mus	to be modified.	a de la
2021-2026	Escalade / Suburban / Tah	
EV-SILC19	A L A CTENCIL PROVIDES	*Height: 24.5" (4x4) / Average install: 3-5 hrs
⇒ Please specify if 12/16	t be cut   STENCIL PROVIDED.  WAY SEATS   additional parts supplied.  R SEATS   additional parts supplied. Buttons reloca	ted to front of seat.
2018-2024	Terrain / Equinox	
EV-TER18		*Height: 21" / Average install: 3-5 hrs
Lower B-pillar shroud mus	t be modified.	Lower seat shroud must be replaced   PROVIDED.
⇒Please specify if POWER *NOT AVAILABLE for		Seat recline handle must be replaced in manual seat model   PROVIDED.
2018-2024	Traverse / Enclave	
EV / TDV / 1.0		*11.1.1.1.1.0.0111/

\*ESTIMATED height ADAPT SOLUTIONS

\*Height: 21" / Average install: 3-5 hrs

Lower B-pillar shroud must be modified.

EV-TRV18

Seat shroud must be modified / STENCIL PROVIDED.

### HI-LIFT NOT AVAILABLE with ASENTO



2018-2026

Odyssey

EV-HDA18

Lower B-pillar shroud must be modified

\*Height: 21" / Average install: 2-4 hrs



2020-2025

Palisade

EV-PAL20

Lower B-pillar shroud must be modified. | STENCIL PROVIDED.

\*NOT AVAILABLE for model with MANUAL SEAT

\*Height: 20 7/8" / Average install: 2-4 hrs



2022-2026

Carnival

EV-KIA22

Lower B-pillar shroud must be modified. | STENCIL PROVIDED.

OEM seat controls wire must be cut and extended

\*Height: 21" / Average install: 4-6 hrs
Power seat controls must be relocated to the front of the seat

\*NOT AVAILABLE for model with MANUAL SEAT (Driver).

2020-2025

Telluride

EV-PAL20 Lower B-pillar shroud must be modified. / STENCIL PROVIDED.

\*NOT AVAILABLE for model with MANUAL SEAT

\*Height: 20 7/8" / Average install: 2-4 hrs



Mercedes-Benz

2016-2023

Metris

EV-MET16

Lower B-pillar shroud must be modified.

\*Height: 22" / Average install: 2-4 hrs



2022-2026

Ariya

EV-ARY22

Lower B-pillar shroud must be modified. | STENCIL PROVIDED

Please specify if equipped with power seats.

\*Height: 21" / Average install: 2-4 hrs MANUAL SEAT model: seat handle must be replaced | provided

2014-2018

**Foreste** 

EV-FOR14

Lower B-pillar shroud must be modified.

\*Height: 20.5" / Average install: 2-4 hrs

\*ESTIMATED height ADAPT SOLUTIONS
BACK



The ASENTO is available in driver & front passenger positions
HI-LIFT NOT AVAILABLE with ASENTO





2015-2020 Tesla X

EV-TESX15 \*Height: 19" / Average install: 2-4 hrs

Lower B-pillar shroud must be modified - STENCIL PROVIDED (Black trims will be supplied for all interiors)

2021-2026 Tesla X

EV-TESX21 \*Height: 19" / Average install: 2-4 hrs

Lower B-pillar shroud must be modified - STENCIL PROVIDED



2021-2026 Sienna

EV-TOY21 \*Height: 20 ¾" / Average install: 2-4 hrs

MANUAL SEAT model: seat handle must be replaced | provided Lower B-pillar shroud must be modified.

(Black trims will be supplied for all interiors) Limited legroom and headroom due to door dimensions.

⇒ Please specify if SEAT is equipped with LUMBAR SUPPORT.

⇒ Please specify if POWERED SEATS. OEM seat trim must be modified - STENCIL NOT PROVIDED FOR RIGHT - Parts supplied. Buttons relocated to front of seat.

2016-2023 Tacoma Access Cab - Suicide door

EV-TACA16 \*Height: 24.5" / Average install: 2-4 hrs

Modification of the doorsill moulding required.

2014-2021 Tundra Double Cab - 4 door (2 smaller)

EV-TUN14 \*Height: 25.5" / Average install: 2-4 hrs

Lower B-pillar shroud must be modified.

2014-2021 Tundra Crew Max - 4 door

EV-TUN14 \*Height: 25.5" / Average install: 2-4 hrs

Lower B-pillar shroud must be modified.

2019-2025 Rav 4

EV-RAV19 \*Height: 23" / Average install: 3-5 hrs

Seat handles must be replaced | PROVIDED. Compatible with HYBRID model.

⇒ Please specify if POWER SEATS | additional parts supplied. Shroud must be modified. Buttons relocated to front of seat.

2014-2019 Highlander

EV-HLD14 \*Height: 22" / Average install: 2-4 hrs

Lower B-pillar shroud must be modified. Compatible with HYBRID model.



### Volkswagen

2018-2026 Atlas

EV-ATL18

Door sill trim panel must be modified. | STENCIL PROVIDED.

\*Height: 21"3/8 / Average install: 4-6 hrs Lower B-pillar shroud must be modified. | STENCIL PROVIDED.

\*ESTIMATED height ADAPT SOLUTIONS
BACK

/ Average install: 2-4 hrs



★ = Available with HI-LIFT

#### 2008-2020 Caravan / Town & Country (

XLS-CHRG08 ★ Available with HI-LIFT

Removal or modification of doorsill moulding required. If power seat, controls may need to be relocated.

\*Height: 18" / Average install: 2-4 hrs

Seat reclining handles will have to be replaced with those provided.

Seat reclining handles will have to be replaced with those provided.

Please specify if equipped with power seats.

\*Height: 27" (4X4)

#### 2003-2009 Ram Reg Cab - 2 door (1500, 2500, 3500)

XLS-RAMR02

If power seat, controls may need to be relocated.

The seatbelt anchor must be connected to our equipment.

OEM Map pocket may need to be removed or modified on some models

#### 2003-2009 Ram Quad Cab- 4 door (1500, 2500, 3500)

XLS-RAMQ02

Lower B-pillar trim to be replaced by one provided for driver side. The OEM B-pillar trim and shrouds need to be trimmed for passenger side

The seatbelt retractor must be relocated to our equipment.

\*Height: 27" (4X4) / Average install: 2-4 hrs Seat reclining handles will have to be replaced with those provided. OEM Map pocket may need to be removed or modified on some models

### 2009-2024

### Ram 1500 Quad Cab CLASSIC- 4 door

XLS-RAMQ09

Tight application. Trims may get scratched.

If power seat, controls may need to be relocated.

Seat reclining handles will have to be replaced with those provided.

\*Height: 27" (4X4) / Average install: 2-4 hrs

Lower B-pillar trim to be replaced by one provided. Removal or modification of doorsill moulding required.

### 2009-2024

### Ram 1500 Crew Cab - 4 door

XLS-RAMQ09

Lower B-pillar trim to be replaced by one provided.

If power seat, controls may need to be relocated.

Tight application. Trims may get scratched.

\*Height: 27" (4X4) / Average install: 2-4 hrs Seat reclining handles will have to be replaced with those provided.

Removal or modification of doorsill moulding required.

### 2006-2009 Ram Mega Cab - 4 big doors (1500, 2500, 3500)

XLS-RAMQ02

Lower B-pillar trim to be replaced by one provided for driver side. The OEM B-pillar trim and shrouds need to be trimmed for passenger side.

Seat reclining handles will have to be replaced with those provided.

\*Height: 27" (4X4) / Average install: 2-4 hrs The seatbelt retractor must be relocated to our equipment.

OEM Map pocket may need to be removed or modified on some models

### Ram 2500/3500 Crew/Mega Cab - 4 doors

XLS-RAMQ09

Lower B-pillar trim to be replaced by one provided.

If power seat, controls may need to be relocated.

Tight application. Trims may get scratched.

\*Height: 27" (4X4) / Average install: 2-4 hrs Seat reclining handles will have to be replaced with those provided. Removal or modification of doorsill moulding required.

### 2007-2018

### Jeep Wrangler - 4 door

XLS-WRG07

Lower B-pillar trim to be replaced by one provided.

\*NOT AVAILABLE for JL model (2018)

\*Height: 27.5" (4X4) / Average install: 2-4 hrs Seat reclining handles will have to be replaced with those provided.



**★** = Available with **HI-LIF-T** 

2006-2008♦ Mark LT - 4 door

XLS-F150C04

\*Height: 26.5" (4X4) / Average install: 2-4 hrs Tight application. Trims may get scratched.

Removal or modification of doorsill moulding required. If power seat, controls may need to be relocated.

2004-2008♦ F-150 Reg Cab - 2 door

XLS-F150S04

\*Height: 26.5" (4X4) / Average install: 2-4 hrs Tight application. Trims may get scratched.

Removal or modification of doorsill moulding required. If power seat, controls may need to be relocated.

2009-2010♦ F-150 Reg Cab - 2 door, small suicide door

XLS-F150C09

The OEM B-pillar trim will need to be trimmed.

If power seat, controls may need to be relocated.

\*Height: 24.5" (4X4) / Average install: 2-4 hrs Tight application. Trims may get scratched.

Removal or modification of doorsill moulding required.

2004-2008♦ F-150 Super Cab - Suicide door

XLS-F150S04

\*Height: 26.5" (4X4) / Average install: 2-4 hrs

Removal or modification of doorsill moulding required. If power seat, controls may need to be relocated.

Tight application. Trims may get scratched.

2009-2014♦ F-150 Super Cab - Suicide door

XLS-F150S09

\*Height: 26.5" (4X4) / Average install: 2-4 hrs

The OEM B-pillar trim will need to be trimmed. NOT AVAILABLE for model with ONLY 2 DOORS.

Removal or modification of doorsill moulding required.

2015-2026 F-150 Super Cab - Suicide door

VIC 5450045

XLS-F150S15 \*Height: 26.5" (4X4) / Average install: 2-4 hrs

Interior door panel must be modified | STENCIL & REPLACEMENT CUTOUT PROVIDED

2011-2016♦ Raptor Super Cab - Suicide door

XLS-F150S09

\*Height: 26.5" (4X4) / Average install: 2-4 hrs

The OEM B-pillar trim will need to be trimmed. Removal or modification of doorsill moulding required.

2017-2026 Raptor Super Cab - Suicide door

XLS-F150S15 \*Height: 27.5" (4X4) / Average install: 2-4 hrs

Interior door panel must be modified | STENCIL & REPLACEMENT CUTOUT PROVIDED



**★** = Available with **HI-LIFT** 

2004-2008♦ F-150 Super Crew Cab - 4 door

XLS-F150C04 \*Height: 26.5" (4X4) / Average install: 2-4 hrs

The OEM B-pillar trim will need to be trimmed. Tight application. Trims may get scratched.

If power seat, controls may need to be relocated. Removal or modification of doorsill moulding required.

2009-2014♦ F-150 Super Crew Cab - 4 door

XLS-F150C09 \*Height: 25.5" (4X4) / Average install: 2-4 hrs

The OEM B-pillar trim will need to be trimmed.

The seat belt detonator must be relocated to the floor adaptor.

2015-2017 F-150 Super Crew Cab - 4 door

XLS-F150C15 \*Height: 24.5" (4X4) / Average install: 2-4 hrs

The OEM B-pillar shroud will need to be trimmed | STENCIL PROVIDED.

Tight application. Trims may get scratched.

If power seat, controls may need to be relocated. Removal or modification of doorsill moulding required.

2011-2016♦ Raptor Super Crew Cab - 4 door

XLS-F150C09 \*Height: 25.5" (4X4) / Average install: 2-4 hrs

The OEM B-pillar trim will need to be trimmed. The seat belt detonator must be relocated to the floor adaptor.

2008-2016♦ F-250, F-350, F-450 Super Cab - Suicide door

XLS-F250S08 \*Height: 27" (4X4) / Average install: 2-4 hrs

Tight application. Trims may get scratched. Removal or modification of doorsill moulding required.

If power seat, controls may need to be relocated.

This installation requires bolting to the rocker panel.

2008-2016♦ F-250, F-350, F-450 Crew Cab - 4 door

XLS-F250C08 \*Height: 27" (4X4)

Tight application. Trims may get scratched.

Removal or modification of doorsill moulding required.

If power seat, controls may need to be relocated.

The seatbelt retractor must be relocated to our equipment.

This installation requires bolting to the rocker panel.

The OEM B-pillar trim will need to be trimmed.

2017-2026 F-250, F-350, F-450 Super Cab - Suicide door

XLS-F150S15 • \*Height: 27" (4X4) / Average install: 2-4 hrs

Interior door panel must be modified, STENCIL & CUTOUT PROVIDED • 2017 Ford F-250 & F-350 4X4 model sit 1" lower than the 2017 F-150.

2011-2014 Sierra / Silverado Crew Cab-1500- 4 door

XLS-EDG11 \*Height: 21"

Seat reclining handles will have to be replaced with those provided.

The OEM B-pillar trim will need to be trimmed.

2011-2019 Explorer

XLS-EXL11 \*Height: 23.5"

The OEM B-pillar trim will need to be trimmed.

Tight application. Trims may get scratched.



★ = Available with HI-LIFT

2007-2010 **Avalanche** 

XLS-SILC07 \*Height: 24"-25" (4X4) / Average install: 2-4 hrs

Tight application. Trims may get scratched.

2011-2013 Avalanche

XLS-SILC11 \*Height: 24"-25" (4X4) / Average install: 2-4 hrs

Lower B-pillar trim to be replaced by one provided. If power seat, controls may need to be relocated.

Canyon / Colorado Extended Cab - Suicide door 2004-2012

XLS-COLX04 \*Height: 21" (2X4) / Average install: 2-4 hrs

Removal or modification of doorsill moulding required. Seat reclining handles will have to be replaced with those provided.

1999-2006 Sierra / Silverado Regular Cab - 2 door

\*Height: 24"-25" (4X4) / Average install: 2-4 hrs XLS-SILR99

Tight application. Trims may get scratched. If power seat, controls may need to be relocated.

OEM Map pocket may need to be removed or modified on some models 1999-2002 Sierra / Silverado Extended Cab - Without suicide door

XLS-SILR99 \*Height: 24"-25" (4X4) / Average install: 2-4 hrs

This installation requires bolting to the rocker panel. Removal or modification of doorsill moulding required. If power seat, controls may need to be relocated. The OEM B-pillar trim will need to be trimmed.

OEM Map pocket may need to be removed or modified on some models

2001-2006 Sierra / Silverado Extended Cab - Suicide door

XLS-SILX03 •\*Height: 24"-25" (4X4) / Average install: 2-4 hrs

Seat reclining handles will have to be replaced with those provided. • Transfer height may vary with tires, wheels and suspension.

If power seat, controls may need to be relocated. Removal or modification of doorsill moulding required.

This installation requires bolting to the rocker panel. The OEM map pocket may need to be removed. OEM Map pocket may need to be removed or modified on some models

Sierra / Silverado Extended Cab - Suicide door

XLS-SILX07 \*Height: 24"-25" (4X4) / Average install: 2-4 hrs

The seatbelt retractor must be relocated to our equipment. Removal or modification of doorsill moulding required

OEM Map pocket may need to be removed or modified on some models Sierra / Silverado Crew Cab - 4 door 2007-2010

XLS-SILC07 \*Height: 24"-25" (4X4) / Average install: 2-4 hrs

Tight application. Trims may get scratched.

OEM Map pocket may need to be removed or modified on some models

2011-2013 Sierra / Silverado Crew Cab - 4 door XLS-SILC11 \*Height: 24"-25" (4X4) / Average install: 2-4 hrs

If power seat, controls may need to be relocated. Lower B-pillar trim to be replaced by one provided.

OEM Map pocket may need to be removed or modified on some models

Sierra / Silverado HD (2500/3500) - Extended Cab - Suicide door 2007-2014

XLS-SILX07 \*Height: 24"-25" (4X4) / Average install: 2-4 hrs

Tight application. Trims may get scratched.

OEM Map pocket may need to be removed or modified on some models

Sierra / Silverado HD (2500/3500) - Crew Cab - 4 door 2007-2010

XLS-SILC07 \*Height: 24"-25" (4X4) / Average install: 2-4 hrs

Tight application. Trims may get scratched.

OEM Map pocket may need to be removed or modified on some models

2011-2014 Sierra / Silverado HD (2500/3500) - Crew Cab - 4 door

\*Height: 24"-25" (4X4) / Average install: 2-4 hrs XLS-SILC11

If power seat, controls may need to be relocated. Lower B-pillar trim to be replaced by one provided

OEM Map pocket may need to be removed or modified on some models

2007-2010 Escalade / Suburban / Tahoe / Yukon - All models

\*Height: 24"-25" (4X4) / Average install: 2-4 hrs XLS-SILC07

Tight application. Trims may get scratched.

OEM Map pocket may need to be removed or modified on some models

2011-2014 Escalade / Suburban / Tahoe / Yukon - All models

\*Height: 24"-25" (4X4) / Average install: 2-4 hrs XLS-SII C11

Lower B-pillar trim to be replaced by one provided. If power seat, controls may need to be relocated.

OEM Map pocket may need to be removed or modified on some models

\*ESTIMATED height

ADAPT SOLUTIONS



2005-2010♦ Odyssey

XLS-HDA05 ★ Available with HI-LIFT

Tight application. Trims may get scratched.

The seatbelt anchor must be connected to our equipment.

\*Height: 18" / Average install: 2-4 hrs If power seat, controls may need to be relocated.

2011-2017♦ Odyssey

XLS-HDA11

Tight application. Trims may get scratched.

The OEM B-pillar trim will need to be trimmed.

\*Height: 21" / Average install: 2-4 hrs If power seat, controls may need to be relocated.



2015-2021 Sedona

XLS-KIA16

Lower B pillar shroud needs to be cut | STENCIL PROVIDED.

\*Height: 20.5" / Average install: 2-4 hrs

Seat shroud must be cut | STENCIL & MODIFIED TRIM PROVIDED



2004-2010♦ Sienna

XLS-TOY04 ★ Available with HI-LIFT

If power seat, controls may need to be relocated.

\*Height: 18" / Average install: 2-4 hrs

2011-2020♦ Sienna

XLS-TOY11 ★ Available with HI-LIFT

Tight application. Trims may get scratched.

\*Height: 22" / Average install: 2-4 hrs If power seat, controls may need to be relocated.

2005-2015 Tacoma Access Cab - Suicide door

XLS-TACA05

\*Height: 24.5" (4X4) / Average install: 2-4 hrs

The OEM seat and door trim will need to be trimmed

2005-2015 Tacoma Double Cab - 4 reg. door

XLS-TACD05

\*Height: 24.5" (4X4) / Average install: 2-4 hrs

The OEM B-pillar trim will need to be trimmed. Removal or modification of doorsill moulding required.

2016-2023 Tacoma Double Cab – 4 reg. door

XLS-TACD16

\*Height: 25.5" (4X4) / Average install: 2-4 hrs

The OEM B-pillar trim removed and replaced | PROVIDED

2010-2024 4 Runner

XLS-T4R10

\*Height: 25.5" (4X4) / Average install: 2-4 hrs

The OEM B-pillar trim will need to be trimmed.

2006-2012♦ RAV 4

Tight application. Trims may get scratched

XLS-RAV06

\*Height: 21.5" / Average install: 2-4 hrs

Seat reclining handles will have to be replaced with those provided.

If power seat, controls may need to be relocated.

XLS-RAV13

\*Height: 21" / Average install: 2-4 hrs

Tight application. Trims may get scratched.

Seat reclining handles will have to be replaced with those provided.

NOT AVAILABLE if equipped with power seats

## XL-SEAT | PAGE 6 OF 6

The XL-SEAT is available in driver & front passenger positions



★ = Available with HI-LIF-T

2009-2012

Routan

XLS-CHRG08 ★ Available with HI-LIFT
Seat reclining handles will have to be replaced with those provided.
If power seat, controls may need to be relocated.

\*Height: 18" / Average install: 2-4 hrs Removal or modification of doorsill moulding required.

# **SPEEDY-LIFT**





### **FIND A DEALER**

Looking for a dealer near you or a client, use our interactive map to find one.



### **HOW IT WORKS VIDEO**

In just a few minutes, see all the key features of the product.



### **PRODUCT VIDEO**

Overview of the ASENTO & SPEEDY-LIFT in motion with music.



### **HIGHLIGHTS:**

- Fast moving complete with automatic locking mechanism.
- Takes up very little space; in most applications only one seat is removed.
- 95 lbs capacity.
- 3-year warranty.
- Adapter available for folding chairs less than 2 lbs and easily removed.
   Part # SL-WCBR-00



### THINGS TO NOTE

Designed for mid-row in minivans, manual rigid or folding frame wheelchair.

# SPEEDY-LIFT QUICK REFERENCE The SPEEDY-LIFT is available in the mid-row on the driver & passenger side

		The SPEEDY-LIFT is available in the mid-row on the CHRYSLER	ille uriver & passeriger side
Caravan / Town & 0	Country - Sto		<b>♦</b> 2005 - 2007
Town & Country - S		W 14 GO	2008 - 2011
Caravan / Town & C	Country		<b>♦</b> 2008 - 2020
Grand Caravan			<b>*</b> 2021 - <b>202</b> 6
Pacifica			<b>*</b> 2017 - 2026
Voyager * (USA)			2020 - 2026
		HONDA	
Odyssey			<b>♦</b> 2005 - 2010
Odyssey			<b>♦</b> 2011 - 2017
Odyssey			2018 - 2026
Ouyssey		KIA	2010 - 2020
Sedona		INIA	<b>*</b> 2015 - 2021
Carnival			
Carnivai	_		*2022 - 2026
		MAZDA	
Mazda 5 <b>*Disconti</b>	nued in USA	in 2015, 2017 in Canada.	<b>♦</b> 2006 - 2017
		MERCEDES	
Metris			2016 - 2023
		TESLA	
Х		12221	<b>*</b> 2015 - 2026
		ТОҮОТА	
Sienna		191917	<b>♦</b> 2004 - 2010
Sienna - 7 passenge	or		<b>♦</b> 2011 - 2020
		er side note: all mid-row seats will be removed)	<b>♦</b> 2011 - 2020
Sienna - 7 passenge			2021 - 2026
Sienna - 8 passenge	er ( <mark>*</mark> passeng	er side note: all mid-row seats will be removed)	2021 - 2026
		VOLKSWAGEN	
Routan			<b>♦</b> 2009 - 2012
	Notes to	o specific applications marked * on the SPEEDY-LIFT QUICK REFERENCE	
Grand Caravan	2021-2026	*NOT AVAILABLE passenger side for model with Bench seat & 8 passengers LXi model.	
Toyota Sienna	2011-2020	*NOT AVAILABLE for models with OEM footrest.	
Pacifica	2017-2026	*NOT AVAILABLE for PINNACLE (2021 & up) model	
Voyager	2020-2026	*NOT AVAILABLE passenger side for model with Bench seat & 8 passengers LXi model.	
Sedona Carnival	2015-2021	*NOT AVAILABLE for models with OEM footrest   Discontinued in Canada 2019-2020 model.  *NOT AVAILABLE for 7 passenger model.	
Tesla X	2022-2026	*NOT AVAILABLE for 7 passenger model.  *NOT AVAILABLE passenger side for model with Bench seat.	
Tesla X	2021-2026	*NOT AVAILABLE for model with Bucket Seat.	
		ipping LEAD TIME of installation kit might vary. Contact us directly for estimated lead	l time

### The **SPEEDY-LIFT** is available in the mid-row on the driver & passenger side



2005-2007	Caravan / Town & Country -	· Stow 'N Go	
SP-CHRG05	*Average install: 1.5-2.5 hours	The OEM seat will remain trapped in the floor if a <b>SPEEDY-LIFT</b> is installed.	
2008-2011	Town & Country - Swivel 'N (	Go	
SP-CHRG05	*Average install: 1.5-2.5 hours		
2008-2020	Grand Caravan / Town & Co	ountry	
SP-CHRG05	*Average install: 1.5-2.5 hours	The OEM seat will remain trapped in the floor if a <b>SPEEDY-LIFT</b> is installed.	
2021-2026	Grand Caravan		
SP-CHR20	*Average install: 1.5-2.5 hours	⇒Please specify driver or passenger side application - Left or Right.	
NOT AVAILABLE PASSENGER side model with bench seat. NOT AVAILABLE for BUCKET SEATS model without STOW 'N GO.		Please specify 2 <sup>nd</sup> Row Seating: Bench or Stow 'N Go If <b>Stow 'n Go</b> , OEM seat will remain trapped in the floor.	
2017-2026	Chrysler Pacifica		
SP-CHR17	*Average install: 1.5-2.5 hours	The OEM seat will remain trapped in the floor if a <b>SPEEDY-LIFT</b> is installed.	
NOT AVAILABLE for PINNACLE	E (2021 & up) model	<ul><li>◆Please specify driver or passenger side application - Left or Right.</li><li>◆Please specify Hybrid Model.</li></ul>	
2020-2026	Voyager (USA)		
SP-CHR20	*Average install: 1.5-2.5 hours	⇒Please specify driver or passenger side application - Left or Right.	
NOT AVAILABLE PASSENGER S		⇒Please specify 2 <sup>nd</sup> Row Seating: Bench or Stow 'N Go	
NOT AVAILABLE for BUCKET SEATS without STOW 'N GO.  If Stow 'n Go, OEM seat will remain trapped in the floor.			



2005-2010	Odyssey	
SP-HDA05	*Average install: 1.5-2.5 hours  Please specify driver or passenger side application - Left	or Right.
2011-2017	Odyssey	
SP-HDA11	*Average install: 1.5-2.5 hours In the 8-passenger model, the jump seat must be removed.	
2018-2026	Odyssey	
SP-HDA18	*Average install: 1.5-2.5 hours In the 8-passenger model, the jump seat must be removed.	



2015-2021	Sedona	
SP-KIA16	*Average install: 1.5-2.5 hours	NOT AVAILABLE for models with OEM footrest.  Discontinued in Canada 2019-2020 model.
2022-2026	Carnival	
SP-KIA22	*Average install: 1.5-2.5 hours	NOT AVAILABLE for 7 passenger model.



The **SPEEDY-LIFT** is available in the mid-row on the driver & passenger side



2006-2017 Mazda 5

SP-MZD506 \*Average install: 1.5-2.5 hours \*Mazda 5 discontinued in USA in 2015; 2017 in Canada.



2016-2023

SP-MET16 \*Average install: 1.5-2.5 hours ALL MIDROW SEATS MUST BE REMOVED



2015-2026

SP-TESX15 \*Average install: 4 - 5 hours **NOT AVAILABLE** PASSENGER side model with bench seat. NOT AVAILABLE for BUCKET SEAT model 2021+

⇒Please specify 2<sup>nd</sup> Row Seating: Bench or Bucket

2004-2010	Sienna
SP-TOY04	
2011-2020	Sienna   7 or 8 passenger minivans
SP-TOY11	*Average install: 1.5-2.5 hours In the right or passenger side of the 8-passenger minivan,
	ALL MIDROW SEATS MUST BE REMOVED
2021-2026	Sienna   7 or 8 passenger minivans
SP-TOY21	*Average install: 1.5-2.5 hours In the right or passenger side of the 8-passenger minivan,
	ALL MIDROW SEATS MUST BE REMOVED



### Volkswagen

2009-2012	Routan	
SP-CHRG05	*Average install: 1.5-2.5 hours	The OEM seat will remain trapped in the floor if a <b>SPEEDY-LIFT</b> is installed.

# HI-LIFT





## **FIND A DEALER**

Looking for a dealer near you or a client? Use our interactive map to find one.



### **HOW IT WORKS VIDEO**

In just a few minutes, see all the key features of the product.



### **PRODUCT VIDEO**

Overview of the XL-SEAT & HI-LIFT in motion.



### **HIGHLIGHTS:**

- Very compact and easy to use.
- Manual track allows for additional space inside the vehicle. Seat can be used in vehicle if chair is not being transported.
- Makes a great pair with the XL-SEAT.
- 75 lbs capacity.
- 3 year warranty.



### THINGS TO NOTE

Only available in limited minivan applications. See list on next page. Ideally for rigid frame chairs. Folding chairs are not likely to fit 'height wise' in the door opening and therefore would be stowed not folded.

# HI-LIFT QUICK REFERENCE

CHRYSLER			DRIVER	FRONT PASSENGER
Caravan / Grand Caravan / Town & Country	*	1991 - 2007	✓	✓
Caravan / Grand Caravan / Town & Country	*	2005 - 2007	✓	NOT AVAILABLE
Caravan / Grand Caravan / Town & Country	*	2008 - 2020	✓	✓
Voyager - Short & Long wheelbase	*	1991 - 2003	✓	✓
FORD			DRIVER	FRONT PASSENGER
Freestar / Monterey	*	2004 - 2007	✓	✓
Windstar	*	1999 - 2003	✓	✓
GENERAL MOTORS			DRIVER	FRONT PASSENGER
Montana/Silhouette/Transport	*	1997 - 2004	✓	✓
Terreza/Uplander/Relay/Venture	*	1997 - 2004	✓	✓
Montana/Silhouette/Transport	*	2005 - 2009	✓	✓
Terreza/Uplander/Relay/Venture	*	2005 - 2009	✓	✓
HONDA			DRIVER	FRONT PASSENGER
Odyssey	*	1999 - 2004	✓	✓
Odyssey	*	2005 - 2010	✓	✓
KIA			DRIVER	FRONT PASSENGER
Sedona	*	2006 - 2012	✓	✓
NISSAN			DRIVER	FRONT PASSENGER
Quest	*	2011 - 2016♦	✓	✓
TOYOTA			DRIVER	FRONT PASSENGER
Sienna	*	2004 - 2010	✓	✓
Sienna	*	2011 - 2020	✓	✓
VOLKSWAGEN			DRIVER	FRONT PASSENGER
Routan	*	2009 - 2012	✓	✓
♦ Due to the age of the application, shipping LEAD TIME of installation kit may vary. Contact us directly for an estimated lead time.				





### **FIND A DEALER**

Looking for a dealer near you or a client? Use our interactive map to find one.



### **PRODUCT VIDEO**

Overview of the XL-BOARD & SPEEDY-LIFT in motion.



### **HIGHLIGHTS:**

- 275 lbs capacity. Static board, no motor. Easy to use; folds up and out of the way.
- Ideal vehicle for those that want a sedan with space for their wheelchair. Works great when paired with the SPEEDY-LIFT.
- Keep up to 5 seats depending on the size of the wheelchair.



### THINGS TO NOTE

This product is only available for the MAZDA 5. No other vehicles. Mazda 5 discontinued in 2015 in USA and 2017 in Canada.




# **XL-BOARD QUICK REFERENCE**

MAZDA			
Mazda 5 *	2006 - 2017	XLB-MZD506	

<sup>\*</sup>Mazda 5 discontinued in USA in 2015; 2017 in Canada.

# **POWER-PULL**

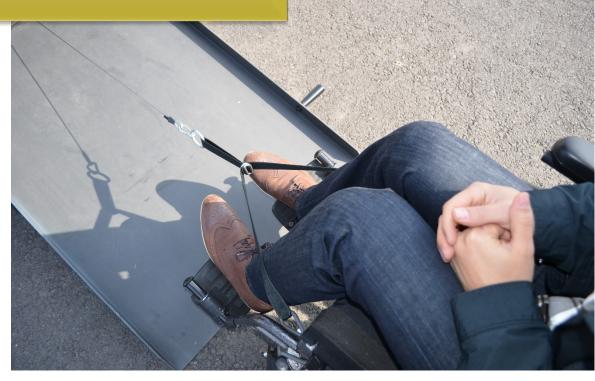



### **FIND A DEALER**

Looking for a dealer near you or a client? Use our interactive map to find one.



### **HOW IT WORKS VIDEO**

In just a few minutes, see all the key features of the product.



### **PRODUCT VIDEOS**

Overview of the POWER-PULL in a side entry and rear entry lowered floor minivan, in motion.



### **HIGHLIGHTS:**

- Available in two models, one designed specifically for side entry and one designed specifically for rear entry.
- Does not take up space on the floor. Allows easy maneuvering.
- Multiple safety features and wireless pendant.
- Release feature allows easier positioning.
- 350 lbs capacity. 15 feet of strong, stainless steel cable.
- 3 year warranty.



### THINGS TO NOTE

Requires user to hook onto their wheelchair. Button must be depressed to make unit move.





# POWER-PULL QUICK REFERENCE

LOWERED FLOOR MINIVAN	
SIDE ENTRY	PP000-01
REAR ENTRY	PR000-01